
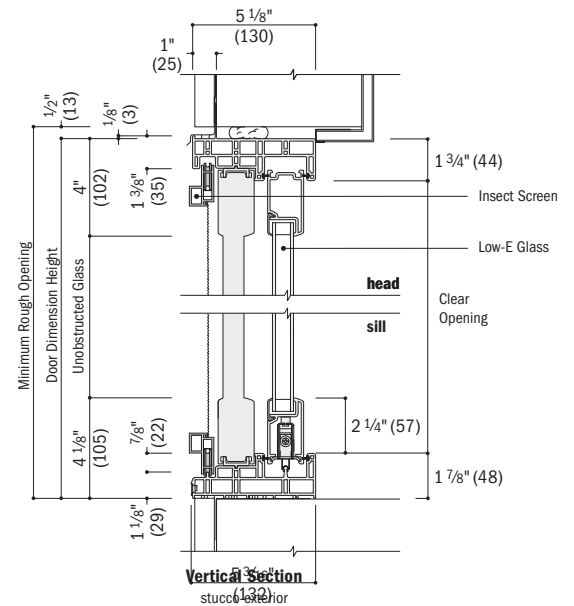
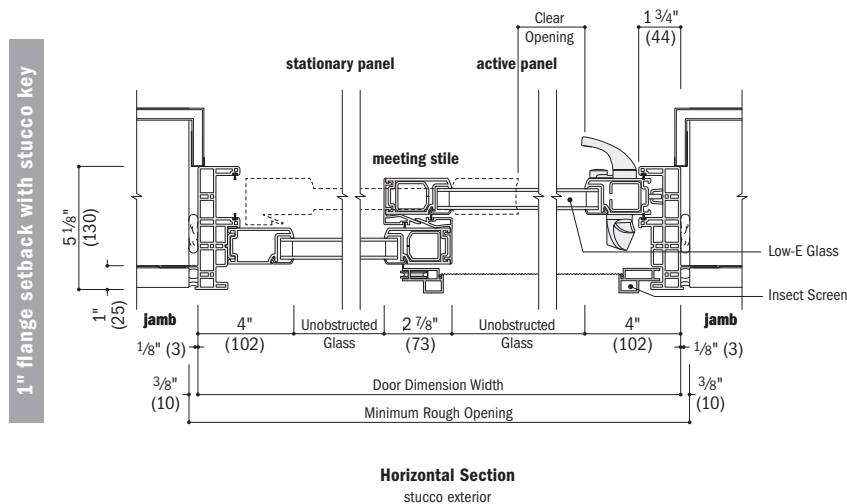
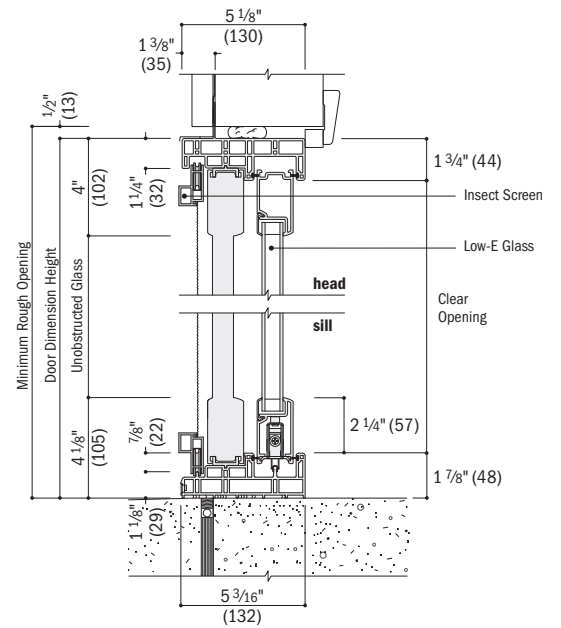


Gliding Patio Door Details

Scale 1 1/2" (38) = 1'-0" (305) – 1:8

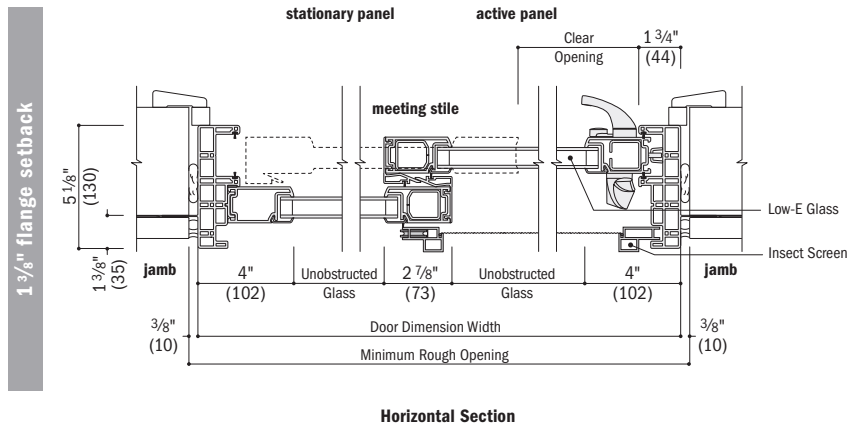

- Drip cap is required to complete door installation as shown, but may not be included with the door. Use of drip cap is recommended for proper installation.
- **Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Details are for illustration only and are not intended to represent product installation methods or materials. Refer to product installation guides at andersenwindows.com.
- Dimensions in parentheses are in millimeters.


Vertical (ribbon) Joining Details

Scale 1 1/2" (38) = 1'-0" (305) – 1:8

Overall Door-Sidelight or Sidelight-Sidelight Dimension Width Sum of individual door-sidelight or sidelight-sidelight widths plus 3/4" (19).

Overall Minimum Rough Opening Width Overall dimension width plus 3/4" (19).

The addition of joining materials will affect the overall rough opening dimension.

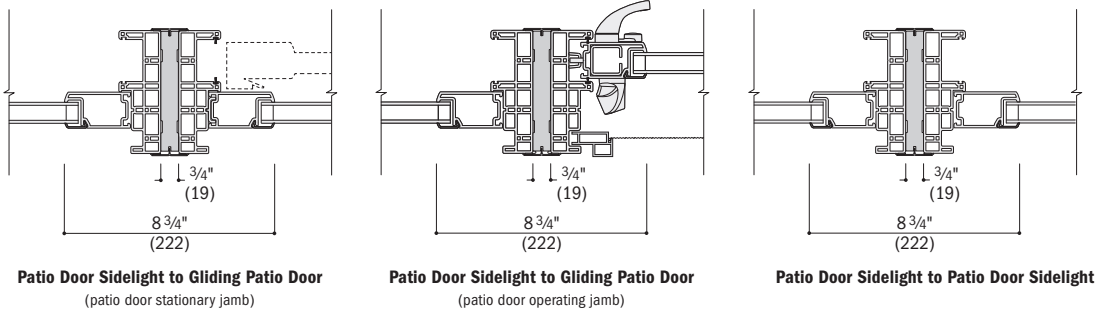


Horizontal (stack) Joining Details

Scale 1 1/2" (38) = 1'-0" (305) – 1:8

Overall Transom/Door or Transom/Sidelight Dimension Height Sum of individual transom/door or transom/sidelight heights plus 3/4" (19).

Overall Minimum Rough Opening Height Overall dimension height plus 1/2" (13).

The addition of joining materials will affect the overall rough opening dimension.

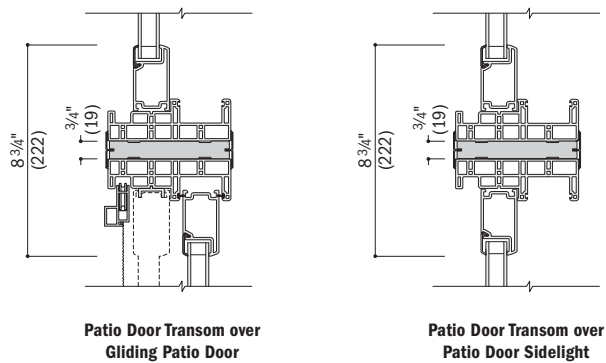

- Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Details are for illustration only and are not intended to represent product installation methods or materials. Refer to product installation guides at andersenwindows.com.
- Structural performance of any combination is only as high as the lowest structural performance of any individual window or join in the combination.
- Contact your Andersen supplier for information on meeting wind load requirements for patio door joined combinations.