









# **ABOUT US**

## Custom LED manufacturing experts

LED Tranquility, Inc., A.K.A. "LEDT" was founded in 2008 and is a high-tech privately held woman owned small business specializing in the research and development, design, production, engineering and sales of both standard and custom LED display solutions.

LEDT is headquarted in Vernon Hills, Illinois having manufacturing facilities in both Hong Kong and Shenzhen China. LEDT's Vernon Hills headquarters is a 66,000 square foot facility, additionally LEDT has storage facilities in both Las Vegas, Nevada and Atlanta, Georgia.

LEDt provides a wide range of off the shelf products covering both indoor and outdoor full color LED video wall, HD fine pixel pitch displays, Transparent displays, curved LED, Flexible LED and more.

LEDT products and services are used by municipalities, real estate, businesses, broadcasting, US Army, US Navy, US Air Force, US Marine Corps, Schools and many more. LEDT strictly adheres to its product leading technology strategy and it's unique, 3 tiered talent development strategy to bring together top notch talented professionals with superior manufacturing technology. When the rest of our competitors were still manufacturing basic square video wall panels, LEDT was pushing the limits of full custom solutions. We have dozens of patents and hundreds of software copyrights making us an innovation leader in our industry.

LEDT has distributors in 26 countries. Our company is committed to providing the best LED custom and standard solutions to every customer all over the world. We warranty our product and stand behind it's quality in everything we do. We see our customers as partners, not just as a one time purchase agreement.

# **ABOUT LEDT**

# **COMPANY PROFILE**

LED Tranquility, Inc. was founded in 2008 3 main manufacturing facilities 2 additional storage facilities in the US

## **CASE STUDIES**

Every image in this brochure reflects our high level of professional detail and commitment to providing a superior product

#### **PRODUCTS**

Indoor Flexible LED Displays
Outdoor Flexible LED Displays
LED Video Stands
Indoor & Outdoor Full Color SMD LED Displays
Indoor & Outdoor customized LED Displays
Small Pixel Pitch LED Displays
Rental LED Displays
Front & Back Maintenance LED Displays
Outdoor Energy Saving LED Displays
Outdoor Single & Double Color LED Module Series





#### FEATURES

- Waterproof IP 65/IP67
- Die –Casting Aluminum cabinet ,Iron cainet, both have high strength
- High refresh ,High brightness, High gray, Lower power consumption
- Showing excellent visual effect at dfferent vewing angle
- Lock Design ,Quickly assembled
- Adjust brightness throuught sensor
- Easy Maintenance ,module supports front@rear maintenance



### SPECIFICATIONS

SERIES	ЗММ	4MM	4MM	5MM	5MM	6MM	6.67MM	8MM	10MM
Pixel Pitch(mm)	3mm	4mm	4mm	5mm	5mm	6mm	6.67mm	8mm	10mm
LED Configuration	SMD1921	SMD1921	SMD1921	SMD2727	SMD2727	SMD3535	SMD3535	SMD3535	SMD3535
Distance(m)	≧3	≧4	≧4	≧5	≧5	≧6	≧6.67	≧8	≧10
Brightness(cd/m²)	≧5000	≧5000	≧6500	≧5500	≧5500	≧6000	≧5500	≧6000	≧5500-8500
Pixel density(dots/m²)	111111	62500	62500	40000	40000	27777	22470	15625	10000
View angle(°)	140°	140°	140°	140°	140°	140°	140°	140°	140°
Refresh	≧1920	≧1920	≧1920	≧1920	≧1920	≧1920	≧1920	≧1920	≧1920
Refresh(Hz)	≧3840	≧3840	≧3840	≧3840	≧3840	≧3840	≧3840	≧3840	≧3840
Module size(mm)	192×192	256×128	320×160	160×160	320×160	192×192	320×160	256×128	320×164
0-6:	576×576	512×512	640×640	640x640	640x640	576×576	640x640	768×768	640×640
Cabinet size(mm)	768×768	768×768	768×768	960×960	960×960	768×768	960×960	960×960	960×960
Drive Mode(can)	1/16	1/16	1/8	1/8	1/8	1/8	1/6	1/4	1/2/4
Enviroment	IP65								
Max Power(w/m²)	900	800	900	800	1000	900	650	1000	600-1200
Voltage(v)	110-245	110-245	110-245	110-245	110-245	110-245	110-245	110-245	110-245
Weight (kgm²)	26	26	28	26	27	26	29	32	32







### **FEATURES**

- Waterproof IP 65/IP67
- Lock Design , Quickly Lock
- High Refresh ,High Brightness,High Gray
- Die-casting Aluminum cabinet
- High Stable 9PIN connector
- Low Power Consumption ,Energy –Efficient
- Easy assembly and quick disassembly



#### SPECIFICATIONS

SERIES	3.91MM	4.81MM	5.95MM	6.25MM
LED Configuration	SMD1921	SMD1921/2727	SMD2727	SMD2727/3535
Distance(m)	≧3.91	≥4.81	≧5.95	≧6.25
Brightness(cd/m²)	5500	4500	4500	4500
Pixel density(dots/m²)	65536	43264	28224	25600
View angle(°)	140°	140°	140°	140°
Refresh(Hz)	3840	3840	3840	3840
Module size(mm)	250×250	250x250	250×250	250x250
Cabinet size(mm)	500×500	500x500	500x500	500x500
Drive Mode(can)	1/16	1/13	1/7	1/10
Enviroment	IP65	IP65	IP65	IP65
Max Power(m²)	800	800	1200	1200
Voltage(v)	110-245	110-245	110-245	110-245
Weight (kg)	11.8	11.5	11.5	11.5
Popular	High End	High End	High End	Hot






09/10





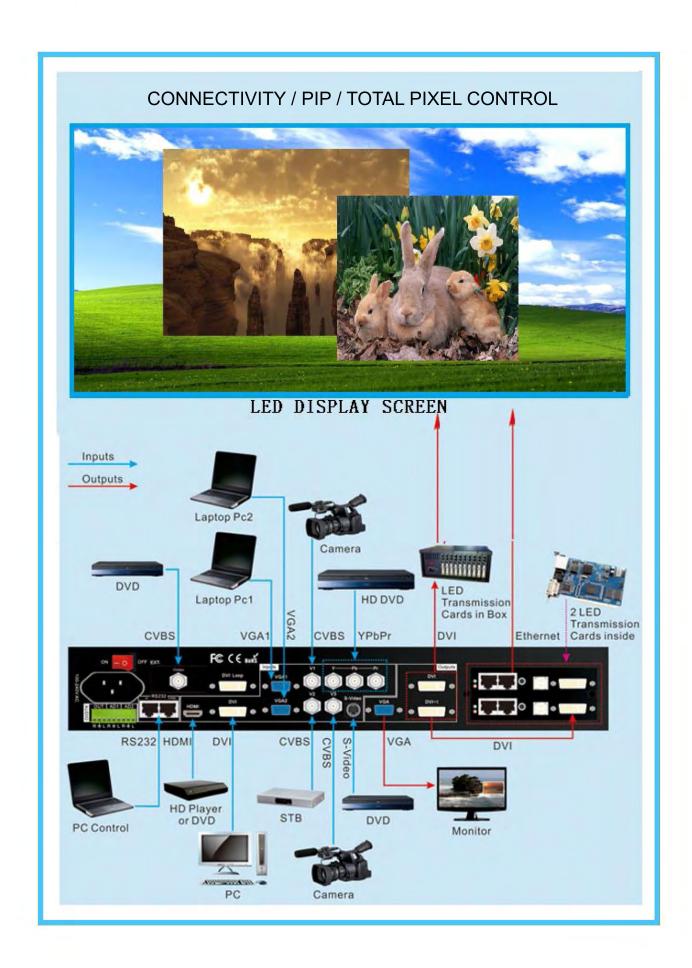











We have contracts with 100's of different carriers with all types of shipping methods. We will provide you options with the best possible shipping solutions to keeps the costs of receiving your products at the best price with the best possible service.

- 1. All products come with either a FIVE or THREE year warranty, depending on the type.
- 2. This warranty includes labor which extends to the LED Modules, Power Supplies, Control systems and hardware.
- 3. Shipping costs are paid by the customer. Unless product was received and unused.
- 4. We accept returns however they will be replaced with the same products from original purchase agreement.
- 5. Any accidental damage that may occur during the lifetime of ownership can fixed. We had no issues with "Batching" like other LED manufacturers, so purchasing replacement parts is easy and you don't have to worry about color match. It doesn't matter how old your system is.
- 6. After the warranty is expired we will still provide you replacement parts at cost as you are apart of the LEDT family of customers.

# **OUR WORK**









