



PURE

DESCRIPTION: Paver TEXTURE: Beveled

PALLET OVERVIEW



The use of permeable pavement systems throughout the world has proven effective in reducing storm water runoff while increasing infiltration rates as it returns the water to the environment. The use of permeable pavers also facilitates LEED® certification easier to obtain.

NOTES


See page 33 and 101 for more technical information.

See page 30 for more information about applications.

JOINT WIDTH: 3/8" (10 mm)
% OF SURFACE OPENING: 5.0 %
INFILTRATION RATE: 726 in./hr (18 440 mm/hr)

Specifications per pallet	Imperial	Metric
Cubing	90 ft²	8.36 m ²
Approx. Weight	3 175 lbs	1 440 kg
Number of rows	8	
Coverage per row	11.25 ft ²	1.05 m ²
Linear coverage per row	15 lin. ft	4.57 lin. m

	Unit dimensions	in	mm	Units/pallet
A	Height	3 1/4	80	40 units
	Width	9	229	
	Length	9	229	
B	Height	3 1/4	80	40 units
	Width	9	229	
	Length	12	305	
C	Height	3 1/4	80	40 units
	Width	9	229	
	Length	15	381	

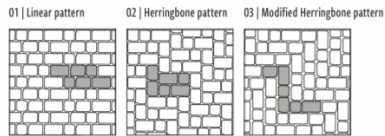

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.



techo-bloc.com

