



**Cambridge®**

IKO.COM



The Trusted Solution  
for a Beautiful Roof.







ARCHITECTURAL

# BEAUTY You Can See. QUALITY You Can Feel.

**NOW THAT IT'S TIME TO REPLACE YOUR ROOF, WHY TAKE ANYTHING FOR GRANTED?** We never do. Since 1951, IKO has been protecting American homes and families just like yours against the elements.

Whether it's elegant and sophisticated or laid-back and casual, or somewhere in-between, **IKO Cambridge® Architectural shingles** come in a wide range of stunning color blends to express your personality, reflect your taste and potentially boost your home's resale value too.

Their modern, laminated two-piece design provides the depth, dimension and texture of genuine wood shakes for an upscale appearance without the upscale price tag. Now unleash your exterior designer and dress up your home with an exciting new look, for less than you might expect.

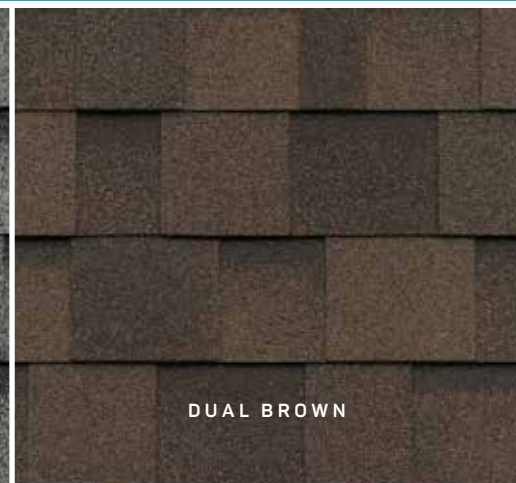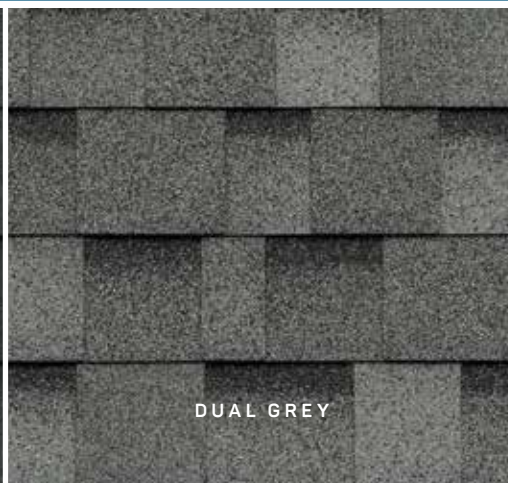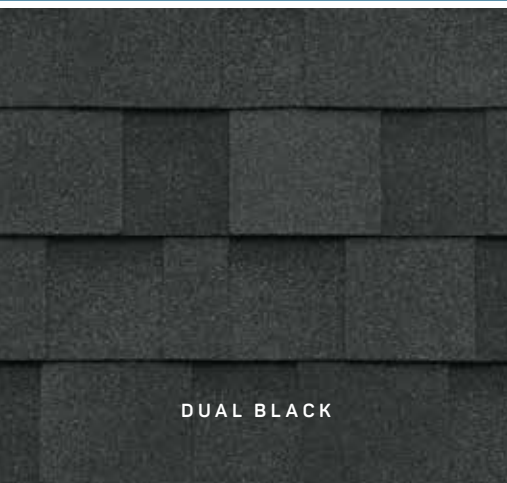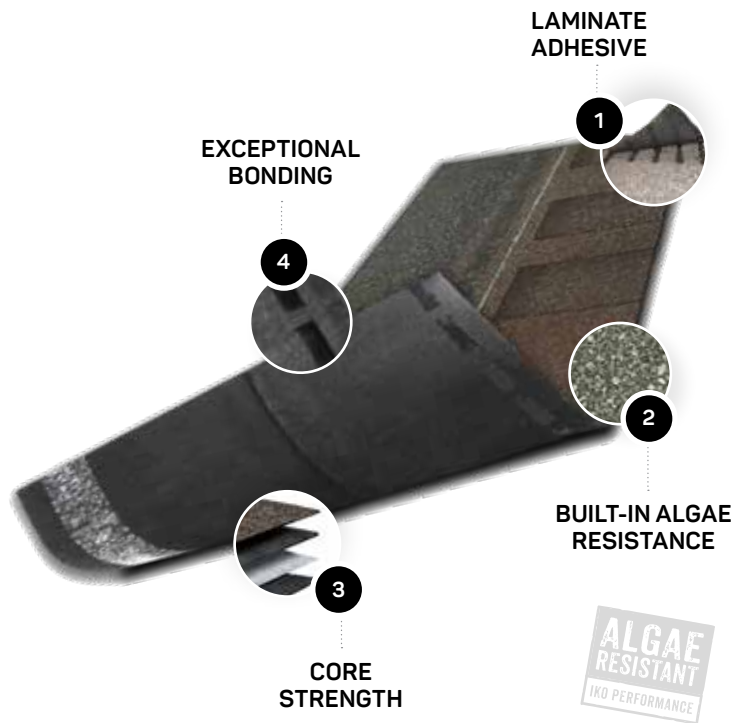

Shingle Color Selected



# PERFORMANCE You Can Trust.

- 1 LAMINATE ADHESIVE.** Five strips of our tough, construction-grade adhesive are used to laminate the shim to the tooth.
- 2 BUILT-IN ALGAE RESISTANCE.** Special colorfast granules embedded in the shingles' surface help inhibit the growth of blue-green algae that can cause unattractive black stains, streaks and discoloration.
- 3 CORE STRENGTH.** Our resilient fiberglass mat is coated top and bottom with weathering asphalt, then surfaced with colored granules. It's heavy-duty for exceptional durability and structural integrity.
- 4 EXCEPTIONAL BONDING.** IKO's FastLock® sealant on the shingles' bottom edge gets extra-tacky when activated by the sun's heat. This creates a strong bond to help ensure maximum protection against wind uplift, blow-off and water penetration.

## THE IKO ADVANTAGE


Limited Warranty <sup>1</sup>	Limited Lifetime <sup>3</sup>
Iron Clad Protection <sup>1</sup>	10 Years (U.S. only)
Limited Wind Warranty <sup>1</sup>	110 mph (177 km/h)
Limited High-Wind Warranty Upgrade <sup>1,2</sup>	130 mph (210 km/h)
Blue-Green Algae Resistant <sup>1</sup>	Yes

## PRODUCT SPECIFICATIONS<sup>4</sup>


Length	40 7/8 in (1038 mm)
Width	13 3/4 in (349 mm)
Exposure	5 7/8 in (149 mm)
Coverage per Bundle	33 1/3 ft <sup>2</sup> (3.1 m <sup>2</sup> )
<i>(3 bundles = 1 full square = 100 sq ft coverage)</i>	

## STANDARDS<sup>5</sup>

ASTM D3462, ASTM D3018, ASTM D3161 – Class F, ASTM D7158 – Class H, ASTM E108/UL 790 – Class A.

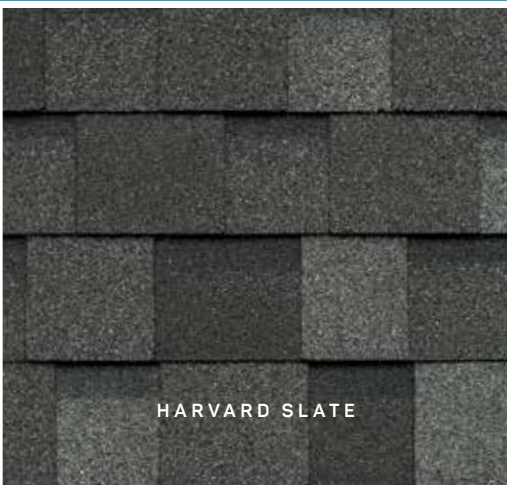

HARVARD SLATE

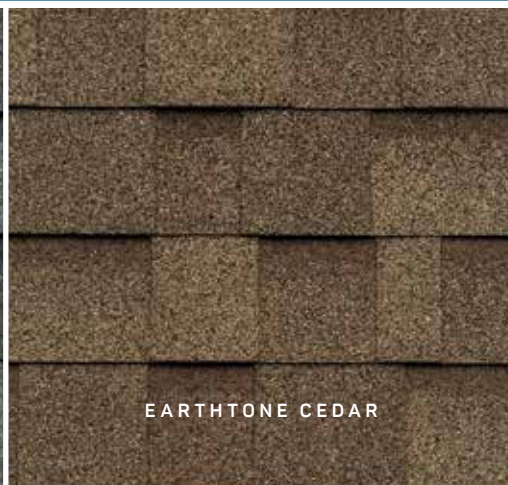

EARTHTONE CEDAR



DRIFTWOOD



DOVE WHITE  
AVAILABLE IN SELECT MARKETS

**IMPORTANT!** To ensure complete satisfaction, please view several full-size shingles and an actual roof installation prior to final color selection as the shingle swatches and photography shown online, in our brochures and in our **ROOFViewer**® tool may not accurately reflect shingle color and do not fully represent the entire color blend range, nor the impact of sunlight.

*Note: Product and color availability may vary by region. Products with Miami Dade NOA, FBC product approval and Texas Department of Insurance listings are available. Please contact IKO for details. <sup>1</sup>See Limited Warranty at IKO.com for complete terms, conditions, restrictions and application requirements. Shingles must be applied in accordance with application instructions and local building code requirements. <sup>2</sup>High-wind application is required. <sup>3</sup>'Lifetime' means the period of time commencing on the date of the completion of the installation of the shingles on the building, and continuing so long as the Owner or the first transferee owns the building on which the shingles were installed. <sup>4</sup>All values shown are approximate. <sup>5</sup>Products are developed with reference to these standards.*

Shingles are your home's first line of defense, but they protect, perform and look their best installed with the **IKO Proformax Integrated Roofing Accessories** shown below.



DECK PROTECTION	SYNTHETIC UNDERLAYMENT	ROOF STARTERS	CAPPING SHINGLES
-----------------	------------------------	---------------	------------------

**1. IKO GoldSeam™ Roof Sealing Tape**

- 1a.** Apply where the fascia and eaves meet.
- 1b.** Apply over seams when sealing the deck using synthetic underlayment.

**StormShield®**

- 1c.** Apply under shingled roofs to help prevent water infiltration due to ice dams and wind-driven rain.

**2. Stormtite™**

It's IKO's economical synthetic underlayment choice. Stronger than conventional felts, Stormtite installs easily, even in cool weather, due to its light weight. Stormtite is the perfect combination of strength and flexibility.

**3. Leading Edge Plus™ or EdgeSeal™**

Apply starter shingles with IKO's own high-strength thermally activated sealant or use the double-sided starter roll at eaves and rakes to help ensure wind resistance at that critical first course of shingles.

**4. Hip & Ridge 12™**

These capping shingles are available in colors that pair with every Cambridge color. Installation is easy, just separate the tapered pieces along the perforation, bend and nail in place. No waste.



To find out more about Cambridge® Architectural shingles or additional IKO products, please talk to an IKO sales representative or a professional roofing contractor, or contact IKO directly.

**United States 1-888-IKO-ROOF (1-888-456-7663)**  
**Canada 1-855-IKO-ROOF (1-855-456-7663)**

The information in this literature is subject to change without notice. We assume no responsibility for errors that may appear in this literature.



Visit us online at: **IKO.COM**