

Wendy Johnson
9.18.18

**NEIGHBORHOOD
AND COMMUNITY
SERVICES
STANDING
COMMITTEE**

MAYOR'S OFFICE COORDINATORS REPORT

OVERALL STATUS (please circle): **APPROVED** **DENIED** **N/A** **CANCELED**

Petition #: 529 Event Name: Client Relation Operations Pep Rally

Event Date: September 27, 2018

Street Closure: None

Organization Name: Quicken Loans, Inc.

Street Address: 1050 Woodward Avenue Detroit, MI 48226

Receipt date of the COMPLETED Special Events Application:	
Date of City Clerk's Departmental Reference Communication:	
Due date for City Departments reports:	
Due date for the Coordinators Report to City Clerk:	

Event Elements (check all that apply):

- | | | | |
|--|--|---|--|
| <input type="checkbox"/> Walkathon | <input type="checkbox"/> Carnival/Circus | <input type="checkbox"/> Concert/Performance | <input type="checkbox"/> Run/Marathon |
| <input type="checkbox"/> Bike Race | <input type="checkbox"/> Religious Ceremony | <input type="checkbox"/> Political Ceremony | <input type="checkbox"/> Festival |
| <input type="checkbox"/> Filming | <input type="checkbox"/> Parade | <input type="checkbox"/> Sports/Recreation | <input type="checkbox"/> Rally/Demonstration |
| <input type="checkbox"/> Fireworks | <input type="checkbox"/> Convention/Conference | <input checked="" type="checkbox"/> Other: <u>Private Corporate Event</u> | |
| <input type="checkbox"/> 24-Hour Liquor License | | | |

Petition Communications (include date/time)

Quicken Loans Appreciation Event for the Client Experience Operations Department located at Comerica Lots 1 & 2 from 5:00pm - 8:00pm.

**** ALL permits and license requirements must be fulfilled for an approval status ****

Date	Department	N/A	APPROVED	DENIED	Additional Comments
	DPD	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Contracted with Olympia Security to Provide Private Security Services
	DFD/EMS	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pending Inspections; Contracted with BLS Services to Provide Private EMS Services
	DPW	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	No Permits Required
	Health Dept.	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	No Permits Required

Date	Department	N/A	APPROVED	DENIED	Additional Comments
	TED	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Fencing Required
	Recreation	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No Jurisdiction
	Bldg & Safety	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Permits Required for Tents, Generators & Stages
	Bus. License	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Liquor License Required
	Mayor's Office	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	All Necessary permits must be obtained prior to event. If permits are not obtained, departments can enforce closure of event.
	Municipal Parking	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No Jurisdiction
	DDOT	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	No Impact on Buses

MAYOR'S OFFICE

Signature: Bethanie Lushier

Date: September 15, 2018

DEPARTMENTAL REFERENCE COMMUNICATION

Monday, September 17, 2018

To: The Department or Commission Listed Below

From: Janice M. Winfrey, Detroit City Clerk

The following petition is herewith referred to you for report and recommendation to the City Council.

In accordance with that body's directive, kindly return the same with your report in duplicate within four (4) weeks.

MAYOR'S OFFICE DPW - CITY ENGINEERING DIVISION
PLANNING AND DEVELOPMENT DEPARTMENT POLICE DEPARTMENT
FIRE DEPARTMENT BUSINESS LICENSE CENTER

529 *Quicken Loans Inc, request to hold "Client Relations Operations Pep Rally" on September 27, 2018 from 5:00 PM to 8:00 PM at Comeica Field Parking lots with set up to begin on 9/25/18 and tear down complete on 9/28/18*

City of Detroit Special Events Application

Successful events are the result of advance planning, effective communication and teamwork. The City of Detroit will be strictly adhering to the Special Events Guidelines; please print them out for reference. Petitioners are required to complete the information below so that the City of Detroit may gain a thorough understanding of the scope and needs of the event. This form must be completed and returned to the Special Events and Film Handling Office at least **60 days** prior to the first date of the event. If submitted later than 60 days prior, application is subject to denial. Please type or print clearly and attach additional sheets and maps as needed.

Section 1- GENERAL EVENT INFORMATION

Event Name: Client Relation Operations Pep Rally

Event Location: Comerica Parking Lots (Lot 1 & Lot 2)

Is this going to be an annual event? Yes No

Section 2- ORGANIZATION/APPLICANT INFORMATION

Organization Name: Quicken Loans INC.

Organization Mailing Address: 1050 Woodward Ave. Detroit MI48226

Business Phone: (313) 373-0093

Business Website: QuickenLoans.com

Applicant Name: Becky Glynn

Business Phone: (313) 373-0093

Cell Phone: (313) 820-5451

Email: BeckyGlynn@QuickenLoans.com

Event On-Site Contact Person:

Name: Becky Glynn

Business Phone: (313) 373-0093

Cell Phone: (313) 820-5451

Email: BeckyGlynn@QuickenLoans.com

Event Elements (check all that apply)

- | | | |
|--|--|---|
| <input type="checkbox"/> Walkathon | <input type="checkbox"/> Carnival/Circus | <input type="checkbox"/> Concert/Performance |
| <input type="checkbox"/> Run/Marathon | <input type="checkbox"/> Bike Race | <input type="checkbox"/> Religious Ceremony |
| <input type="checkbox"/> Political Event | <input type="checkbox"/> Festival | <input type="checkbox"/> Filming |
| <input type="checkbox"/> Parade | <input type="checkbox"/> Sports/Recreation | <input type="checkbox"/> Rally/Demonstration |
| <input type="checkbox"/> Convention/Conference | <input type="checkbox"/> Fireworks | <input checked="" type="checkbox"/> Other: <u>Private Corporate Event</u> |

Please provide a brief description of your event:

This will be an appreciation event for our Client Experience Operations department of the company. This is a private event for this area of the business. Food, Alcohol, and non-alcoholic beverages will be served through Olympia Catering. There will be large tents on site (two (2) 60x210 & one (1) 60x90) provided by Wahl Tents. American Rental will be providing five (5) 20x20 tents for the catering staff.

What are the projected set-up, event and tear down dates and times (must be completed)?

Begin Set-up Date : 9/25/18 Time: 8:00am Complete Set-up Date: 9/26/18 Time: 6:00pm

Event Start Date: 9/27/18 Time: 5:00pm Event End Date: 9/27/18 Time: 8:00pm

Begin Tearing Down Date: 9/27/18 Complete Tear Down Date: 9/28/18

Event Times (If more than one day, give times for each day):
9/27/18 from 8:00pm – 11:00pm & 9/28 from 8:00am – 6:00pm

Section 3- LOCATION/SITE INFORMATION

Location of Event: Comerica Lots 1 & 2

Facilities to be used (circle): Street Sidewalk Park City
Facility

Please attach a copy of Port-a-John, Sanitation, and Emergency Medical Agreements as well as a site plan which illustrates the anticipated layout of your event including the following:

- Public entrance and exit
- Location of merchandising booths
- Location of food booths
- Location of garbage receptacles
- Location of beverage booths
- Location of sound stages
- Location of hand-washing sinks
- Location of portable restrooms
- Location of First Aid
- Location of fire lane
- Proposed route for walk/run.
- Location of tents and canopies.
- Sketch of street closure
- Location of bleachers
- Location of press area
- Sketch of proposed light pole banners

Section 4- ENTERTAINMENT

Describe the entertainment for this year's event:

DJ, Drumline, Cheerleaders, inflatable slide, (2) inflatable tugga touchdown, inflatable field goal game, Cornhole, and coloring wall

Will a sound system be used? Yes No

If yes, what type of sound system? External sound system

Describe specific power needs for entertainment and/or music:

Speaker system for DJ, microphone; and 8 TV monitors

How many generators will be used? 1 unit

How will the generators be fueled? Electric powered/85 kVA Generator

Name of vendor providing generators:

Premier Event Technology

Contact Person: Adam Martin

Address: 15630 Michigan Ave

Phone: (248) 230-2640

City/State/Zip Dearborn, MI 48126

Section 5- SALES INFORMATION

Will there be advanced ticket sales? Yes No

If yes, please describe:

Will there be on-site ticket sales? Yes No

If yes, list price(s):

Will there be vending or sales? Yes No

If yes, check all that apply:

Food Merchandise Non-Alcoholic Beverages Alcoholic Beverages

Indicate type of items to be sold:

Section 6- PUBLIC SAFETY & PARKING INFORMATION

Name of Private Security Company: Olympia Entertainment Inc. Security

Contact Person: Johnny Jackson

2525 Woodward Ave

Phone: (313) 471-7430

City/State/Zip: Detroit, MI 48226

Number of Private Security Personnel Hired Per Shift: 35

Are the private security personnel (check all that apply):

Licensed Armed Bonded

How will you advise attendees of parking options?

 No onsite parking required, attendees will be parking in their assigned company parking spots.

Section 7- COMMUNICATION & COMMUNITY IMPACT INFORMATION

How will your event impact the surrounding community (i.e. pedestrian traffic, sound carryover, safety)?

No pedestrian access on the road between Lot 1 & Lot 2 (see diagram) between Woodward Ave through and Witherell Street

Have local neighborhood groups/businesses approved your event? Yes per Olympia Entertainment

Indicate what steps you have or will take to notify them of your event: Olympia Entertainment will be

contacting the local community

Section 8- EVENT SET-UP

Complete the appropriate categories that apply to the event Structure

	How Many?	Size/Height
Booth		
Tents (enclosed on 3 sides)	_____	(5) 20 x 20
Canopy (open on all sides)	3	(2) 60 x 210 & (1) 60 x 90
Staging/Scaffolding	3	Stage 1 = (1) 32'l x 8'd x 4'h Stage 2 = (1) 12'l x 12'd x 1.5' h Stage 3 = (1) 8' l x 8'h x 1'h
Bleachers	9	14 x 8

Section 9- COMPLETE ALL THAT APPLY

Emergency medical services? BLS Services

Contact Person: Candice Weaver

Address: 2525 Woodward Ave

City/State/Zip: Detroit, MI 48226

Name of company providing port-a-johns. American Rentals, INC.

Contact Person: Tom Mollitor

Address: 4901 W. Grand River Ave

Phone: (517) 204- 0666

City/State/Zip: Lansing, MI 48906

Name of private catering company? Olympia Catering

Contact Person: Jennifer Tompos

Address: 2211 Woodward Ave

Phone: (313) 471-3218

City/State/Zip: Detroit, MI 48226

SPECIAL USE REQUESTS

List any streets or possible streets you are requesting to be closed. Include the day, date, and time of requested closing and reopening. Neighborhood Signatures must be submitted with application for approval. Barricades are not available from the City of Detroit.

Attach a map or sketch of the proposed area for closure.

STREET NAME: _____

FROM: _____ **TO:** _____

CLOSURE DATES: _____ **BEG TIME:** _____ **END TIME:** _____

REOPEN DATE: _____ **TIME:** _____

STREET NAME: _____

FROM: _____ **TO:** _____

CLOSURE DATES: _____ **BEG TIME:** _____ **END TIME:** _____

REOPEN DATE: _____ **TIME:** _____

STREET NAME: _____

FROM: _____ **TO:** _____

CLOSURE DATES: _____ **BEG TIME:** _____ **END TIME:** _____

REOPEN DATE: _____ **TIME:** _____

STREET NAME: _____

FROM: _____ **TO:** _____

CLOSURE DATES: _____ **BEG TIME:** _____ **END TIME:** _____

REOPEN DATE: _____ **TIME:** _____

STREET NAME: _____

FROM: _____ **TO:** _____

CLOSURE DATES: _____ BEG TIME: _____ END TIME: _____

REOPEN DATE: _____ TIME: _____


PLEASE ADD IMPORTANT INFORMATION BELOW AND ATTACH A COPY OF THE FOLLOWING:

- 1) CERTIFICATE OF INSURANCE
- 2) EMERGENCY MEDICAL AGREEMENT
- 3) SANITATION AGREEMENT
- 4) PORT-A-JOHN AGREEMENT
- 5) COMMUNITY COMMUNICATION

This is a private event on Olympia Entertainment property. They will be provide their standard event operation standards i.e. providing emergency medical personal and sanitation plan from set up to load out.

AUTHORIZATION & AFFADAVIT OF APPLICANT

I certify that the information contained in the foregoing application is true and correct to the best of my knowledge and belief that I have read, understood and agreed to abide by the rules and regulations governing the proposed Special Event, and I understand that this application is made subject to the rules and regulations established by the Mayor or the Mayor's designee. Applicant agrees to comply with all other requirements of the City, County, State, and Federal Government and any other applicable entity, which may pertain to Special Events. I further agree to abide by these rules, and further certify that I, on behalf of the Event agree to be financially responsible for any costs and fees that may be incurred by or on behalf of the Event, to the City of Detroit.

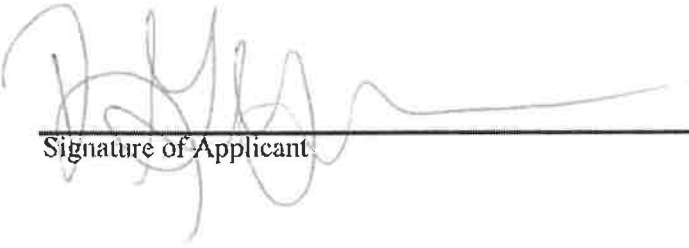 _____
Signature of Applicant


9/14/18
_____ Date

NOTE: Completion of this form does not constitute approval of your event. Pending review by the Special Events Management Team, you will be notified of any requirements, fees, and/or restrictions pertaining to your event.

HOLD HARMLESS AND INDEMNIFICATION


The Applicant agrees to indemnify and hold the City of Detroit (which includes its agencies, officers, elected officials, appointed officials and employees) harmless from and against injury, loss, damage or liability (or any claims in respect of the foregoing including claims for personal injury and death, damage to property, and reasonable outside attorney's fees) arising from activities associated with this permit, except to the extent attributable to the gross negligence or intentional act or omission of the City.

Applicant affirms that Applicant has read and understands the Hold Harmless and Indemnification provision and agrees to the terms expressed therein.

(Please Print)  _____

Event Name: Pep Rally Event Date: 9/27/18

Event Organizer: Quicken Loans (Becky Gynn)

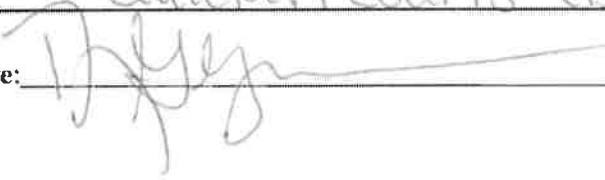Applicant Signature:  _____ Date: 9/14/18



STATE OF MICHIGAN - LIQUOR CONTROL COMMISSION

This is to certify that a License is hereby granted to the person(s) named with the stipulation that the licensee is in compliance with Commission Rule R 436.1003, which states that a licensee shall comply with all state and local building, plumbing, zoning sanitation, and health laws, rules, and ordinances as determined by the state and local law enforcement officials who have jurisdiction over the licensee. Issuance of this license by the Michigan Liquor Control Commission does not waive this requirement. The licensee must obtain all other required state and local licenses, permits, and approvals for this business before using this license for the sale of alcoholic liquor on the licensed premises.

This License is granted in accordance with the provisions of Act 58 of the Public Acts of 1998 and shall continue in force for the period designated unless suspended, revoked, or declared null and void by the Michigan Liquor Control Commission. Failure to comply with all laws and rules may result in the revocation of this license.

Department of Licensing and Regulatory Affairs

BUSINESS ID: 4489
OLYMPIA ENTERTAINMENT, INC.
D/B/A FOX THEATRE

THIS LICENSE SUPERSEDES ANY AND ALL OTHER LICENSES ISSUED PRIOR TO APRIL 27, 2018
FILE NUMBER: D59672

IN WITNESS WHEREOF,

this License has been duly signed and sealed by both the Michigan Liquor Control Commission and the Licensee(s).

2211 WOODWARD AVE,
DETROIT, MI 48201-3467

WAYNE COUNTY
D-236
DETROIT CITY

LIQUOR CONTROL COMMISSION

[Signature]

LICENSE # 11097
Specialty Designated Merchant

ACT:

6894 Class C

TOTAL BARS: 21

OUTDOOR SERVICE AREA:

ROOMS:

DIRECT-CONNECTIONS: 15

PASSENGERS:

LICENSEE(S) SIGNATURE(S)

PERMIT
Sunday Sales (PM), Dance-Entertainment, Specific Purpose(Special Events) (Sunday-Sunday Hours: 9:00 AM-12:00 PM), Specific Purpose (Other, Conventions) (Sunday-Sunday Hours: 9:00 AM-12:00 PM), Sunday Sales (AM), Catering, Direct Connection(15), Additional Bar(20)

[Signature]

2018

LICENSE EFFECTIVE MAY 1, 2018 - EXPIRES APRIL 30, 2019

2019

①

Quicken Loans Client Relations Operations Pep Rally – Thursday September 27, 2018

Contents for Special Events Application

1. Copy of State of Michigan Liquor License for Olympia Entertainment, Inc.
 - a. Attached. Page 1
2. WhisperWatt Generator
 - a. Attached. Page 2-5
3. American Rental – Portable Toilets
 - a. Attached. Page 6
4. Tent information for five(5) 20X20 tents
 - a. Attached. Page 7-12
5. Event Layout w/key
 - a. Attached. Page 13
6. StageRight
 - a. Structural info for all staging. Attached Page 14-19
7. Wahl Tent info for Two 60X120 & One(1) 60X90
 - a. Attached. Page 20-88
8. Temporary Tent Restraint Requirements
 - a. Will send 9/17
9. Copy of License Agreement between Quicken Loans & Olympia
 - a. Will send 9/17
10. Copy of COI by QL for City of Detroit
 - a. Will send by 9/17




DCA85USJ

MQ POWER WhisperWatt™ Series Generator

Prime Rating — 68 kW (85 kVA)

Standby Rating — 75 kW (94 kVA)

Three-Phase, 60 Hertz, 0.8 PF

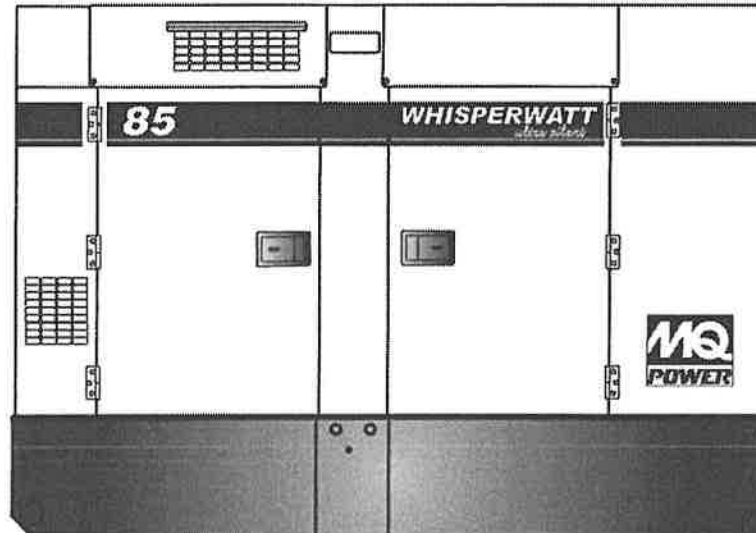

STANDARD FEATURES

- Heavy duty, 4-cycle, direct injection, turbocharged diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements and meets temperature rise standards for Class F insulation systems.
- Open delta excitation design provides virtually unlimited excitation for maximum motor starting capability.
- Automatic voltage regulator (AVR) provides precise regulation.
- Electronic Governor Control (Crystal Sync) — maintains frequency to within $\pm 0.25\%$ from no load to full load.
- Full load acceptance of standby nameplate rating in one step (NFPA 110, para 5-13.2.6).
- Sound attenuated, weather resistant, steel housing provides operation at 63 dB(A) at 23 feet. Fully lockable enclosure allows safe unattended operation.
- Internal fuel tank with direct reading of fuel gauge.
- Seven stage powder coat paint system provides durability and weather protection.
- Fuel/water separator removes condensation from fuel for extended engine life. Panel mounted alarm light included.
- Complete engine analog instrumentation includes DC ammeter, oil pressure gauge, water temp. gauge, fuel level gauge, tachometer/hour meter, preheat indicator, and emergency shutdown monitors.
- Complete generator analog instrumentation includes voltage regulator control, ammeter phase selector switch, voltmeter phase selector switch, AC voltmeter, AC ammeter, frequency meter, panel light, and circuit breaker.
- Automatic safety shutdown system monitors the engine oil pressure and coolant temperature. Warning lights indicate abnormal conditions.
- Automatic start/stop control — automatically starts the generator set during a commercial power failure when used in conjunction with a transfer switch.
- Complete power panel. Fully covered; three-phase terminals and single phase receptacles allow fast and convenient hookup for most applications including temporary power boxes, tools and lighting equipment. The GFCI receptacles are NEMA 5-20, and the auxiliary outputs use CS6369 twist-lock receptacles.
- Simultaneous single and three phase power.
- Voltage selector switch offers the operator a wide range of voltages that are manually selectable. Fine tuning of the output voltage can be accomplished by adjusting the voltage regulator control knob to obtain the desired voltage.
- EPA emissions certified - Tier 3 emissions compliant.



DCA85USJ

MQ POWER WhisperWatt™ Series Generator

SPECIFICATIONS

Generator Specifications		
Design	Revolving field, self-ventilated Drip-proof, single bearing	
Armature Connection	Star with Neutral	Zig Zag
Phase	3	Single
Standby Output	75 KW (94 KVA)	66 KW
Prime Output	68 KW (85 KVA)	60 KW
3Ø Voltage (L-L/L-N) Voltage Selector Switch at 3Ø 240/139	208Y/120, 220Y/127, 240Y/139	N/A
3Ø Voltage (L-L/L-N) Voltage Selector Switch at 3Ø 480/277	416Y/240, 440Y/254, 480Y/277	N/A
1Ø Voltage (L-L/L-N) (Voltage Selector Switch at 1Ø 240/120)	N/A	240/120
Power Factor	0.8	1.0
Voltage Regulation (No load to full load)	±0.5%	
Generator RPM	1800	
Frequency	60 Hz	
No. of Poles	4	
Excitation	Brushless with AVR	
Frequency	60 Hz	
Frequency Regulation: No Load to Full Load	3-5% under varying loads from no load to 100% rated load	
Frequency Regulation: Steady State	±0.5% of mean value for constant loads from no load to full load.	
Insulation	Class F	
Sound Level dB(A) Full load at 23 feet	63	

Engine Specifications	
Make / Model	John Deere / 4045HF285
Emissions	EPA Tier 3 Certified
Starting System	Electric
Design	4-cycle, water cooled, direct injection turbocharged
Displacement	274.6 in ³ (4500 cc)
No. cylinders	4
Bore x Stroke (mm)	106 x 127
Gross Engine Power Output	113.0 bhp (84.3 kWm)
BMEP	162 psi (1119 kPa)
Piston Speed	1500 ft./min. (7.82 m/s)
Compression Ratio	17:1
Engine Speed	1800 rpm
Overspeed Limit	2100 rpm
Oil Capacity	3.49 gallons (13.2 liters)
Battery	12V 72Ah x 1

Fuel System		
Recommended Fuel	ASTM-D975-No.1 & No.2-D	
Maximum Fuel Flow (per hour)	15.9 gallons (60 liters)	
Maximum Inlet Restriction (Hg)	5.9 in. (150 mm)	
Fuel Tank Capacity	126 gallons (150 liters)	
Fuel Consumption	gph	lph
At full load	5.3	20.1
At 3/4 load	4.3	16.2
At 1/2 load	3.1	11.9
At 1/4 load	2.0	7.6

Cooling System	
Fan Load	1.6 hp (1.2 kW)
Coolant Capacity (with radiator)	3.70 gallons (14.0 liters)
Coolant Flow Rate (per minute)	38 gallons (144 liters)
Heat Rejection to Coolant (per minute)	3300 Btu (3.5 MJ)
Heat Rejection to Room (per minute)	582 Btu (0.614 MJ)
Maximum Coolant Friction Head	4.0 psi (27.6 kPa)
Maximum Coolant Static Head	32 feet (9.8 meters)
Ambient Temperature Rating	104°F (40°C)

Air	
Combustion Air	226 cfm (6.4 m ³ /min)
Maximum Air Cleaner Restriction	25 in. H ₂ O (6.25 kPa)
Alternator Cooling Air	911 cfm (45 m ³ /min)
Radiator Cooling Air	1589 cfm (30 m ³ /min)
Minimum Air Opening to Room	7.85 sq. ft. (0.73 sq. m)
Minimum Discharge Opening	3.87 sq. ft. (0.36 sq. m)

Exhaust System	
Gas Flow (full load)	674 cfm (19.1 m ³ /min)
Gas Temperature	1094°F (590°C)
Maximum Back Pressure	30.0 in. H ₂ O (7.5 kPa)

Amperage	
Rated Voltage	Maximum Amps
1Ø 120 Volt	188.9Amps (4 wire) 250A x 2 (Zigzag)
1Ø 240 Volt	94.4Amps (4 wire) 250A (Zigzag)
3Ø 240 Volt	204 Amps
3Ø 480 Volt	102 Amps
Main Line Circuit Breaker Rating	250 Amps
Over Current Relay Trip Set Point 480V Mode Only	102 Amps

WARRANTY*

John Deere

12 months from date of purchase with unlimited hours or 24 months from date of purchase with 2000 hours (whichever comes first).

Generator

24 months from date of purchase or 2000 hours (whichever occurs first).

Trailer

12 months excluding normal wear items.

*Refer to the express written, one-year limited warranty sheet for additional information

NOTICE

Generator is not intended for use in enclosed areas or where free flow of air is restricted.

Backfeed to a utility system can cause electrocution, shock and/or property damage. **DO NOT** connect to any building's electrical system except through an approved device.

Specifications are subject to change without notice.



DCA85USJ

MQ POWER WhisperWatt™ Series Generator


MQ POWER DECIBEL LEVELS

Our soundproof housing allows substantially lower operating noise levels than competitive designs. WhisperWatts are at home on construction sites, in residential neighborhoods, and at hospitals — just about anywhere.


- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
- 63.0 — WhisperWatt at 23 feet
- 60 — Air conditioner at 20 feet
- 50 — Normal conversation

ULTRA-SILENT FEATURES

- **Low Noise Muffler** — Large capacity low noise muffler minimizes exhaust sound.
- **Soundproof Casing** — The new design divides the cabinet into three sections, separating the engine, muffler and radiator for more efficient cooling and reduces noise from the engine and fans.
- **New Cooling System** — An advanced design uses two separate air intake systems to cool the generator. The engine fan draws air in to cool the engine and generator housing while a second electric fan directly cools the radiator. With less air being drawn into the generator through each fan, considerably less noise is produced through the top of the generator.
- **Environmental Design** — Constructed using an integrated environmental skid and fuel tank. This design fully contains fuel leakage and any liquid that might leak from the engine such as lube oil or radiator coolant. All potentially hazardous liquids are contained without contaminating the surrounding area.

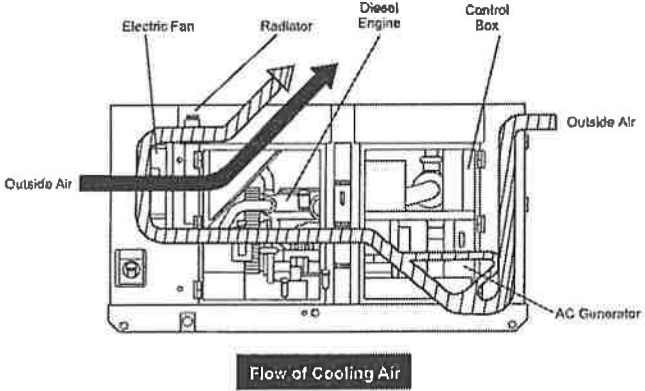

GENERATOR OUTPUT PANEL

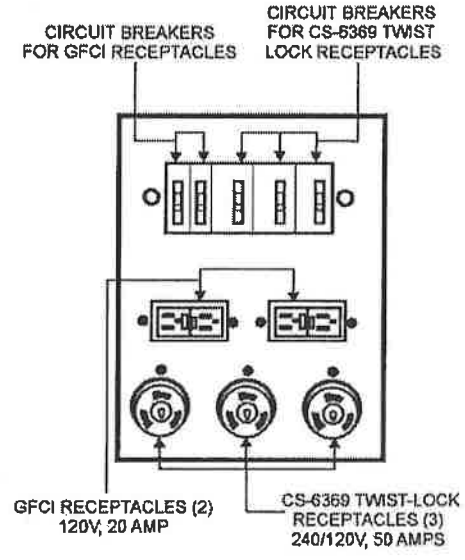

OPTIONAL CONTROL FEATURES

- **Emergency Stop Switch** — when manually activated shuts down generator in the event of an emergency.
- **Audible alarm** — alerts operator of abnormal conditions.

OPTIONAL GENERATOR FEATURES

- **Electronic Governor Control (Crystal Sync)** — maintains frequency to within $\pm 0.25\%$ from no load to full load.
- **Battery Charger** — provides fully automatic and self-adjusting charging to the generator's battery system.
- **Jacket Water Heater** — for easy starting in cold weather climates.
- **Special Batteries** — long life batteries provide extra engine cranking power.
- **Spring Isolators** — provides extra vibration protection for standby applications.
- **Low Coolant Level Shutdown** — provides protection from critically low coolant levels. Includes control panel warning light.
- **Trailer Mounted Package** — meets National Highway Traffic Safety Administration (NHTSA) regulations. Trailer is equipped with electric or surge-hydraulic brakes with tandem axle configuration.

OPTIONAL OUTPUT CONNECTIONS

- **Cam-Lock Connectors** — provides quick disconnect alternative to bolt-on connectors.
- **Pin and Sleeve Connectors** — provides industry standard connectors for all voltage requirements.
- **Output Cable** — available in any custom length and size configuration.




4



DCA85USJ

MQ POWER WhisperWatt™ Series Generator

DIMENSIONS

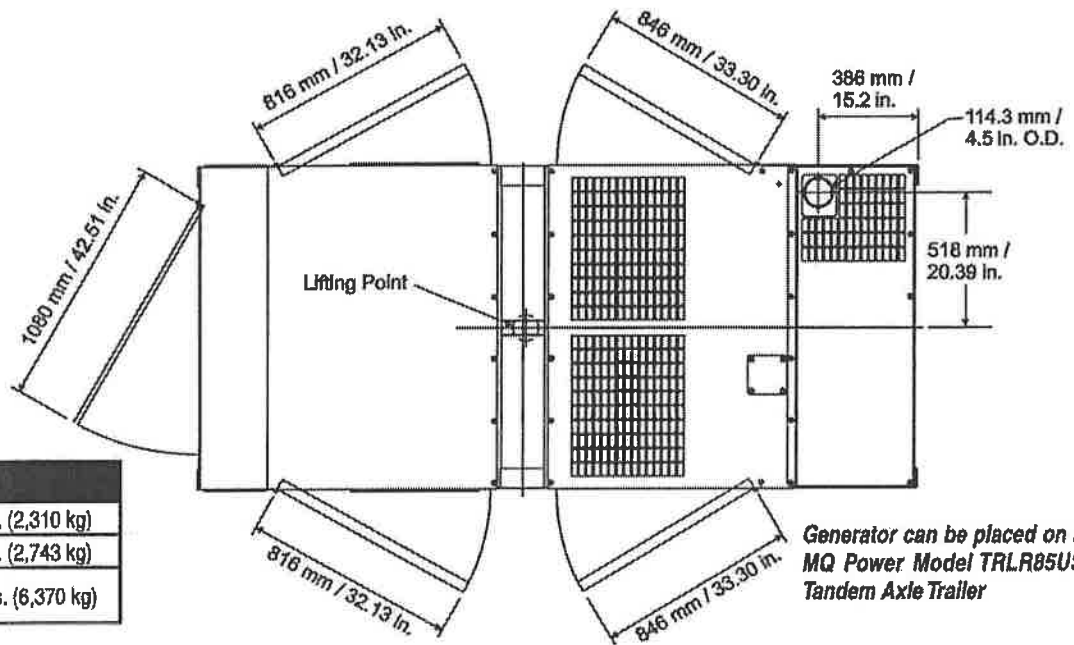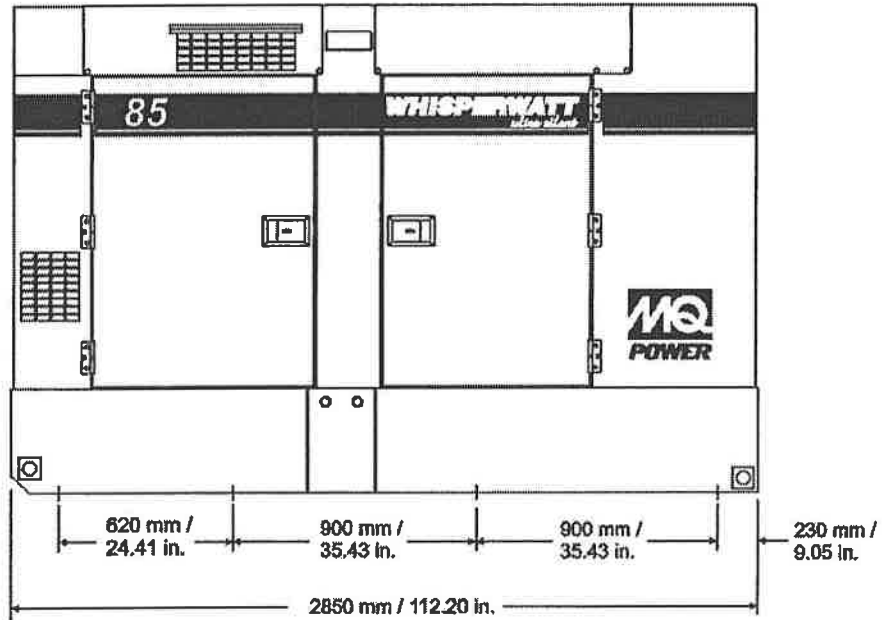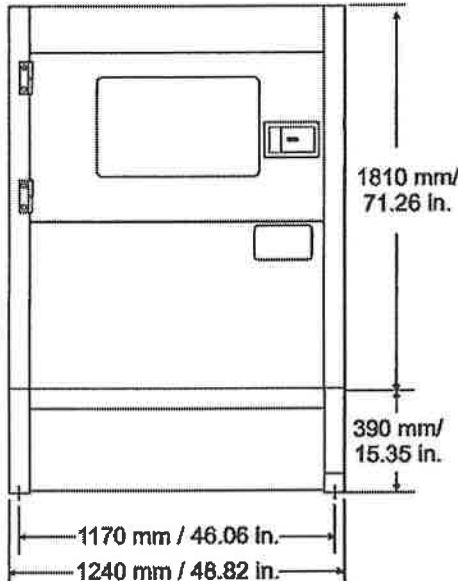

Generator can be placed on a
MQ Power Model TRLR85US
Tandem Axle Trailer

Weight	
Dry Weight	5,094 lbs. (2,310 kg)
Wet Weight	6,048 lbs. (2,743 kg)
Max. Lifting Point Capacity	14,050 lbs. (6,370 kg)

Manufactured by Denyo Co.

Your Multiquip dealer is:

© COPYRIGHT 2015 MULTIQIP INC.
DCA85USJ2 Rev. #11 (01/14/15)



MULTIQIP
POST OFFICE BOX 6254
CARSON, CA 90749
310-537-3700 • 800-883-2551
FAX: 310-604-3831
E-MAIL: sales@multiquip.com
WEBSITE: www.multiquip.com



MAIN OFFICE
 4901 W. Grand River • Lansing, MI 48906
 517-321-1110 • 800-637-1110 • FAX 517-323-7446

TRAVERSE CITY OFFICE
 6546 M-37 • Kingsley, MI 49649
 231-263-1777 • 800-858-7533 • FAX 231-263-1083

Portable Chemical Toilets
 Royal Flush Toilet Trailers
 Staging & Dance Floors
 Tents & Canopies
 China & Flatware
 Paper Products
 Tables & Chairs
 Linens

CONTRACT / INVOICE # 555229

CUSTOMER # 30000

DATE 09/13/2018

QUICKEN LOANS
 ATTN MEGAN NISSEN
 1050 WOODWARD AVE
 DETROIT, MI 48226

DELIVER TO:
 COMMERICA PARK LOTS 1&2
 WEST OF TIGER WHERE WE DID
 WINTER CLASSIC

Cust PO#
 Delivery Date: 9/25/18 TUE
 Pick-up Date: 9/28/18 FRI

Billing: **OneTime**
 Start Date: 9/27/2018
 End Date: 9/27/2018

Surface
 N/A

CALL BEFORE DELIVERY LAN TM
 MEGAN NISSEN
 313-580-4541

QUANTITY	DESCRIPTION	PRICE	TOTAL
2	14' ROYAL FLUSH	1,500.00 EA	3,000.00
1	18' ROYAL FLUSH	2,500.00 EA	2,500.00
5	HANDI-CAP PORTABLE TOILET	200.00 EA	1,000.00
10	AMERI-CAN PORTABLE TOILET	100.00 EA	1,000.00
		Mileage charge:	500.00
		Damage waiver:	450.00
		TOTAL:	8,450.00

(6)

PLEASE MAKE CHECKS PAYABLE TO AMERICAN RENTALS, INC.
 RATES DO NOT INCLUDE SETUP AND TAKE DOWN (EXCEPT TENTS)
 DELIVERY MEANS DOCK DELIVERY & PICKUP
 I HAVE READ AND UNDERSTAND THE CONDITIONS OF RENTAL LISTED ON
 REVERSE SIDE.

X _____
 LESSEE SIGNATURE

Printed on: 9/13/2018 10:27



Certificate of Flame Resistance

Date manufactured

04/05/11

REGISTERED FABRIC NUMBER

140.03

ISSUED BY

SNYDER MANUFACTURING, INC.
3001 PROGRESS STREET
DOVER, OHIO 44622

This is to certify that the materials described below are flame-retardant and inherently nonflammable.

FOR DEAL RITE ADDRESS 9735 SOUTH 20TH

CITY OAK CREEK STATE MI ZIP 48154

The articles described below are made from a flame-resistant fabric or material registered and approved by the State Fire Marshal for such use.

The Flame Retardant Process Used WILL NOT Be Removed By Washing

* FABRIC MEETS THE REQUIREMENTS OF THE SPECIFICATIONS LISTED BELOW INDICATED BY

NFPA-701-2004 (Large Scale) MIL-C-43006 FMVSS-302

CAN/ULC-S109-2003 CPAI-84 A-A-55308

SNYDER MANUFACTURING INC. BY *[Signature]* Title _____ Supervisor Quality Control

STYLE FRCS 899K FLAME RET. RED 611

CONTROL NO. 71114 CUSTOMER ORDER NO. MICHELE

SNYDER S-ORDER NO. 225261 DATE PROCESSED 04/05/11

YARDS OR QUANTITY 300 DATE CERTIFIED 02/02/12

L

Certificate of Flame Resistance

REGISTERED
FABRIC
NUMBER

F-140.01

ISSUED BY
JOHNSON OUTDOORS INC.
BINGHAMTON, NEW YORK 13902
*Manufacturers of the Finest
Tent Products Described Herein*

Date of Manufacture

MAY 2007

This is to certify that the products herein have been manufactured from material inherently flame retardant as here after specified by the material supplier.

NAME MILLER'S AMERICAN RENTALS

CITY: LANSING, MI

Certification is hereby made that:

The articles described on this certificate have been manufactured with an approved flame retardant chemical in compliance with California State Fire Marshal Code, NFPA-701*, Underwriters Laboratory of Canada, and have been tested in accordance with the Federal Test Method Specifications and meet or exceed the Military Flame Specifications of MIL-C-43006G.

Type, color and weight of material: 14 OZ


VINYL WHITE BLOCK OUT

Description of item certified: EFS 20X20 2PC

**Flame Retardant Process Used Will Not Be Removed By Washing And
Is Effective For T**

Snyder Manufacturing, Inc.

Manufacturer of Flame Retardant Vinyl Laminates


TENT DEPARTMENT, JOHNSON OUTDOORS INC.

*Large Scale

Certificate of Flame Resistance

REGISTERED
FABRIC
NUMBER

F-140.01

ISSUED BY
JOHNSON OUTDOORS INC.
BINGHAMTON, NEW YORK 13902
*Manufacturers of the Finest
Tent Products Described Herein*

Date of Manufacture

MAY 2007

This is to certify that the products herein have been manufactured from material inherently flame retardant as here after specified by the material supplier.

NAME MILLER'S AMERICAN RENTALS

CITY: LANSING, MI

Certification is hereby made that:

The articles described on this certificate have been manufactured with an approved flame retardant chemical in compliance with California State Fire Marshal Code, NFPA-701*, Underwriters Laboratory of Canada, and have been tested in accordance with the Federal Test Method Specifications and meet or exceed the Military Flame Specifications of MIL-C-43006G.

Type, color and weight of material: 14 OZ

VINYL WHITE BLOCK OUT

Description of item certified: EFS 10 MID 20

**Flame Retardant Process Used Will Not Be Removed By Washing And
Is Effective For T**

Snyder Manufacturing, Inc.

Manufacturer of Flame Retardant Vinyl Laminates


TENT DEPARTMENT, JOHNSON OUTDOORS INC.

*Large Scale

Certificate of Flame Resistance

REGISTERED
FABRIC
NUMBER

F-140.01

ISSUED BY
JOHNSON OUTDOORS INC.
BINGHAMTON, NEW YORK 13902
*Manufacturers of the Finest
Tent Products Described Herein*

Date of Manufacture

MAY 2007

This is to certify that the products herein have been manufactured from material inherently flame retardant as here after specified by the material supplier.

NAME MILLER'S AMERICAN RENTALS

CITY: LANSING, MI

Certification is hereby made that:

The articles described on this certificate have been manufactured with an approved flame retardant chemical in compliance with California State Fire Marshal Code, NFPA-701*, Underwriters Laboratory of Canada, and have been tested in accordance with the Federal Test Method Specifications and meet or exceed the Military Flame Specifications of MIL-C-43006G.

Type, color and weight of material: 14 OZ

VINYL WHITE BLOCK OUT

Description of item certified: EFS 20 MID 20

**Flame Retardant Process Used Will Not Be Removed By Washing And
Is Effective For T**

Snyder Manufacturing, Inc.

Manufacturer of Flame Retardant Vinyl Laminates



TENT DEPARTMENT, JOHNSON OUTDOORS INC.

*Large Scale




TWIN TUBE

20' x 20' Optimal

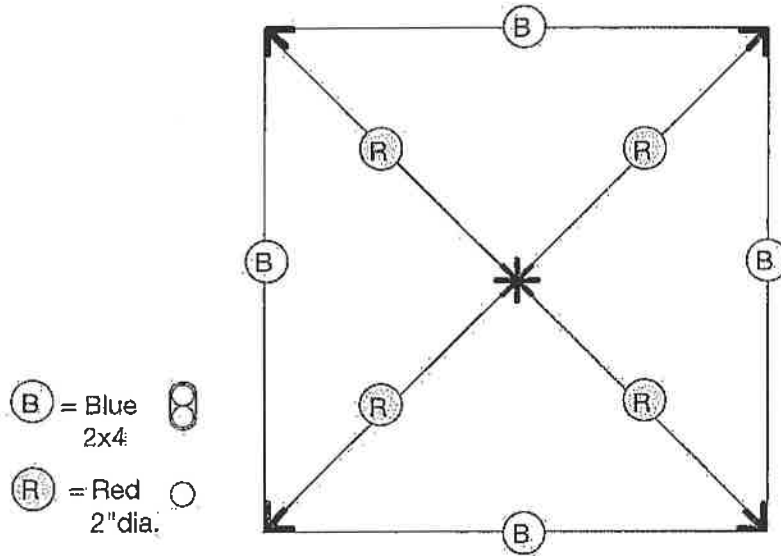


Note: Additional stakes will be necessary in soft soil conditions or whenever stakes pull up from the ground.

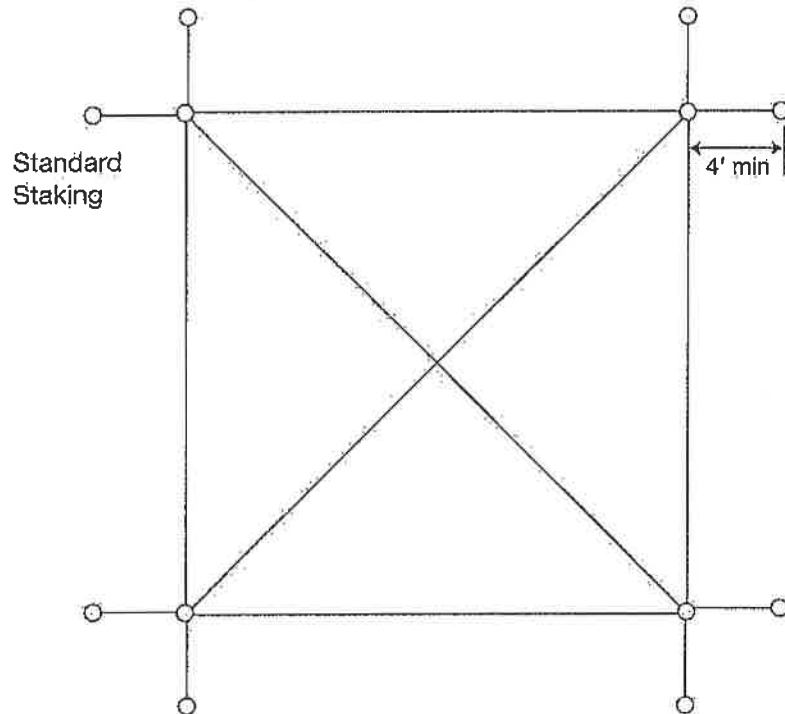


TWIN TUBE



20' Wide Optimal

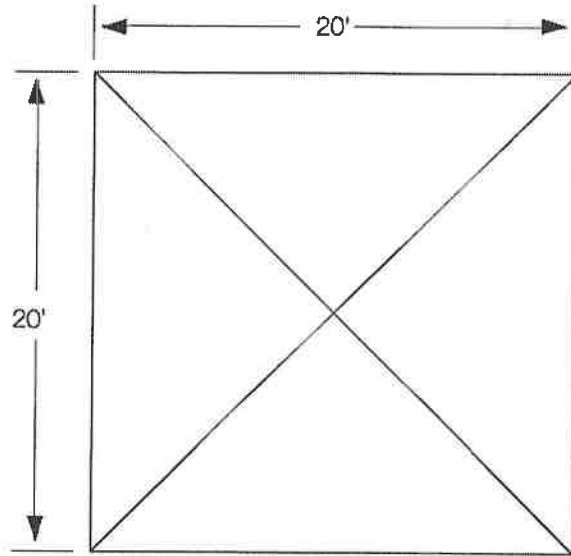

PLAN

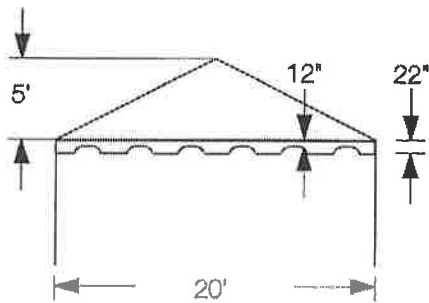

FRONT

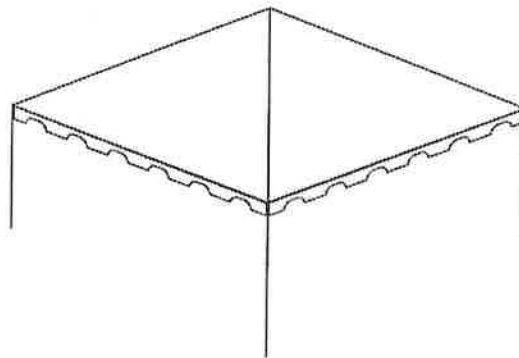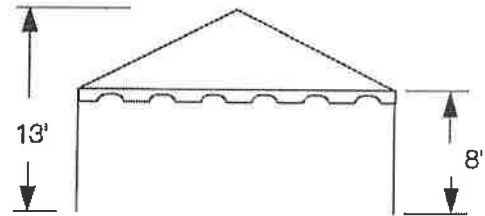


Eureka!
Above all, we make it special.

www.eurekatents.com

fax: 607.779.2291
REV.D 4.08

12

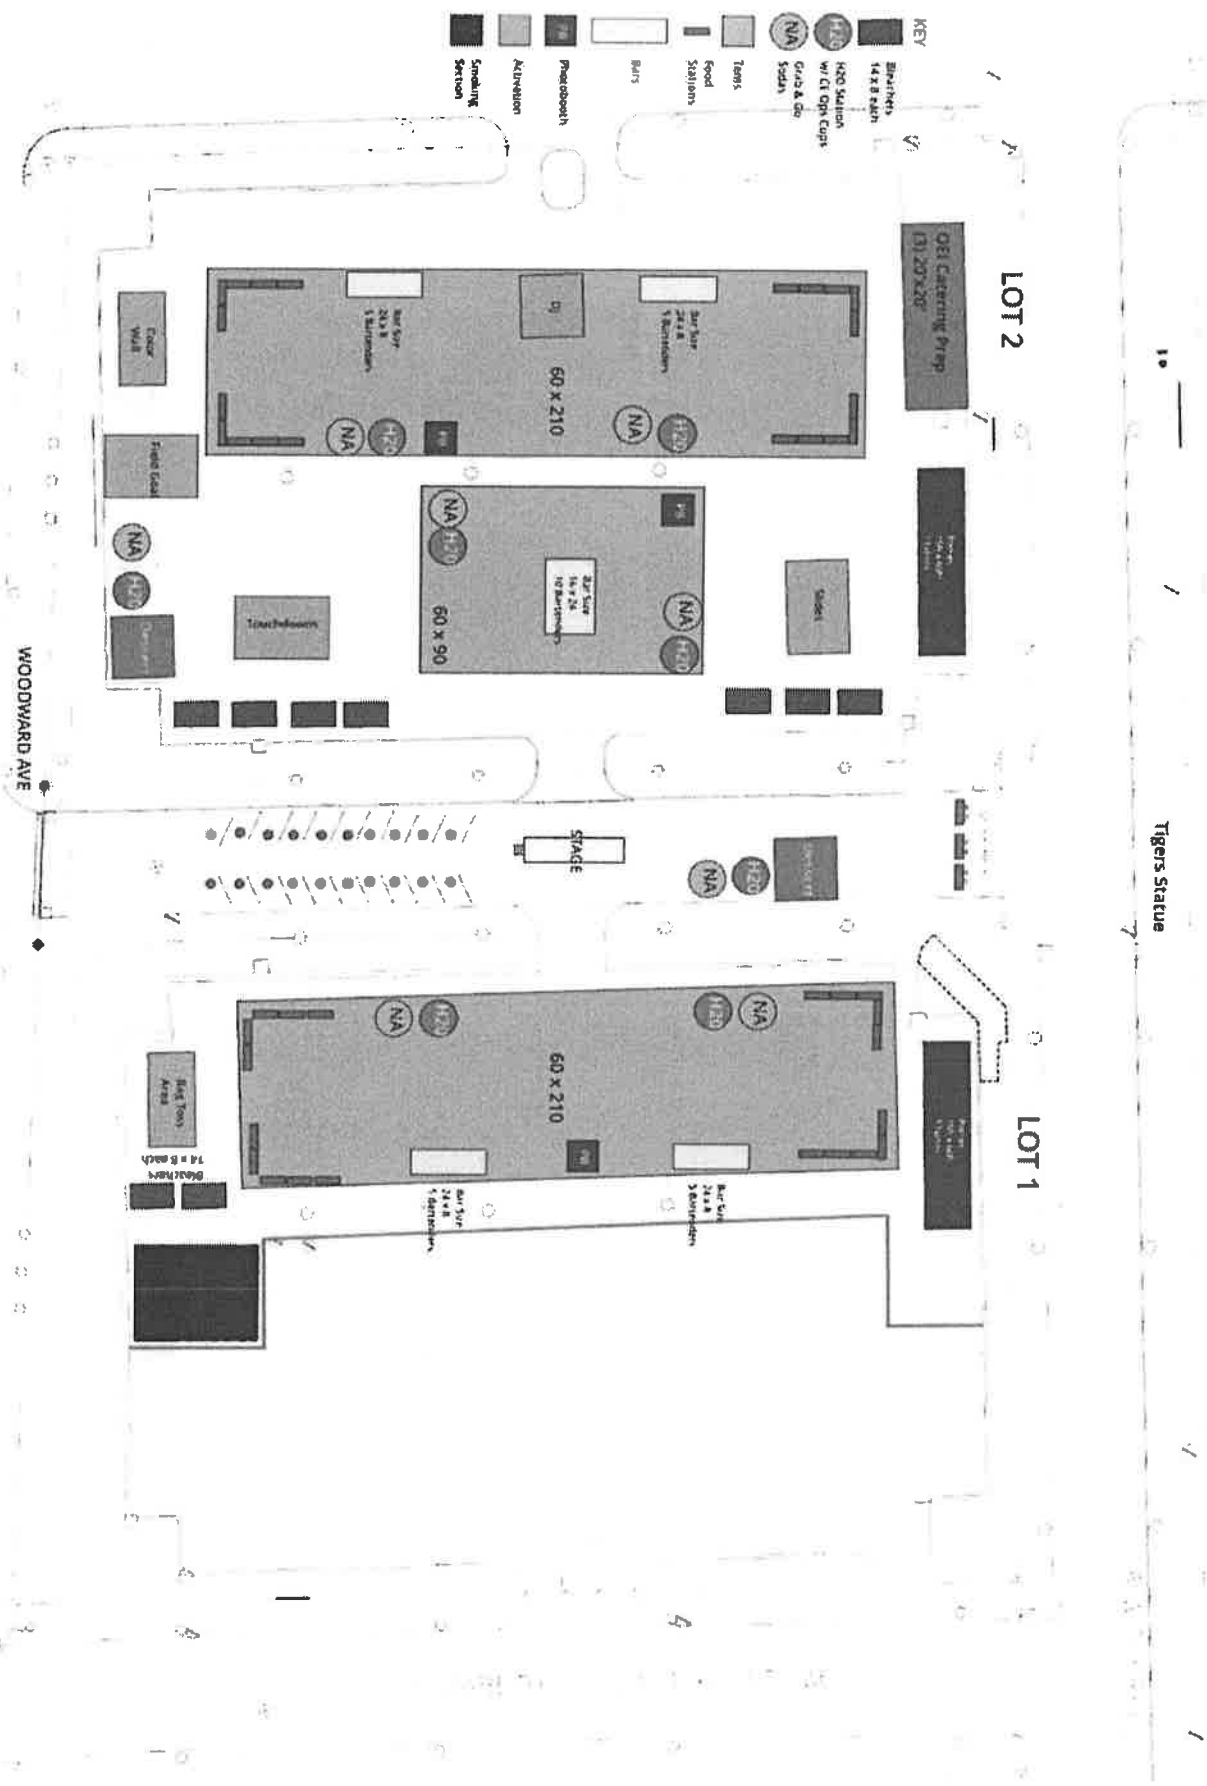

StageRight
495 Pioneer Parkway
Clare, Michigan 48617
Toll Free 800-438-4499
Website www.stageright.com
E-mail stageright@rogersgrp.com

August 2014

Product Guide Specification

Specifier Notes: This product guide specification is written according to the Construction Specifications Institute (CSI) 3-Part Format, including *MasterFormat*, *SectionFormat*, and *PageFormat*, as described in *The CSI Construction Specifications Practice Guide*.

This section must be carefully reviewed and edited by the Architect to meet the requirements of the project and local building code. Coordinate this section with other specification sections and the Drawings. Delete all "Specifier Notes" after editing this section.

Section numbers and titles are from *MasterFormat 2014 Update*.

SECTION 11 61 23

FOLDING AND PORTABLE STAGES

Specifier Notes: This section covers StageRight portable, stage extension platform systems, including "ME-1000" support systems. Consult StageRight for assistance in editing this section for the specific application.

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Stage extension platform systems.

1.2 SUBMITTALS

Specifier Notes: Edit submittal requirements as necessary. Delete submittals not required.

- A. Comply with Section 01 33 00 – Submittal Procedures.
- B. Product Data: Submit manufacturer's product data.

- C. Shop Drawings: Submit manufacturer's shop drawings, including plans, elevations, sections, and details, indicating dimensions, tolerances, materials, components, fabrication, fasteners, hardware, finish, options, and accessories.
- D. Manufacturer's Certification: Submit manufacturer's certification that materials comply with specified requirements and are suitable for intended application.
- E. Manufacturer's Project References: Submit manufacturer's list of successfully completed stage extension platform system projects, including project name and location, name of architect, and type and quantity of stage extension platform systems furnished.
- F. Operation and Maintenance Data: Submit manufacturer's operation and maintenance manuals, including operation, maintenance, and cleaning instructions.
- G. Warranty Documentation: Submit manufacturer's standard warranty.

1.3 QUALITY ASSURANCE

- A. Manufacturer's Qualifications: Minimum 25 years of experience in the manufacturing of stage extension platform systems of similar type to that specified.

1.4 DELIVERY AND STORAGE

- A. Delivery Requirements: Deliver stage extension platform systems to site in manufacturer's original, unopened containers and packaging, with labels clearly identifying product name and manufacturer.
- B. Storage Requirements: Store stage extension platform systems at location designated by the Owner.

1.5 WARRANTY

- A. Warranty Period: 3 years from date of delivery.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturer: StageRight, 495 Pioneer Parkway, Clare, Michigan 48617. Toll Free 800-438-4499. Website www.stageright.com. E-mail stageright@rogersgrp.com.
- B. Substitutions: Not permitted.
- C. Single Source: Provide all components of stage extension platform systems by single manufacturer.

2.2 STAGE EXTENSION PLATFORM SYSTEMS

- A. Stage Extension Platform System Components:

1. Support Systems: "ME-1000".
2. Decks.
3. Skirting.
4. Transport carts.

B. Portable system.

C. Incorporate "floating deck" design, permitting use of modular decks in conjunction with various support systems to create performance staging with heights ranging from 3.2 inches to 108 inches.

D. Floating Deck: When coupled with StageRight major event support systems, permits creation of performance stage.

E. System Assembly: No special equipment or tools required.

F. Maximum Weight of Individual Components: Approximately 140 pounds.

G. Support Structure: Permit bridging of decks between units, facilitating rapid setup and leveling.

2.3 SUPPORT SYSTEMS

A. Support Systems: "ME-1000".

B. Description: Portable, modular, staging support system with stable, wobble-free understructure.

Specifier Notes: Specify **one** of the following **two** styles of support system. Specify adjustable height range. Consult StageRight for availability of other adjustable height ranges by special order.

C. Support System Style: Arena.

1. Adjustable Height Range: [24 to 36 inches] [32 to 48 inches] [36 to 56 inches] [48 to 78 inches] [72 to 108 inches].

D. Support System Style: All-Terrain.

1. Adjustable Height Range: [24 to 36 inches] [32 to 48 inches] [36 to 56 inches] [48 to 78 inches].
2. Each leg can be set at different coarse heights to accommodate variable contours or uneven surfaces.

E. Certified Uniformly Distributed Live-Load Capacity: 4,000 pounds per 4-foot by 8-foot section (125 pounds per square foot).

F. Storage: Supports store compactly.

G. Setup: Assembled without tools by a minimum of 2 people.

H. Locator Nodes:

1. Conical Nodes on Locator Plates: Guide decks into location and proper alignment, securing them in place without tools, clamps, or clips.

2. Decks: Fasten in place and stage sections interlock without tools, clamps, or separate processes.
- I. Bridging:
 1. Alternating Sections of Staging (both front-to-back and side-to-side): Composed of decks that suspend, or "bridge", between support assemblies.
 - J. Adjustable Height:
 1. Height: Adjust in increments of 2 inches without tools.
 2. Adjustments: Executed from standing position by raising or lowering inner column of supports.
 - K. Construction:
 1. Vertical Columns: 2-1/2-inch IPS aluminum pipe, Schedule 40.
 2. Telescopic Inner Legs: 2-inch IPS aluminum pipe, Schedule 80.
 3. Horizontal and Diagonal Braces:
 - a. 2-inch OD aluminum hollow bar.
 - b. Attach to frame with self-locking hooks that encircle nearly 70 percent of tube and require manual release.
 4. Locator plates with welded-on nodes.
 5. Screw Feet:
 - a. At base of each column.

Specifier Notes: Provide a range of fine-adjustment leveling. Consult StageRight for more information.

- b. Adjustment: _____-inch range of fine-adjustment leveling.
- c. Diameter: Minimum of 3/4 inches.
- d. Threads: Zinc-plated Acme.
- e. Bottom of Feet: Molded urethane pads, minimum of 2-7/8-inch diameter.
6. Velcro Dots: Prevent metal-to-metal contact between inner and outer columns.

L. Finish: Non-glare, black, baked-on powder coat.

2.4 DECKS

- A. Material: Composite structure with skins of 1/8-inch, exterior-grade, Douglas fir plywood, laminated to 0.35-inch surfaces and bonded to 2-1/4-inch-thick honeycomb-core material with waterproof urethane adhesive.
- B. Performance Surfaces:

Specifier Notes: Specify **two** performance surfaces for the decks, one for each side. Delete surfaces not required. Consult StageRight for information regarding custom performance surfaces.

1. "TechStage", 0.095-inch surface of fiberglass-reinforced polymeric with black texture.
2. "PolyTrac", black, slip-resistant ABS.
3. Commercial-grade polyolefin carpet.
4. Tempered hardboard prepared as a paintable surface.



- C. Edging:
 - 1. Material: Aluminum alloy 6005-T5.
 - 2. Enclose deck.
 - 3. Extruded Interlock Track: Receive accessories.
 - 4. Attach to Deck: Adhesives and riveted corner brackets.
 - 5. Finish: Silver anodize or black powder coat paint.
- D. Relationship with Support Systems: Not permanently part of a given support system, but function with several support structures available from manufacturer.
- E. Loads:
 - 1. Design decks to support a load of 125 pounds per square foot and a point load of 600 pounds on a 1-inch-square area on honeycomb core with 3/8-inch cell.
 - 2. Carpeted Surface: Support a point load of 300 pounds on a 1-inch-square area on honeycomb core with 3/8-inch cell.
- F. Construction: No bolts or welded joining of deck components.
- G. Honeycomb Core Design: Absorbs drum-head effect and distracting foot noise.
- H. Decks Not Acceptable: Single-sided frame-style decks with sound-absorbing material added to bottom.

2.5 ACCESSORIES

Specifier Notes: Specify required accessories. Delete accessories not required.

- A. Skirting:
 - 1. Material: Noncombustible, 100 percent PolyTwill.
 - 2. Conformance: Local fire codes.
 - 3. Skirt Attachment Clips:
 - a. Material: Semi-rigid vinyl.
 - b. Sewn into top hem of skirt at regular intervals along its entire length.
 - c. Engage into deck interlock track for attachment to stage.
 - 4. Skirt Height Adjustment: Velcro strips sewn into reverse side of skirt.
 - 5. Skirting Valence: Knife or box pleated with a fullness of 50 percent.
- B. Transport Carts:
 - 1. Transport stage extension platform systems.
 - 2. Material: Welded steel tubing.
 - 3. Fork Truck Access: 4 sides.
 - 4. Casters: Minimum of 4 heavy-duty swivel casters.
 - 5. Contain their intended load in a secure and organized manner.

PART 3 EXECUTION

3.1 TRAINING

- A. Provide instruction and training of Owner's personnel in the operation and maintenance of stage extension platform systems.
- B. Provide instruction and training by factory-trained and certified representative of manufacturer.

END OF SECTION

2/9/2018

Wahl Tents
44550 North Groesbeck Highway
Clinton Township, MI 48036
Attn: Stephanie King

Eureka 60' Clearspan Peer Review
CRE Project #: 18.1101.03

Dear Stephanie,

We have completed our peer review for the above referenced project for conformance to the structural provisions of the 2015 International Building Code.

A peer review has been performed on the Eureka 60' clearspan tent, as seen on the attached drawing page. Tent frames are located approximately 15' on center. Original engineering documentation has been provided in Appendix A. The tent has been designed as a temporary structure to be installed no greater than 180 days. The wind exposure used in calculations is exposure C and represents a flat open field or similar conditions excluding exposure to large bodies of water.

It should be known that the tent did not include any snow loading and that any and all snow accumulations shall be removed immediately. Drawings include base reactions that earth anchors, or ballast, must be adequate to resist.

To the best of our knowledge the attached original engineering conforms with the requirements of the 2015 International Building Code.



We trust this information is suitable for your needs at this time. If you have any questions, please do not hesitate to contact our office.

Regards,
Clark-Reder Engineering, Inc.




Andrew L. Savage, E.I.T.


Jeffrey M. Reder, P.E.
MI Registration No.: 6201056952

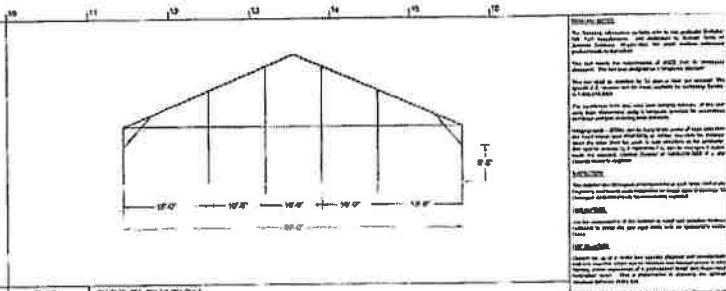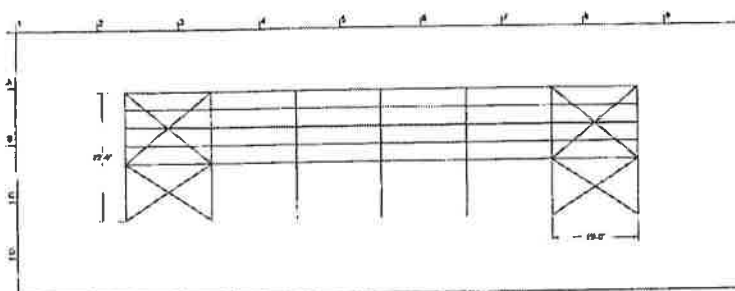

E1 FRONT ELEVATION
SCALE: 1/8" = 1'-0"


E10 SIDE ELEVATION
SCALE: 1/8" = 1'-0"

NOTE:
THESE CALCULATIONS AND/OR DRAWINGS ARE ONLY AUTHORIZED FOR USE IF THEY HAVE BEEN REVIEWED FOR SPECIFIC SITE CONDITIONS AND HAVE A SEAL AND SIGNATURE REPRODUCED BY A LICENSED ENGINEER WHO IS EMPLOYED BY MADGETOOSH & MADGETOOSH, INC. IF THESE CALCULATIONS AND/OR DRAWINGS ARE USED WITHOUT THE KNOWLEDGE OF MADGETOOSH & MADGETOOSH, THE USER ASSUMES ALL RESPONSIBILITY AND LIABILITY FOR THESE USE. MADGETOOSH & MADGETOOSH, INC. CANNOT MAKE ANY REPRESENTATIONS AS TO THE ACCURACY OF ANY PHOTOGRAPHED DOCUMENTS WITHOUT OUR REVIEW.

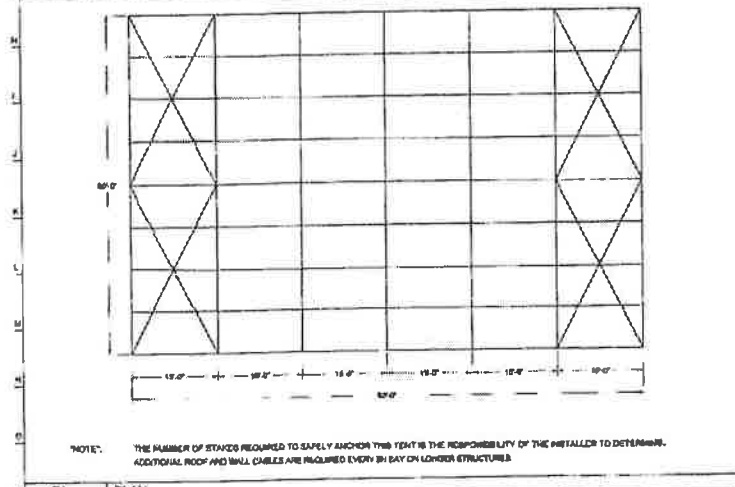

P1 PLAN
SCALE: 1/4" = 1'-0"

NOTE: THE NUMBER OF STAKES REQUIRED TO SAFELY ANCHOR THIS TENT IS THE RESPONSIBILITY OF THE INSTALLER TO DETERMINE. ADDITIONAL ROOF AND WALL CHAINS ARE REQUIRED EVERY 8 FEET ON LOWER STRUCTURES.

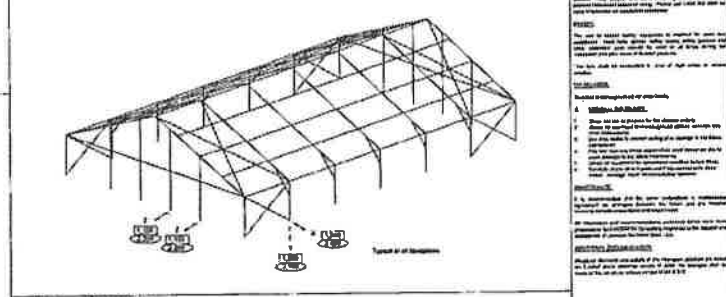

K10 3D VIEW
SCALE: NONE

DESIGN LOADS:

1. Dead Load: Tent Self Weight
2. Suspended Equipment: Two (2) 150 pound point loads per frame
3. Wind Load per ASCE 7-10 Main Wind Force Resisting System
76 mph 3-second Gust; Appendix G, Figure CC-1 (10-Year MRFI)
Exposure "C"

REACTION FORCES AT BASE PLATES:

1. (XXXX) = Actual force at baseplate due to critical load case (pounds).
2. (YYYY) = Capacity required of anchor/stake, with safety factor (pounds).
3. Installer is responsible for determining actual anchor capacity developed in situation.

P10 GENERAL NOTES
SCALE: NONE

GENERAL NOTES:

1. See notes on drawings for details and specifications. Refer to the manufacturer's literature for details and specifications.

2. The user is responsible for determining the actual anchor capacity developed in situation.

3. The user is responsible for determining the actual anchor capacity developed in situation.

4. The user is responsible for determining the actual anchor capacity developed in situation.

5. The user is responsible for determining the actual anchor capacity developed in situation.

6. The user is responsible for determining the actual anchor capacity developed in situation.

7. The user is responsible for determining the actual anchor capacity developed in situation.

8. The user is responsible for determining the actual anchor capacity developed in situation.

9. The user is responsible for determining the actual anchor capacity developed in situation.

10. The user is responsible for determining the actual anchor capacity developed in situation.

11. The user is responsible for determining the actual anchor capacity developed in situation.

12. The user is responsible for determining the actual anchor capacity developed in situation.

13. The user is responsible for determining the actual anchor capacity developed in situation.

14. The user is responsible for determining the actual anchor capacity developed in situation.

15. The user is responsible for determining the actual anchor capacity developed in situation.

16. The user is responsible for determining the actual anchor capacity developed in situation.

17. The user is responsible for determining the actual anchor capacity developed in situation.

18. The user is responsible for determining the actual anchor capacity developed in situation.

19. The user is responsible for determining the actual anchor capacity developed in situation.

20. The user is responsible for determining the actual anchor capacity developed in situation.

21. The user is responsible for determining the actual anchor capacity developed in situation.

22. The user is responsible for determining the actual anchor capacity developed in situation.

23. The user is responsible for determining the actual anchor capacity developed in situation.

24. The user is responsible for determining the actual anchor capacity developed in situation.

25. The user is responsible for determining the actual anchor capacity developed in situation.

26. The user is responsible for determining the actual anchor capacity developed in situation.

27. The user is responsible for determining the actual anchor capacity developed in situation.

28. The user is responsible for determining the actual anchor capacity developed in situation.

29. The user is responsible for determining the actual anchor capacity developed in situation.

30. The user is responsible for determining the actual anchor capacity developed in situation.

31. The user is responsible for determining the actual anchor capacity developed in situation.

32. The user is responsible for determining the actual anchor capacity developed in situation.

33. The user is responsible for determining the actual anchor capacity developed in situation.

34. The user is responsible for determining the actual anchor capacity developed in situation.

35. The user is responsible for determining the actual anchor capacity developed in situation.

36. The user is responsible for determining the actual anchor capacity developed in situation.

37. The user is responsible for determining the actual anchor capacity developed in situation.

38. The user is responsible for determining the actual anchor capacity developed in situation.

39. The user is responsible for determining the actual anchor capacity developed in situation.

40. The user is responsible for determining the actual anchor capacity developed in situation.

41. The user is responsible for determining the actual anchor capacity developed in situation.

42. The user is responsible for determining the actual anchor capacity developed in situation.

43. The user is responsible for determining the actual anchor capacity developed in situation.

44. The user is responsible for determining the actual anchor capacity developed in situation.

45. The user is responsible for determining the actual anchor capacity developed in situation.

46. The user is responsible for determining the actual anchor capacity developed in situation.

47. The user is responsible for determining the actual anchor capacity developed in situation.

48. The user is responsible for determining the actual anchor capacity developed in situation.

49. The user is responsible for determining the actual anchor capacity developed in situation.

50. The user is responsible for determining the actual anchor capacity developed in situation.

51. The user is responsible for determining the actual anchor capacity developed in situation.

52. The user is responsible for determining the actual anchor capacity developed in situation.

53. The user is responsible for determining the actual anchor capacity developed in situation.

54. The user is responsible for determining the actual anchor capacity developed in situation.

55. The user is responsible for determining the actual anchor capacity developed in situation.

56. The user is responsible for determining the actual anchor capacity developed in situation.

57. The user is responsible for determining the actual anchor capacity developed in situation.

58. The user is responsible for determining the actual anchor capacity developed in situation.

59. The user is responsible for determining the actual anchor capacity developed in situation.

60. The user is responsible for determining the actual anchor capacity developed in situation.

61. The user is responsible for determining the actual anchor capacity developed in situation.

62. The user is responsible for determining the actual anchor capacity developed in situation.

63. The user is responsible for determining the actual anchor capacity developed in situation.

64. The user is responsible for determining the actual anchor capacity developed in situation.

65. The user is responsible for determining the actual anchor capacity developed in situation.

66. The user is responsible for determining the actual anchor capacity developed in situation.

67. The user is responsible for determining the actual anchor capacity developed in situation.

68. The user is responsible for determining the actual anchor capacity developed in situation.

69. The user is responsible for determining the actual anchor capacity developed in situation.

70. The user is responsible for determining the actual anchor capacity developed in situation.

71. The user is responsible for determining the actual anchor capacity developed in situation.

72. The user is responsible for determining the actual anchor capacity developed in situation.

73. The user is responsible for determining the actual anchor capacity developed in situation.

74. The user is responsible for determining the actual anchor capacity developed in situation.

75. The user is responsible for determining the actual anchor capacity developed in situation.

76. The user is responsible for determining the actual anchor capacity developed in situation.

77. The user is responsible for determining the actual anchor capacity developed in situation.

78. The user is responsible for determining the actual anchor capacity developed in situation.

79. The user is responsible for determining the actual anchor capacity developed in situation.

80. The user is responsible for determining the actual anchor capacity developed in situation.

81. The user is responsible for determining the actual anchor capacity developed in situation.

82. The user is responsible for determining the actual anchor capacity developed in situation.

83. The user is responsible for determining the actual anchor capacity developed in situation.

84. The user is responsible for determining the actual anchor capacity developed in situation.

85. The user is responsible for determining the actual anchor capacity developed in situation.

86. The user is responsible for determining the actual anchor capacity developed in situation.

87. The user is responsible for determining the actual anchor capacity developed in situation.

88. The user is responsible for determining the actual anchor capacity developed in situation.

89. The user is responsible for determining the actual anchor capacity developed in situation.

90. The user is responsible for determining the actual anchor capacity developed in situation.

91. The user is responsible for determining the actual anchor capacity developed in situation.

92. The user is responsible for determining the actual anchor capacity developed in situation.

93. The user is responsible for determining the actual anchor capacity developed in situation.

94. The user is responsible for determining the actual anchor capacity developed in situation.

95. The user is responsible for determining the actual anchor capacity developed in situation.

96. The user is responsible for determining the actual anchor capacity developed in situation.

97. The user is responsible for determining the actual anchor capacity developed in situation.

98. The user is responsible for determining the actual anchor capacity developed in situation.

99. The user is responsible for determining the actual anchor capacity developed in situation.

100. The user is responsible for determining the actual anchor capacity developed in situation.

Eureka!
Above all, we stand special.

© 2010 Eureka Tent Company. All rights reserved. Eureka Tent Company is a registered trademark of Eureka Tent Company.

0-08 (10)

TERMS AND CONDITIONS

This contract contains important terms and conditions including Wahl Tents LLC disclaimer from all liability for injury or damage and details of the customer's obligations. These terms and conditions are a part of this contract — PLEASE READ!

Reservation policy: When equipment is reserved, Wahl Tents immediately schedules a crew and removes those items from the inventory for the reserved date(s).

An order is not considered confirmed until the non-refundable deposit of 50% of the total amount is made and this signed contract is returned to Wahl Tents.

Commercial customers may be billed with a PO arrangement at the discretion of Wahl Tents.

Residential customers must be paid in full 2 weeks prior to the scheduled event.

Refunds:

Refunds on cancelled items are as follows (this applies to each and every item cancelled, even if it is the entire order. This does not include the deposit, as the deposit is nonrefundable):

Cancelling 30+ days prior to delivery date- 100% refund on cancelled item(s).

Cancelling within 14-29 days prior to delivery date- 75% refund on cancelled item(s)

Cancelling within 8-13 days prior to delivery- 50% refund on cancelled item(s)

7 days or less-----No refund given on any items

CUSTOMER RESPONSIBILITIES:

Permits: Customer shall provide all necessary permits, licenses, and /or/ consent at the customer's expense prior to installation.

It is the customer's responsibility to check into building permit and fire department requirements prior to the installation date to confirm the possible requirement of permits. We will assist you in any way possible, but obtaining these permits does remain the responsibility of the customer.

Property Preparation: Refunds will not be issued if the tent ordered does not fit the property due to incorrect measurements done by the customer. Wahl Tents offers a measurement service of \$25 to ensure correct tent sizing for the property in question.

The area of installation should be prepped 2-3 days before tent install in the event of schedule shifting. (i.e. cutting the lawn, treating area for insects, etc)

I am aware that it is the law to call MSDIGG 48 hrs prior to the tent stakes going into the ground. MI 1-800-482-7171 (This does not pertain to graduation or backyard events).

Wahl Tents LLC will not be responsible for septic field or septic tank damage.

All underground irrigation, sprinkler systems need to be marked and pointed out to the delivery crew before installation. If any underground systems are not communicated to Wahl Tents personnel via clear visual markers or if incorrect information is given, Wahl Tents will not be held responsible for any underground damages. The premises upon which equipment is to be delivered shall be accessible to delivery by trucks. Rates do not include excessive carry of objects. Premises and /or/ tent shall be clear of all obstructions, impediments and decorations before Wahl Tents begins installation or breakdown. Any delays, obstructions, or excessive carrying causing the delay of delivery/ installation or pick up/breakdown of equipment will incur additional charges of \$25.00/Hour/Man.

Delivery/Setup & Pickup/Strike: Any repositioning or moving of the tent once installation begins shall be charged at the aforementioned rate of \$25.00/Hour/Man. If the event is being held in a location requiring a pass or charge for entry and exit (i.e. parks, clubs, ferry fee's, etc.), the customer is responsible for all charges/fee's involved.

Rental fees for table and chairs do not include set up or breakdown, unless previous arrangements have been made. Customer is responsible for breaking down and stacking furniture in one sheltered area for pick up. If furniture is not broken down and stacked when crew arrives, a fee of \$1.25 per table and \$.75 per chair will be assessed. Should time constraints not permit us to breakdown furniture at this time, one additional rental may incur, as well as breakdown charges.

All decorations and non-leased equipment shall be removed from the tent before the time of breakdown. All staples and /or/ tape must be removed from tables, chairs, and tent poles. Failure to remove attachments will result in repair/ repaint/ removal charges.

An adult representative is recommended to be present to show exact location of installation. This representative is also recommended to count and sign off on all items, otherwise it is to be agreed that the counts performed by Wahl Tents will be considered accurate.

Lost and damaged: Customer is solely responsible for all rental items during the rental period from installation through take down. The customer assumes responsibility for any and all damages due to negligence, theft, vandalism, misuse, or other avoidable occurrences during this rental period. This responsibility of the customer includes paying the full replacement charge of any and all lost or damaged items.

If any equipment is missing or does not function properly, I understand and agree to notify Wahl Tent's office or emergency line within 30 minutes of occurrence otherwise no refund or allowance will be made. An emergency number is available on the answering service at 586-493-0563 for after-hours occurrences. It is still the responsibility of the customer to contact the office to report an occurrence of items not functioning properly, even if the matter was reported to a Wahl Tents crew member onsite.

Customer Pickup: A driver's license as well as a credit card is required to be on file for customer pickups. Wahl Tents warehouse staff may help, but is not responsible for loading the customer's vehicle and are held harmless of any damages.

Any equipment returned after the date/time items are due back is subject to additional charges.

Additional Responsibilities: It is the customer's responsibility to have a detailed evacuation plan in the event of high winds and/or severe weather. Tents are a temporary shelter and must be evacuated in the event of high winds and /or/ severe weather.

During snow conditions, customer shall at their sole expense be responsible for eliminating the buildup of snow and ice on all winter tent installations, through heating or other effective method unless prior arrangements have been made. Customer assumes all responsibility for damages due to any accumulated buildup.

Customer shall assume risk of, and compensation, and hold Wahl Tents LLC harmless from and against any and all property damage and personal injury resulting from:

(1) People or property coming in contact with or falling over ropes, straps, poles, stakes, or other supports of the above mentioned equipment, while in or about said property.

(2) Contact with pipes, wires, or other obstructions, such as but not limited to, gas pipes, irrigation, electrical wires, trees, flowers, bushes planters, buildings, or gutters, while delivering, loading, unloading, erecting, dismantling, and /or/ use of said equipment.

(3) Injuries or damages caused by fire, rain, hail, sleet, snow, storms, high winds, tornadoes, floods, or other disturbances of nature, or by equipment falling or falling by reason thereof upon any persons, materials, or exhibits, while under or about said property.

STATEMENT: Wahl Tents LLC will not be liable for the erection of tents or structures on stated date in case of forecast, storms or excessive winds that might cause damage to said property.

Wahl Tents LLC shall be released hereunder for conditions brought about by acts of God, strikes, boycotts, civil insurrections or commotions, invasions by a common enemy, or other conditions beyond our control.

I, the customer, agree that if I fail to make a payment or if I am responsible for any additional charges due to any of the possible occurrences described in this contract, I the customer authorize to allow Wahl Tents to charge my credit card on file.

Delinquent accounts (30 or more days old) may, at the sole discretion of Wahl Tents LLC be charged 1.5% per month interest charge. Customer also agrees to pay all reasonable collection fees, including but not limited to: attorney fees, court costs, and collection service charges.

I certify that I have read and agree to all terms of this contract.

Signature: Brody Glynn Date: 9/12/18

Customer name (printed): Brody Glynn

22

BG

Quicken Loans INC. agrees to pay for any damages to the tenting + equipment that are cause by Quicken Loans INC. attendees. Quicken Loans INC. will not be responsible, however, for ordinary wear and tear or for damages that was caused by persons other than Quicken Loans + its attendees. If the Tent Company is notified of damages during event, The Tent Company will notify Quicken Loans INC., in writing, of any damage and any related charges within 24 hours. The Tent Company will also provide photographic evidence with a written description if any such damage occur. The Tent Company further agrees to repair any damages in a commercial reasonable manner.

Wahl Tents

44550 N Groesbeck Hwy
 Clinton Township, MI 48036
 www.wahlrentals.com

586-493-0563 phone
 586-493-0690 fax

Status: Reservation

Contract #: 10442
 Event Beg: Tue 9/25/2018 9:00AM
 Event End: Fri 9/28/2018 5:00PM
 Operator: Stephanie

Quicken Loans Community Investment F 1050 Woodward Ave Detroit, MI 48226	Customer# 7051 888 900-9962	Contract Info: 2-60x210 + 1- 60x90
--	--------------------------------	------------------------------------

Ordered By: Becky
 Salesman: Stephanie

DELIVERY AND PICKUP

Delivery Date: Tue 9/25/18
 Pickup Date: Fri 9/28/18
 Location: Lots 1 & 2 near Comerica
 Address: ; Detroit, MI 48226
 Install first lot on 25th, second lot install on 26th
 Strike on 28th, possibly 29th.

Contact: Becky
 Phone: 313 820-5451

Date of event:: September 27th
 Type of surface:: Concrete- No staking
 Water on site?: No

Qty	Description	Each	Price
2	ClearSpan 60x210	\$21,420.00	\$42,840.00
1	Tolohandler	\$1,800.00	\$1,800.00
1	Clearspan 60x90	\$3,180.00	\$3,180.00
100	CEMENT ANCHOR	\$50.00	\$5,000.00
100	Cement Anchor Covers- Black	\$10.00	\$1,000.00
Qty	Description	Each	Price
1	20% Labor/Delivery/Pickup Fee	\$11,964.00	\$11,964.00

COMPLETE EVENT MANAGEMENT

RENTAL CONTRACT

This is a contract. All pages of this contract contain important terms and conditions including lessor's disclaimer from all liability for injury or damage and details of customer's obligations. These terms and conditions are a part of this contract - READ THEM!

If equipment does not function properly notify lessor within 30 minutes of occurrence or no refund or allowance will be made.

I certify that I have read and agree to all terms of this contract on all pages.

Rental:	\$59,820.00
Damage Waiver:	\$0.00
Sales:	\$0.00
Delivery Charge:	\$11,964.00
Misc. Charges:	\$0.00
Subtotal:	\$71,784.00
Sales Tax:	\$3,589.20
TOTAL:	\$75,373.20
PAID:	\$0.00
AMOUNT DUE:	\$75,373.20

SIGNATURE: 
 Quicken Loans Community Investment Fund

23

Request for Taxpayer Identification Number and Certification

Give Form to the
 requester. Do not
 send to the IRS.

Print or type
 See Specific Instructions on page 2.

1 Name (as shown on your income tax return). Name is required on this line; do not leave this line blank. Wahl Tents LLC	
2 Business name/disregarded entity name, if different from above	
3 Check appropriate box for federal tax classification; check only one of the following seven boxes: <input type="checkbox"/> Individual/sole proprietor or single-member LLC <input checked="" type="checkbox"/> Limited liability company. Enter the tax classification (C=C corporation, S=S corporation, P=partnership) ▶ S <small>Note. For a single-member LLC that is disregarded, do not check LLC; check the appropriate box in the line above for the tax classification of the single-member owner.</small> <input type="checkbox"/> Other (see instructions) ▶	4 Exemptions (codes apply only to certain entities, not individuals; see instructions on page 3): Exempt payee code (if any) _____ Exemption from FATCA reporting code (if any) _____ <small>(Applies to accounts mentioned outside the U.S.)</small>
5 Address (number, street, and apt. or suite no.) 44550 N Groesbeck Hwy	Requester's name and address (optional)
6 City, state, and ZIP code Clinton Township MI 48036	
7 List account number(s) here (optional)	

Part I Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on line 1 to avoid backup withholding. For individuals, this is generally your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the Part I instructions on page 3. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN* on page 3.

Note. If the account is in more than one name, see the instructions for line 1 and the chart on page 4 for guidelines on whose number to enter.

Social security number									
<table border="1" style="width: 100%; height: 20px;"> <tr> <td style="width: 25%;"></td> <td style="width: 25%;"></td> <td style="width: 25%;"></td> <td style="width: 25%;"></td> </tr> </table>					<table border="1" style="width: 100%; height: 20px;"> <tr> <td style="width: 25%;"></td> <td style="width: 25%;"></td> <td style="width: 25%;"></td> <td style="width: 25%;"></td> </tr> </table>				
or									
Employer identification number									
<table border="1" style="width: 100%; height: 20px;"> <tr> <td style="width: 25%;"></td> <td style="width: 25%;"></td> <td style="width: 25%;"></td> <td style="width: 25%;"></td> </tr> </table>					<table border="1" style="width: 100%; height: 20px;"> <tr> <td style="width: 25%;"></td> <td style="width: 25%;"></td> <td style="width: 25%;"></td> <td style="width: 25%;"></td> </tr> </table>				

Part II Certification

Under penalties of perjury, I certify that:

1. The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me); and
2. I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding; and
3. I am a U.S. citizen or other U.S. person (defined below); and
4. The FATCA code(s) entered on this form (if any) indicating that I am exempt from FATCA reporting is correct.

Certification Instructions. You must cross out item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the certification, but you must provide your correct TIN. See the instructions on page 3.

Sign Here	Signature of U.S. person ▶	Date ▶ 06/21/2017
------------------	----------------------------	--------------------------

General Instructions

Section references are to the Internal Revenue Code unless otherwise noted.
Future developments. Information about developments affecting Form W-9 (such as legislation enacted after we release it) is at www.irs.gov/ir9.

Purpose of Form

An individual or entity (Form W-9 requester) who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) which may be your social security number (SSN), individual taxpayer identification number (ITIN), adoption taxpayer identification number (ATIN), or employer identification number (EIN), to report on an information return the amount paid to you, or other amount reportable on an information return. Examples of information returns include, but are not limited to, the following:

- Form 1099-INT (interest earned or paid)
- Form 1099-DIV (dividends, including those from stocks or mutual funds)
- Form 1099-MISC (various types of income, prizes, awards, or gross proceeds)
- Form 1099-B (stock or mutual fund sales and certain other transactions by brokers)
- Form 1099-S (proceeds from real estate transactions)
- Form 1099-K (merchant card and third party network transactions)

- Form 1098 (home mortgage interest), 1098-E (student loan interest), 1098-T (tuition)
 - Form 1099-C (canceled debt)
 - Form 1099-A (acquisition or abandonment of secured property)
- Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN.
- If you do not return Form W-9 to the requester with a TIN, you might be subject to backup withholding. See *What is backup withholding?* on page 2.
- By signing the filled-out form, you:
1. Certify that the TIN you are giving is correct (or you are waiting for a number to be issued).
 2. Certify that you are not subject to backup withholding, or
 3. Claim exemption from backup withholding if you are a U.S. exempt payee. If applicable, you are also certifying that as a U.S. person, your allocable share of any partnership income from a U.S. trade or business is not subject to the withholding tax on foreign partners' share of effectively connected income, and
 4. Certify that FATCA code(s) entered on this form (if any) indicating that you are exempt from the FATCA reporting, is correct. See *What is FATCA reporting?* on page 2 for further information.

24

Mackintosh & Mackintosh, Inc.

CONSULTING STRUCTURAL ENGINEERS SINCE 1941

M&M File No.	<u>VAR-2016-0021</u>
Date	<u>August 2016</u>
Client	<u>Johnson Outdoors</u> <u>7625 Conklin Road</u> <u>Binghamton, New York 13901</u>
Structure Type	<u>ESPAN Structure</u>
User or Site Location	_____
Span	<u>60 Feet</u>
Overall Length	_____
Bay Width	<u>15 Feet Bay</u>
Roof Slope	<u>23 Degrees</u>
Wall Height	<u>10 Feet</u>
Applicable Code	<u>Wind Load per ASCE 7-10</u> <u>Appendix C; Figure CC-1 10 Year MRI</u>
Wind Speed	<u>76 mph Gust Wind Zones, Exposure "C"</u>
Additional Loads:	<u>None</u>
Snow Load	<u>Not Significant-Available on Request</u>
Seismic Load	<u>4-150 Pound Loads per Frame (See Sh 4)</u>
Suspended Equipment	_____
Occupancy Category	<u>Temporary Use Only (Less than 180 days)</u>
Number of Purlins per Bay	<u>9</u>
Wall Configuration	<u>Closed Four Sides</u>
Anchor Loads	<u>See Reactions, Sh 6</u>
X-Bracing	<u>1/2 Inch Wire Rope 2-Bay</u>
Reinforcing Elements/Special Features	_____
Event Dates:	Installation Date: _____ Take Down Date: _____



NOTE: THESE CALCULATIONS AND/OR DRAWINGS ARE ONLY AUTHORIZED FOR USE IF THEY HAVE BEEN REVIEWED FOR SPECIFIC SITE CONDITIONS AND HAVE A WET STAMP AND SIGNATURE IN RED INK BY A LICENSED ENGINEER WHO IS EMPLOYED BY MACKINTOSH & MACKINTOSH, INC. IF THESE CALCULATIONS AND/OR DRAWINGS ARE USED WITHOUT THE KNOWLEDGE OF MACKINTOSH & MACKINTOSH THE USER ASSUMES ALL RESPONSIBILITY AND LIABILITY FOR THEIR USE. MACKINTOSH & MACKINTOSH, INC. CANNOT MAKE ANY REPRESENTATIONS AS TO THE ACCURACY OF ANY PHOTOCOPIED DOCUMENTS WITHOUT OUR REVIEW.

Johnson/ESPAN/60/76/C/15
ENGINEER:

5858 DARWOOD AVENUE • LOS ANGELES, CALIFORNIA 90004 • TEL: (323) 662-1184 • FAX: (323) 662-7541

Honor Robson

SHEET NO.

1 of _____

25

Mackintosh & Mackintosh, Inc.

CONSULTING STRUCTURAL ENGINEERS SINCE 1941

Job Title: 60 Foot Espan Tent Structure
Address: Various

M&M File no.: VAR-2016-0021
Date: September 2016
Client: Johnson Outdoors

Material Properties

Aluminum: 6061-T6 or equal. See "Aluminum Design Manual", 8th Edition, 2005, The Aluminum Association. Portions cited: Part I-A, Specifications for Aluminum Structures, Allowable Stress Design, and Design Aids, Pages VII-66 and VII-67.

Steel Cable: ASTM A603, Class C

Wind Loading

Calculation Method	Per ASCE 7-10, Method of Figure 27.4-1
Wind Speed, V	76 mph (3-second gust) Appendix C: Figure CC-1 10-Year MRI
Exposure	C
Mean Roof Height, h	18.4 feet
Coefficient K_h	0.85 @ Windward Wall (Table 27.3-1)
Coefficient K_s	0.89 Elsewhere (Based on h = 20 ft.)
Coefficient K_D	0.85 (Table 6-6)
Velocity Pressure, q_h = $.00256K_zK_DV^2I$	10.68 psf @ Windward Wall 11.19 psf Elsewhere
Roof Slope	23 degrees
Internal Pressure, GC_{pi}	± 0.18 (Table 6-7)
h/L for Fig. 6-3	$18.4/60 = 0.31$
L/B for Fig. 6-3	Less than 1
Gust Factor, G	0.85 (Paragraph 6.5.8.1)
Beam Spacing	15 feet 0 inch

Coefficients C_p per Figure 6-3:

Windward Wall	$C_p = +0.8$
Windward Roof	$C_p = -0.28$ (Load Case #1 & #4) $C_p = +0.15$ (Load Case #2 & #5)
Leeward Roof	$C_p = -0.6$
Leeward Wall	$C_p = -0.5$
Side Walls	$C_p = -0.7$
Roof, with Wind Parallel to Ridge	$C_p = -0.78$ (Load Case #3 & #6)

* Critical frame is 2nd from windward wall: $C_p = 0.9$, per Fig. 3 applies for over region within h = 18.4 ft. from end wall, $C_p = 0.5$ applies beyond 18.4 ft. from end wall. Averaging for 2nd frame, $C_p = 0.78$.

Johnson/ESPAN/60/76/C/15
ENGINEER:

3838 OAKWOOD AVENUE • LOS ANGELES, CALIFORNIA 90004 • TEL: (323) 662-1184 • FAX: (323) 662-7941

Honor Robson

SHEET NO.

2 of 5

210

Mackintosh & Mackintosh, Inc.

CONSULTING STRUCTURAL ENGINEERS SINCE 1941

Job Title: 60 Foot Espan Tent Structure

Address: Various

M&M File no.: VAR-2016-0021

Date: September 2016

Client: Johnson Outdoors

Wind Loads

Load Case #1 - C_p on windward roof acts outward; combine w/ internal pressure

Windward Wall = 47 pounds per foot inward
Windward Roof = 42 pounds per foot outward
Leeward Roof = 69 pounds per foot outward
Leeward Wall = 61 pounds per foot outward

Load Case #2 - C_p on windward roof acts inward; combine w/ internal pressure

Windward Wall = 47 pounds per foot inward
Windward Roof = 5 pounds per foot outward
Leeward Roof = 69 pounds per foot outward
Leeward Wall = 61 pounds per foot outward

Load Case #3 - Wind acting normal to frames; combine w/ internal pressure

Roof = 85 pounds per foot outward
Walls = 78 pounds per foot outward

Load Case #4 - C_p on windward roof acts outward; combine w/ internal suction

Windward Wall = 84 pounds per foot inward
Windward Roof = 4 pounds per foot outward
Leeward Roof = 33 pounds per foot outward
Leeward Wall = 25 pounds per foot outward

Load Case #5 - C_p on windward roof acts inward; combine w/ internal suction

Windward Wall = 84 pounds per foot inward
Windward Roof = 31 pounds per foot inward
Leeward Roof = 33 pounds per foot outward
Leeward Wall = 25 pounds per foot outward

Load Case #6 - Wind acting normal to End Wall:

Windward Wall = $2 (q_z C_p A) = 2 (11.19) (0.8) (247) = 4,422$ pounds inward
Leeward Wall = $2 (q_z C_p A) = 2 (10.68) (-0.5) (247) = 2,638$ pounds outward

Johnson/ESPAN/60/76/C/15
ENGINEER:

1000 Channing Avenue • Los Angeles, California 90009 • Tel. (323) 667-1184 • Fax (323) 667-1694

Honor Robson

SHEET NO.

3 of 5

27

Mackintosh & Mackintosh, Inc.

Consulting Engineers, Estimators Since 1976

Job Title: 60 Foot Espan Tent Structure

Address: Various

M&M File no.: VAR-2016-0021

Date: September 2016

Client: Johnson Outdoors

Suspended Equipment Loads

Load Case #7 - Two Point Loads of P = 150 pounds

Load Case #8 - One Point Load of P = 150 pounds

Beam Dead Weight

Load Case #9 - Beam self-weight will be added in computer analysis

Combine Loads per Paragraph 2.4.1:

Notes: Load combination including Wind #2 & #5 are more critical using suspended equipment

Load combinations including Wind #1, #3 & #4 are more critical using 0.6D + W

Load Combination #1	(0.6) Wind #1 + (0.6) Dead
Load Combination #2	(0.6) Wind #3 + (0.6) Dead
Load Combination #3	(0.6) Wind #4 + (0.6) Dead
Load Combination #4	(0.6) Wind #2 + Suspended Equipment + Dead
Load Combination #5	(0.6) Wind #5 + Suspended Equipment + Dead
Load Combination #6	(0.6) Wind #2 + Unbalanced Suspended Equipment + Dead
Load Combination #7	(0.6) Wind #5 + Unbalanced Suspended Equipment + Dead
Load Combination #8	(0.6) Wind #6 + Dead Load
Load Combination #8	Suspended Equipment + Dead
Load Combination #9	Unbalanced Suspended Equipment + Dead

Johnson/ESPAN/60/76/C/15

ENGINEER:

2885 Glendon Avenue • Los Angeles, CA 90004 • Tel: (310) 262-1841 • Fax: (310) 262-1841

Honor Robson

SHEET NO.

4 of 5

28

Mackintosh & Mackintosh, Inc.

CONSULTING STRUCTURAL ENGINEERS SINCE 1941

Job Title: 60 Foot Espan Tent Structure


Address: Various

M&M File no.: VAR-2016-0021

Date: August 2016

Client: Johnson Outdoors

Summary of Forces to Foundation (Due to Frame Loading)

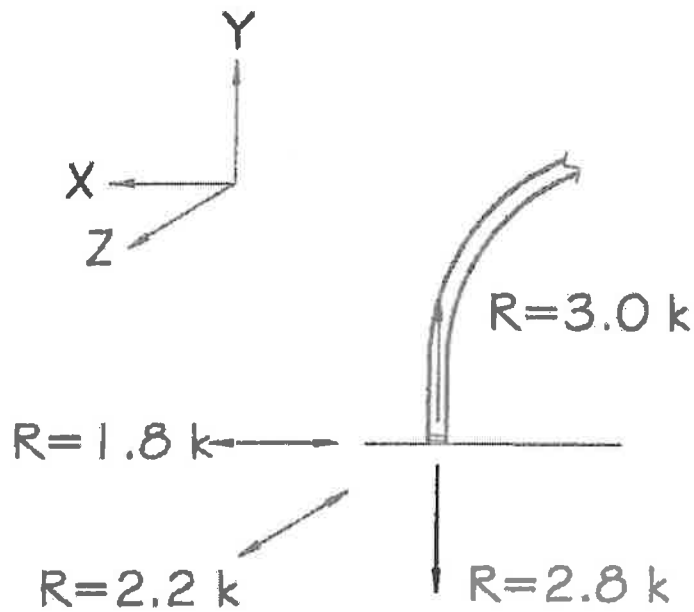

Johnson/ESPAN/60/76/C/15

ENGINEER:

3858 OAKWOOD AVENUE • LOS ANGELES, CALIFORNIA 90004 • TEL: (323) 662-1184 • FAX: (323) 662-7541

Honor Robson

SHEET NO.

5 of 5

29

Load Case #1 - C_p on windward roof acts outward; combine with internal pressure

Windward Wall	P=	5.25	w=	79 ASD	w=	47
Windward Roof	P=	-4.68	w=	-70 ASD	w=	-42
Leeward Roof	P=	-7.72	w=	-116 ASD	w=	-69
Leeward Wall	P=	-6.77	w=	-102 ASD	w=	-61

Load Case #2 - C_p on windward roof acts inward; combine with internal pressure

Windward Wall	P=	5.25	w=	79 ASD	w=	47
Windward Roof	P=	-0.59	w=	-9 ASD	w=	-5
Leeward Roof	P=	-7.72	w=	-116 ASD	w=	-69
Leeward Wall	P=	-6.77	w=	-102 ASD	w=	-61

Load Case #3 - Wind acting normal to frames; combine with internal pressure

Roof	P=	-9.43	w=	-141 ASD	w=	-85
Walls	P=	-8.67	w=	-130 ASD	w=	-78

Load Case #4 - C_p on windward roof acts outward; combine with internal suction

Windward Wall	P=	9.28	w=	139 ASD	w=	84
Windward Roof	P=	-0.68	w=	-10 ASD	w=	-6
Leeward Roof	P=	-3.69	w=	-55 ASD	w=	-33
Leeward Wall	P=	-2.74	w=	-41 ASD	w=	-25

Load Case #5 - C_p on windward roof acts inward; combine with internal suction

Windward Wall	P=	9.28	w=	139 ASD	w=	84
Windward Roof	P=	3.44	w=	52 ASD	w=	31
Leeward Roof	P=	-3.69	w=	-55 ASD	w=	-33
Leeward Wall	P=	-2.74	w=	-41 ASD	w=	-25

Load Case #6 - Wind acting normal to frames; combine with internal suction

Roof	P=	-5.40	w=	-81 ASD	w=	-49
Walls	P=	-4.64	w=	-70 ASD	w=	-42

CALCULATION METHOD ASCE 7-10 FIGURE 27.4-1

V (WIND SPEED) Figure CC-1 10 Year MRI	76 3 SECOND GUST
EXPOSURE C	
h (MEAN ROOF HEIGHT)	18.40
L (WIDTH OF BUILDING)	60.00
WALL HEIGHT	10.00
BAY SPACING	15.00
K_h (WINDWARD WALL <15')	0.85 Table 27.3-1
K_z (MEAN ROOF HEIGHT 18.4')	0.89 Elsewhere Based On h
K_d	0.85 Table 26.6
G (GUST FACTOR)	0.85 Section 26.9
$G C_{pi}$ (INTERNAL PRESSURE) +/-	0.18 Table 26.11-1
VELOCITY PRESSURE (q_h & q_z)	
$q_h (0.00256 K_h K_d V^2 I)$	10.68 Equation 27.3-1
$q_z (0.00256 K_z K_d V^2 I)$	11.19 Equation 27.3-1

COEFFICIENTS C_p PER FIGURE 27.4-1

COEFFICIENTS C_p (h/L)	0.31 .25 < .39 < .5 23 Degrees, Roof Slope
WINDWARD WALL C_p	0.80
WINDWARD ROOF C_p	-0.28 LOAD CASE 1 AND 4 0.15 LOAD CASE 2 AND 5
LEEWARD ROOF C_p	-0.60
LEEWARD WALL C_p	-0.50 L/B < 1
SIDE WALLS C_p	-0.70
ROOF WIND NORMAL TO RIDGE	-0.78 15' BAY



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90'

Aug 23, 2016
 5:45 PM
 Checked By: _____

Envelope Joint Reactions

	Joint		X (lb)	LC	Y (lb)	LC	Z (lb)	LC	MX (lb-ft)	LC	MY (lb-ft)	LC	MZ (lb-ft)	LC
1	N1	max	283.312	5	208.514	10	1.508	10	0	1	0	1	0	1
2		min	-82.311	2	-808.347	8	-1050.326	8	0	1	0	1	0	1
3	N23	max	257.073	4	836.883	5	1.802	10	0	1	0	1	0	1
4		min	-11.038	10	-920.311	8	-1083.364	8	0	1	0	1	0	1
5	N24	max	260.83	5	930.22	5	.923	4	0	1	0	1	0	1
6		min	-24.789	8	-315.764	2	-48.415	8	0	1	0	1	0	1
7	N26	max	208.537	5	430.2	5	5.11	8	0	1	0	1	0	1
8		min	-19.888	8	-104.348	2	-209	10	0	1	0	1	0	1
9	N28	max	207.384	5	444.28	5	3.361	8	0	1	0	1	0	1
10		min	-19.818	8	-34.329	2	-202	10	0	1	0	1	0	1
11	N30	max	259.044	5	472.076	10	1.044	4	0	1	0	1	0	1
12		min	-25.832	8	-788.928	4	-47.931	8	0	1	0	1	0	1
13	N32	max	579.421	1	1329.049	8	12.809	9	0	1	0	1	0	1
14		min	-458.572	8	-1274.749	2	-5.405	8	0	1	0	1	0	1
15	N54	max	568.798	8	1544.838	8	17.988	5	0	1	0	1	0	1
16		min	-348.908	2	-1177.8	2	-7.591	1	0	1	0	1	0	1
17	N55	max	901.288	1	680.612	5	.694	10	0	1	0	1	0	1
18		min	-378.8	9	-1364.094	2	-8.874	8	0	1	0	1	0	1
19	N77	max	847.708	5	574.244	9	.728	10	0	1	0	1	0	1
20		min	-489.033	2	-1364.229	2	-7.145	8	0	1	0	1	0	1
21	N78	max	905.711	1	655.94	5	.392	10	0	1	0	1	0	1
22		min	-379.952	9	-1364.221	2	-6.787	8	0	1	0	1	0	1
23	N100	max	854.003	5	578.298	9	.472	10	0	1	0	1	0	1
24		min	-488.958	2	-1364.221	2	-7.035	8	0	1	0	1	0	1
25	N101	max	905.711	1	655.94	5	.095	10	0	1	0	1	0	1
26		min	-379.952	9	-1364.221	2	-6.949	8	0	1	0	1	0	1
27	N123	max	854.003	5	578.298	9	.221	10	0	1	0	1	0	1
28		min	-488.958	2	-1364.221	2	-7.174	8	0	1	0	1	0	1
29	N124	max	519.433	1	980.308	5	.102	2	0	1	0	1	0	1
30		min	-258.288	9	-1222.855	2	-1084.018	8	0	1	0	1	0	1
31	N146	max	294.434	5	451.807	9	.023	2	0	1	0	1	0	1
32		min	-385.049	2	-1229.441	2	-1089.482	8	0	1	0	1	0	1
33	N147	max	300.054	5	1087.429	8	68.758	8	0	1	0	1	0	1
34		min	-73.945	2	-837.123	4	-.84	9	0	1	0	1	0	1
35	N169	max	260.684	4	1103.591	8	58.504	8	0	1	0	1	0	1
36		min	-11.84	10	-203.175	2	-5.621	4	0	1	0	1	0	1
37	N170	max	282.92	5	970.365	5	.361	4	0	1	0	1	0	1
38		min	-23.22	10	-295.497	2	-49.21	8	0	1	0	1	0	1
39	N172	max	223.928	5	433.873	5	5.09	8	0	1	0	1	0	1
40		min	-18.308	10	-105.185	2	-.067	10	0	1	0	1	0	1
41	N174	max	225.754	5	368.772	9	3.301	8	0	1	0	1	0	1
42		min	-19.002	10	-100.287	2	-.118	10	0	1	0	1	0	1
43	N178	max	282.433	5	408.724	10	1.196	4	0	1	0	1	0	1
44		min	-23.849	10	-478.557	1	-48.785	8	0	1	0	1	0	1
45	Totals:	max	7073.962	7	8970.155	9	0	9						
46		min	0	2	-16497.907	2	-4401	8						

Mackintosh & Mackintosh, Inc.

CONSULTING STRUCTURAL ENGINEERS SINCE 1941

MAM File No.	<u>VAR-2016-0021</u>
Date	<u>August 2016</u>
Client	<u>Johnson Outdoors</u> <u>7625 Conklin Road</u> <u>Binghamton, New York 13901</u>
Structure Type	<u>ESPAN Structure</u>
User or Site Location	_____
Span	<u>50 Feet</u>
Overall Length	_____
Bay Width	<u>15 Feet Bay</u>
Roof Slope	<u>23 Degrees</u>
Wall Height	<u>10 Feet</u>
Applicable Code	<u>Wind Load per ASCE 7-10</u> <u>Appendix C: Figure CC-1 10 Year MRI</u>
Wind Speed	<u>76 mph Gust Wind Zones, Exposure "C"</u>
Additional Loads: Snow Load Seismic Load Suspended Equipment	<u>None</u> <u>Not Significant-Available on Request</u> <u>2-150 Pound Loads per Frame (See Sh 4)</u>
Occupancy Category	<u>Temporary Use Only (Less than 180 days)</u>
Number of Purlins per Bay	<u>7</u>
Wall Configuration	<u>Closed Four Sides</u>
Anchor Loads	<u>See Reactions, Sh 6</u>
X-Bracing	<u>1/2 Inch Wire Rops 2-Bay</u>
Reinforcing Elements/Special Features	_____
Event Dates:	Installation Date: _____ Take Down Date: _____

NOTE: THESE CALCULATIONS AND/OR DRAWINGS ARE ONLY AUTHORIZED FOR USE IF THEY HAVE BEEN REVIEWED FOR SPECIFIC SITE CONDITIONS AND HAVE A WET STAMP AND SIGNATURE IN RED INK BY A LICENSED ENGINEER WHO IS EMPLOYED BY MACKINTOSH & MACKINTOSH, INC. IF THESE CALCULATIONS AND/OR DRAWINGS ARE USED WITHOUT THE KNOWLEDGE OF MACKINTOSH & MACKINTOSH THE USER ASSUMES ALL RESPONSIBILITY AND LIABILITY FOR THEIR USE. MACKINTOSH & MACKINTOSH, INC. CANNOT MAKE ANY REPRESENTATIONS AS TO THE ACCURACY OF ANY PHOTOCOPIED DOCUMENTS WITHOUT OUR REVIEW.

Johnson/ESPAN/80/76/C/15
ENGINEER:

3888 OAKWOOD AVENUE • LOS ANGELES, CALIFORNIA 90004 • TEL: (323) 662-1184 • FAX: (323) 662-7541

Honor Robson

SHEET NO.

1 of 55

33

Mackintosh & Mackintosh, Inc.

CONSULTING STRUCTURAL ENGINEERS SINCE 1941

Job Title: 50 Foot Espan Tent Structure

Address: Various

M&M File no.: VAR-2016-0021

Date: September 2016

Client: Johnson Outdoors

Material Properties

Aluminum: 6061-T6 or equal. See "Aluminum Design Manual", 8th Edition, 2005, The Aluminum Association. Portions cited: Part I-A, Specifications for Aluminum Structures, Allowable Stress Design, and Design Aids, Pages VII-66 and VII-67.

Steel Cable: ASTM A603, Class C

Wind Loading

Calculation Method	Per ASCE 7-10, Method of Figure 27.4-1
Wind Speed, V	76 mph (3-second gust) Appendix C; Figure CC-1 10-Year MRI
Exposure	C
Mean Roof Height, h	17.0 feet
Coefficient $K_h (=K_z)$	0.85 @ Windward Wall (Table 27.3-1) 0.87 Elsewhere (Based on h = 20 ft.)
Coefficient K_d	0.85 (Table 6-6)
Velocity Pressure, q_s $= .00256K_zK_dV^2$	10.68 psf @ Windward Wall 10.93 psf Elsewhere
Roof Slope	23 degrees
Internal Pressure, GC_p	± 0.18 (Table 6-7)
h/L for Fig. 6-3	17/50 = 0.34
L/B for Fig. 6-3	Less than 1
Gust Factor, G	0.85 (Paragraph 6.5.8.1)
Beam Spacing	15 feet 0 inch

Coefficients C_p per Figure 6-3:

Windward Wall	$C_p = +0.8$
Windward Roof	$C_p = -0.32$ (Load Case #1 & #4) $C_p = +0.22$ (Load Case #2 & #5)
Leeward Roof	$C_p = -0.6$
Leeward Wall	$C_p = -0.5$
Side Walls	$C_p = -0.7$
Roof, with Wind Parallel to Ridge	$C_p = -0.75$ (Load Case #3 & #6)

* Critical frame is 2nd from windward wall: $C_p = 0.9$, per Fig. 3 applies for over region within h = 17 ft. from end wall, $C_p = 0.9$ applies beyond 17 ft. from end wall. Averaging for 2nd frame, $C_p = 0.75$.

Johnson/ESPAN/50/76/C/15
ENGINEER:

5808 OAKWOOD AVENUE • LOS ANGELES, CALIFORNIA 90004 • TEL: (323) 662-184 • FAX: (323) 662-7541

Honor Robson

SHEET NO.

2 of 5

34

Mackintosh & Mackintosh, Inc.

CONSULTING STRUCTURAL ENGINEERS SINCE 1941

Job Title: 50 Foot Espon Tent Structures

Address: Various

M&M File no.: VAR-2016-0021

Date: September 2016

Client: Johnson Outdoors

Wind Loads

Load Case #1 - C_p on windward roof acts outward; combine w/ internal pressure

Windward Wall = 48 pounds per foot inward
Windward Roof = 39 pounds per foot outward
Leeward Roof = 68 pounds per foot outward
Leeward Wall = 60 pounds per foot outward

Load Case #2 - C_p on windward roof acts inward; combine w/ internal pressure

Windward Wall = 48 pounds per foot inward
Windward Roof = 7 pounds per foot inward
Leeward Roof = 68 pounds per foot outward
Leeward Wall = 60 pounds per foot outward

Load Case #3 - Wind acting normal to frames; combine w/ internal pressure

Roof = 80 pounds per foot outward
Walls = 76 pounds per foot outward

Load Case #4 - C_p on windward roof acts outward; combine w/ internal suction

Windward Wall = 83 pounds per foot inward
Windward Roof = -4 pounds per foot outward
Leeward Roof = 32 pounds per foot outward
Leeward Wall = 24 pounds per foot outward

Load Case #5 - C_p on windward roof acts inward; combine w/ internal suction

Windward Wall = 83 pounds per foot inward
Windward Roof = 43 pounds per foot inward
Leeward Roof = 32 pounds per foot outward
Leeward Wall = 24 pounds per foot outward

Load Case #6 - Wind acting normal to End Wall:

Windward Wall = $2 (q_n C_p A) = 2 (10.93) (0.8) (195) = 3,410$ pounds inward
Leeward Wall = $2 (q_n C_p A) = 2 (10.68) (-0.5) (195) = 2,082$ pounds outward

Johnson/ESPAN/80/76/C/15
ENGINEER:

3828 OAKWOOD AVENUE • LOS ANGELES, CALIFORNIA 90004 • TEL: (323) 662-1184 • FAX: (323) 662-7541

Honor Robson

SHEET NO.

3 of 5

35

Mackintosh & Mackintosh, Inc.

CONSULTING STRUCTURAL ENGINEERS SINCE 1941

Job Title: 50 Foot Espan Tent Structure

Address: Various

M&M File no.: VAR-2016-0021

Date: September 2016

Client: Johnson Outdoors

Suspended Equipment Loads

Load Case #7 - Two Point Loads of $P = 150$ pounds

Load Case #8 - One Point Load of $P = 150$ pounds

Beam Dead Weight

Load Case #9 - Beam self-weight will be added in computer analysis

Combine Loads per Paragraph 2.4.1:

Notes: Load combination including Wind #2 & #5 are more critical using suspended equipment
Load combinations including Wind #1, #3 & #4 are more critical using $0.6D + W$

Load Combination #1	$(0.6) \text{ Wind \#1} + (0.6) \text{ Dead}$
Load Combination #2	$(0.6) \text{ Wind \#3} + (0.6) \text{ Dead}$
Load Combination #3	$(0.6) \text{ Wind \#4} + (0.6) \text{ Dead}$
Load Combination #4	$(0.6) \text{ Wind \#2} + \text{Suspended Equipment} + \text{Dead}$
Load Combination #5	$(0.6) \text{ Wind \#5} + \text{Suspended Equipment} + \text{Dead}$
Load Combination #6	$(0.6) \text{ Wind \#2} + \text{Unbalanced Suspended Equipment} + \text{Dead}$
Load Combination #7	$(0.6) \text{ Wind \#5} + \text{Unbalanced Suspended Equipment} + \text{Dead}$
Load Combination #8	$(0.6) \text{ Wind \#6} + \text{Dead Load}$
Load Combination #8	$\text{Suspended Equipment} + \text{Dead}$
Load Combination #9	$\text{Unbalanced Suspended Equipment} + \text{Dead}$

Johnson/ESPAN/50/76/C/15

ENGINEER:

3888 ORANWOOD AVENUE • LOS ANGELES, CALIFORNIA 90004 • TEL: (323) 662-1184 • FAX: (323) 662-1541

Honor Robson

SHEET NO.

4 of 5

36

Mackintosh & Mackintosh, Inc.

CONSULTING STRUCTURAL ENGINEERS SINCE 1941

Job Title: 50 Foot Espan Tent Structure


Address: Various

M&M File no.: VAR-2016-0021

Date: August 2016

Client: Johnson Outdoors

Summary of Forces to Foundation (Due to Frame Loading)

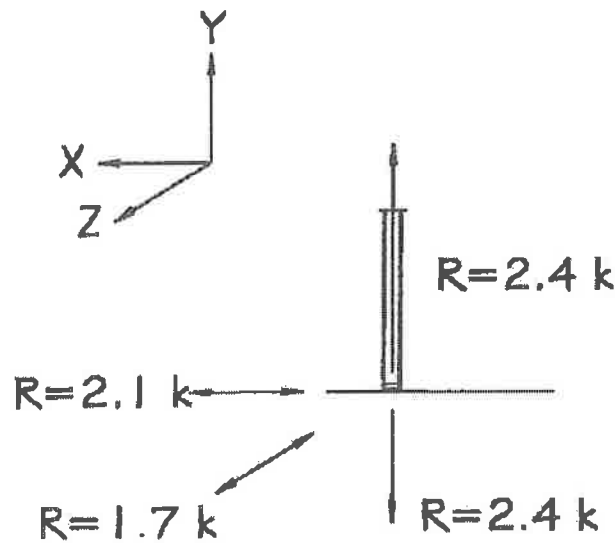

Johnson/ESPAN/50/76/C/15
ENGINEER:

3838 OAKWOOD AVENUE • LOS ANGELES, CALIFORNIA 90004 • TEL: (323) 662-1884 • FAX: (323) 662-7541

Honor Robson.

SHEET NO.

5 of 5

37

CALCULATION METHOD ASCE 7-10 FIGURE 27.4-1

V (WIND SPEED) Figure CC-1 10 Year MRI	76 3 SECOND GUST
EXPOSURE C	
h (MEAN ROOF HEIGHT)	17.00
L (WIDTH OF BUILDING)	50.00
WALL HEIGHT	10.00
BAY SPACING	15.00
K_z (WINDWARD WALL <15')	0.85 Table 27.3-1
K_z (MEAN ROOF HEIGHT approximately 15')	0.87 Elsewhere Based On h
K_b	0.85 Table 26.6
G (GUST FACTOR)	0.85 Section 26.9
GC_p (INTERNAL PRESSURE)	+/- 0.18 Table 26.11-1
VELOCITY PRESSURE (q_h & q_s)	
q_h (0.00256 $K_z K_b V^2 I$)	10.68 Equation 27.3-1
q_s (0.00256 $K_z K_b V^2 I$)	10.93 Equation 27.3-1

COEFFICIENTS C_p PER FIGURE 27.4-1

COEFFICIENTS C_p (h/L)	0.34 .25 < .34 < .5' 23 Degrees, Roof Slope
WINDWARD WALL C_p	0.80
WINDWARD ROOF C_p	-0.26 LOAD CASE 1 AND 4 0.30 LOAD CASE 2 AND 5
LEEWARD ROOF C_p	-0.60
LEEWARD WALL C_p	-0.50 L/B < 1
SIDE WALLS C_p	-0.70
ROOF WIND NORMAL TO RIDGE	-0.75 20' BAY

Load Case #1 - C_p on windward roof acts outward; combine with internal pressure

Windward Wall	P=	5.30	w=	79 ASD	w=	48
Windward Roof	P=	-4.38	w=	-66 ASD	w=	-39
Leeward Roof	P=	-7.54	w=	-113 ASD	w=	-68
Leeward Wall	P=	-6.62	w=	-99 ASD	w=	-60

Load Case #2 - C_p on windward roof acts inward; combine with internal pressure

Windward Wall	P=	5.30	w=	79 ASD	w=	48
Windward Roof	P=	0.82	w=	12 ASD	w=	7
Leeward Roof	P=	-7.54	w=	-113 ASD	w=	-68
Leeward Wall	P=	-6.62	w=	-99 ASD	w=	-60

Load Case #3 - Wind acting normal to frames; combine with internal pressure

Roof	P=	-8.94	w=	-134 ASD	w=	-80
Walls	P=	-8.47	w=	-127 ASD	w=	-76

Load Case #4 - C_p on windward roof acts outward; combine with internal suction



Windward Wall	P=	9.23	w=	138 ASD	w=	83
Windward Roof	P=	-0.45	w=	-7 ASD	w=	-4
Leeward Roof	P=	-3.61	w=	-54 ASD	w=	-32
Leeward Wall	P=	-2.68	w=	-40 ASD	w=	-24

Load Case #5 - C_p on windward roof acts inward; combine with internal suction

Windward Wall	P=	9.23	w=	138 ASD	w=	83
Windward Roof	P=	4.76	w=	71 ASD	w=	43
Leeward Roof	P=	-3.61	w=	-54 ASD	w=	-32
Leeward Wall	P=	-2.68	w=	-40 ASD	w=	-24

Load Case #6 - Wind acting normal to frames; combine with internal suction

Roof	P=	-5.00	w=	-75 ASD	w=	-45
Walls	P=	-4.54	w=	-68 ASD	w=	-41

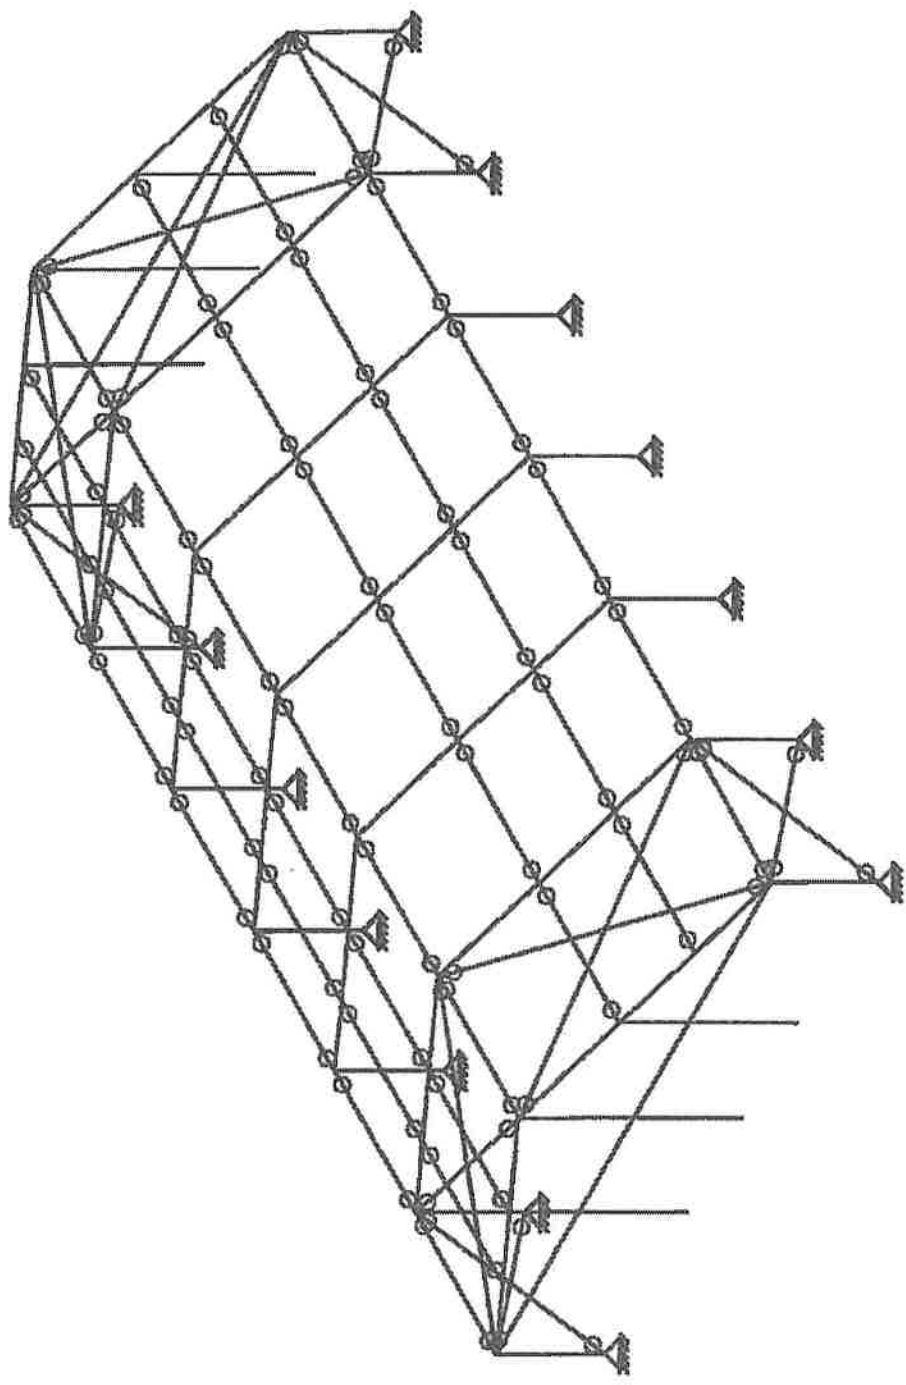

Mackintosh & Mackintosh, Inc.

H Robson

2016-0021

ESPAN 60'x60'

SK - 1

Aug 22, 2016 at 7:01 PM

2016-0021 ESPAN 60x60.rvt

40

7a



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2018-0021
 Model Name : ESPAN 50x90'

Aug 22, 2018
 6:27 PM
 Checked By: _____

(Global) Model Settings

Display Sections for Member Calcs	5
Max Internal Sections for Member Calcs	97
Include Shear Deformation?	Yes
Increase Nailing Capacity for Wind?	Yes
Include Warping?	Yes
Trans Load Btwn Intersecting Wood Wall?	Yes
Area Load Mesh (in ²)	144
Merge Tolerance (in)	.12
P-Delta Analysis Tolerance	0.50%
Include P-Delta for Walls?	Yes
Automatically Iterate Stiffness for Walls?	Yes
Max Iterations for Wall Stiffness	3
Gravity Acceleration (ft/sec ²)	32.2
Wall Mesh Size (in)	24
Eigensolution Convergence Tol. (1.E-)	4
Vertical Axis	Y
Global Member Orientation Plane	XZ
Static Solver	Sparse Accelerated
Dynamic Solver	Accelerated Solver

Hot Rolled Steel Code	AISC 14th(360-10): ASD
Adjust Stiffness?	Yes (Iterative)
RISA Connection Code	AISC 14th(360-10): ASD
Cold Formed Steel Code	AISI S100-12: ASD
Wood Code	AWC NDS-15: ASD
Wood Temperature	< 100F
Concrete Code	ACI 318-14
Masonry Code	ACI 530-13: ASD
Aluminum Code	AA ADM1-10: ASD - Building

Number of Shear Regions	4
Region Spacing Increment (in)	4
Biaxial Column Method	Exact Integration
Parris Beta Factor (PCA)	.85
Concrete Stress Block	Rectangular
Use Cracked Sections?	Yes
Use Cracked Sections Slab?	Yes
Bad Framing Warnings?	No
Unused Force Warnings?	Yes
Min 1 Bar Diam. Spacing?	No
Concrete Rebar Set	REBAR SET ASTMA615
Min % Steel for Column	1
Max % Steel for Column	8

(Global) Model Settings. Continued

Seismic Code	ASCE 7-10
Seismic Base Elevation (ft)	Not Entered
Add Base Weight?	Yes
Ct X	.02
Ct Z	.02
T X (sec)	Not Entered
T Z (sec)	Not Entered
R X	3
R Z	3
Ct Exp. X	.75
Ct Exp. Z	.75
SD1	1
SDS	1
S1	1
TL (sec)	5
Risk Cat	I or II
Om Z	1
Om X	1
Rho Z	1
Rho X	1
Footing Overturning Safety Factor	1
Optimize for OTM/Sliding	No
Check Concrete Bearing	No
Footing Concrete Weight (lb/in ³)	.08
Footing Concrete fc (psi)	4000
Footing Concrete Ec (psi)	3.644e+6
Lambda	1
Footing Steel fy (psi)	60000
Minimum Steel	0.0018
Maximum Steel	0.0075
Footing Top Bar	#8
Footing Top Bar Cover (in)	1.5
Footing Bottom Bar	#6
Footing Bottom Bar Cover (in)	3
Pedestal Bar	#8
Pedestal Bar Cover (in)	1.5
Pedestal Ties	#4

Hot Rolled Steel Properties

	Label	E (psi)	G (psi)	Nu	Therm (1/E, Density)(lb/ft ³)	Yield (psi)	Ry	Fu (psi)	Rt
1	A992	2.9e+7	1.115e+7	.3	.65 .28	50000	1.1	65000	1.1
2	A36 Gr.36	2.9e+7	1.115e+7	.3	.65 .28	36000	1.6	58000	1.2
3	A572 Gr.50	2.9e+7	1.115e+7	.3	.65 .28	50000	1.1	65000	1.1
4	A500 Gr.B RND	2.9e+7	1.115e+7	.3	.65 .3	42000	1.4	59000	1.3
5	A800 Gr.B Rect	2.9e+7	1.115e+7	.3	.65 .3	48000	1.4	58000	1.3
6	A53 Gr.B	2.9e+7	1.115e+7	.3	.65 .28	35000	1.6	60000	1.2
7	A1085	2.9e+7	1.115e+7	.3	.65 .28	50000	1.4	65000	1.3

Aluminum Properties

	Label	E (psi)	G (psi)	Nu	Therm (1/E, Density)(lb/ft ³)	Table B.4	kt	Fu (psi)	Fy (psi)	Fcy (psi)	Fau (psi)	Ct
1	3003-H14	1.01e+7	3.788e+6	.33	1.3 .1	Table B.4	1	19000	16000	13000	12000	141
2	6061-T6	1.01e+7	3.788e+6	.33	1.3 .1	Table B.4	1	38000	35000	35000	24000	141
3	6063-T5	1.01e+7	3.788e+6	.33	1.3 .1	Table B.4	1	22000	16000	16000	13000	141
4	6063-T6	1.01e+7	3.788e+6	.33	1.3 .1	Table B.4	1	30000	25000	25000	19000	141

42



Company : Meckintosh & Meckintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90

Aug 22, 2016
 6:27 PM
 Checked By: _____

Aluminum Properties (Continued)

	Label	E [psi]	G [psi]	Nu	Therm C...	Density [lb/in^3]	Table B.4	kt	F _u [psi]	F _y [psi]	F _o [psi]	F _u [psi]	Ct
5	6062-H34	1.02e+7	3.788e+6	.33	1.3	.1	Table B...	1	34000	26000	24000	20000	141
6	6061-T6 W	1.01e+7	3.788e+6	.33	1.3	.1	Table B...	1	24000	16000	15000	15000	141

General Material Properties

	Label	E [psi]	G [psi]	Nu	Therm (1E5 F)	Density [lb/in^3]
1	gen Conc3NW	3.155e+6	1.372e+6	.15	.6	.08
2	gen Conc4NW	3.644e+6	1.604e+6	.16	.6	.08
3	gen Conc3LW	2.085e+6	9.08e+5	.15	.6	.06
4	gen Conc4LW	2.408e+6	1.047e+6	.15	.6	.06
5	gen Alum	1.06e+7	4.077e+6	.3	1.29	.1
6	gen Steel	2.9e+7	1.115e+7	.3	.65	.28
7	RIGID	1e+9		.3	0	0

Hot Rolled Steel Section Sets

	Label	Shape	Type	Design List	Material	Design Rules	A [in^2]	I _y [in^4]	I _z [in^4]	J [in^4]
1	HR1A	W8x10	Beam	Wide Flange	A992	Typical	2.96	2.09	30.8	.04

Aluminum Section Sets

	Label	Shape	Type	Design List	Material	Design Rules	A [in^2]	I _y [in^4]	I _z [in^4]	J [in^4]
1	AL1A	AAC814X13.6	Beam	AA Channel	3003-H14	Typical	11.8	44.7	401	1.19

General Section Sets

	Label	Shape	Type	Material	A [in^2]	I _y [in^4]	I _z [in^4]	J [in^4]
1	ESPAN		Beam	gen Alum	3.47	21.29	21.29	36.77
2	Purlin		Beam	gen Alum	.83	.6	.67	2.76

Joint Coordinates and Temperatures

	Label	X [ft]	Y [ft]	Z [ft]	Temp [F]	Detach From Disp...
1	N1	50	0	0	0	
2	N2	50	10	0	0	
3	N3	42.5	13.18	0	0	
4	N4	35	16.37	0	0	
5	N5	25.49	20.4	0	0	
6	N6	25.33	20.46	0	0	
7	N7	25.17	20.49	0	0	
8	N8	25	20.5	0	0	
9	N9	24.83	20.49	0	0	
10	N10	24.67	20.46	0	0	
11	N11	24.51	20.4	0	0	
12	N12	15	16.37	0	0	
13	N13	7.5	13.18	0	0	
14	N14	0	10	0	0	
15	N15	0	0	0	0	
16	N16	35	0	0	0	
17	N17	35	10	0	0	
18	N18	25	0	0	0	
19	N19	25	10	0	0	
20	N20	15	0	0	0	
21	N21	15	10	0	0	

10
43



Company : MacIntosh & MeckIntosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90

Aug 22, 2016
 6:27 PM
 Checked By: _____

Joint Coordinates and Temperatures (Continued)

	Label	X (m)	Y (m)	Z (m)	Temp (F)	Detach From Disp...
22	N22	50	0	15	0	
23	N23	50	10	15	0	
24	N24	42.5	13.18	15	0	
25	N25	35	16.37	15	0	
26	N26	25.49	20.4	15	0	
27	N27	25.33	20.46	15	0	
28	N28	25.17	20.49	15	0	
29	N29	25	20.5	15	0	
30	N30	24.89	20.49	15	0	
31	N31	24.67	20.46	15	0	
32	N32	24.51	20.4	15	0	
33	N33	15	16.37	15	0	
34	N34	7.5	13.18	15	0	
35	N35	0	10	15	0	
36	N36	0	0	15	0	
37	N37	50	0	30	0	
38	N38	50	10	30	0	
39	N39	42.5	13.18	30	0	
40	N40	35	16.37	30	0	
41	N41	25.49	20.4	30	0	
42	N42	25.33	20.46	30	0	
43	N43	25.17	20.49	30	0	
44	N44	25	20.5	30	0	
45	N45	24.83	20.49	30	0	
46	N46	24.67	20.46	30	0	
47	N47	24.51	20.4	30	0	
48	N48	15	16.37	30	0	
49	N49	7.5	13.18	30	0	
50	N50	0	10	30	0	
51	N51	0	0	30	0	
52	N52	50	0	45	0	
53	N53	50	10	45	0	
54	N54	42.5	13.18	45	0	
55	N55	35	16.37	45	0	
56	N56	25.49	20.4	45	0	
57	N57	25.33	20.46	45	0	
58	N58	25.17	20.49	45	0	
59	N59	25	20.5	45	0	
60	N60	24.83	20.49	45	0	
61	N61	24.67	20.46	45	0	
62	N62	24.51	20.4	45	0	
63	N63	15	16.37	45	0	
64	N64	7.5	13.18	45	0	
65	N65	0	10	45	0	
66	N66	0	0	45	0	
67	N67	50	0	60	0	
68	N68	50	10	60	0	
69	N69	42.5	13.18	60	0	
70	N70	35	16.37	60	0	
71	N71	25.49	20.4	60	0	
72	N72	25.33	20.46	60	0	
73	N73	25.17	20.49	60	0	
74	N74	25	20.5	60	0	
75	N75	24.83	20.49	60	0	
76	N76	24.67	20.46	60	0	
77	N77	24.51	20.4	60	0	
78	N78	15	16.37	60	0	

44



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90'

Aug 22, 2016
 6:27 PM
 Checked By: _____

Joint Coordinates and Temperatures (Continued)

	Label	X (ft)	Y (ft)	Z (ft)	Temp (F)	Detach From Disp.
79	N79	7.5	13.18	60	0	
80	N80	0	10	60	0	
81	N81	0	0	60	0	
82	N82	60	0	75	0	
83	N83	60	10	75	0	
84	N84	42.5	13.18	75	0	
85	N85	35	16.37	75	0	
86	N86	25.49	20.4	75	0	
87	N87	25.33	20.46	75	0	
88	N88	25.17	20.49	75	0	
89	N89	25	20.5	75	0	
90	N90	24.83	20.49	75	0	
91	N91	24.67	20.46	75	0	
92	N92	24.51	20.4	75	0	
93	N93	15	16.37	75	0	
94	N94	7.5	13.18	75	0	
95	N95	0	10	75	0	
96	N96	0	0	75	0	
97	N97	60	0	90	0	
98	N98	60	10	90	0	
99	N99	42.5	13.18	90	0	
100	N100	35	16.37	90	0	
101	N101	25.49	20.4	90	0	
102	N102	25.33	20.46	90	0	
103	N103	25.17	20.49	90	0	
104	N104	25	20.5	90	0	
105	N105	24.83	20.49	90	0	
106	N106	24.67	20.46	90	0	
107	N107	24.51	20.4	90	0	
108	N108	15	16.37	90	0	
109	N109	7.5	13.18	90	0	
110	N110	0	10	90	0	
111	N111	0	0	90	0	
112	N112	35	0	90	0	
113	N113	35	10	90	0	
114	N114	25	0	90	0	
115	N115	25	10	90	0	
116	N116	15	0	90	0	
117	N117	15	10	90	0	

Joint Boundary Conditions

	Joint Label	X (k/in)	Y (k/in)	Z (k/in)	X Rot (k-ft/rad)	Y Rot (k-ft/rad)	Z Rot (k-ft/rad)
1	N15	Reaction	Reaction	Reaction			
2	N1	Reaction	Reaction	Reaction			
3	N22	Reaction	Reaction	Reaction			
4	N36	Reaction	Reaction	Reaction			
5	N37	Reaction	Reaction	Reaction			
6	N51	Reaction	Reaction	Reaction			
7	N52	Reaction	Reaction	Reaction			
8	N66	Reaction	Reaction	Reaction			
9	N67	Reaction	Reaction	Reaction			
10	N81	Reaction	Reaction	Reaction			
11	N82	Reaction	Reaction	Reaction			
12	N86	Reaction	Reaction	Reaction			
13	N97	Reaction	Reaction	Reaction			

12
45



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x80

Aug 22, 2016
 8:27 PM
 Checked By: _____

Joint Boundary Conditions (Continued)

Joint Label	X (k/in)	Y (k/in)	Z (k/in)	X Rot (k-in/rad)	Y Rot (k-in/rad)	Z Rot (k-in/rad)
14	N111	Reaction	Reaction	Reaction		

Member Primary Data

Label	I Joint	J Joint	K Joint	Rotate(deg)	SectionShape	Type	Design List	Material	Design Rule
1	M1	N1	N2		ESPAN	Beam	None	gen Alum	DR1
2	M2	N2	N6		ESPAN	Beam	None	gen Alum	DR1
3	M3	N8	N5		ESPAN	Beam	None	gen Alum	DR1
4	M4	N7	N8		ESPAN	Beam	None	gen Alum	DR1
5	M5	N8	N7		ESPAN	Beam	None	gen Alum	DR1
6	M6	N9	N8		ESPAN	Beam	None	gen Alum	DR1
7	M7	N10	N9		ESPAN	Beam	None	gen Alum	DR1
8	M8	N11	N10		ESPAN	Beam	None	gen Alum	DR1
9	M9	N14	N11		ESPAN	Beam	None	gen Alum	DR1
10	M10	N15	N14		ESPAN	Beam	None	gen Alum	DR1
11	M11	N16	N4		ESPAN	Beam	None	gen Alum	DR1
12	M12	N18	N8		ESPAN	Beam	None	gen Alum	DR1
13	M13	N20	N12		ESPAN	Beam	None	gen Alum	DR1
14	M14	N17	N2		ESPAN	Beam	None	gen Alum	DR1
15	M15	N19	N17		ESPAN	Beam	None	gen Alum	DR1
16	M16	N21	N19		ESPAN	Beam	None	gen Alum	DR1
17	M17	N14	N21		ESPAN	Beam	None	gen Alum	DR1
18	M18	N22	N23		ESPAN	Beam	None	gen Alum	DR1
19	M19	N23	N28		ESPAN	Beam	None	gen Alum	DR1
20	M20	N27	N28		ESPAN	Beam	None	gen Alum	DR1
21	M21	N28	N27		ESPAN	Beam	None	gen Alum	DR1
22	M22	N29	N28		ESPAN	Beam	None	gen Alum	DR1
23	M23	N30	N29		ESPAN	Beam	None	gen Alum	DR1
24	M24	N31	N30		ESPAN	Beam	None	gen Alum	DR1
25	M25	N32	N31		ESPAN	Beam	None	gen Alum	DR1
26	M26	N35	N32		ESPAN	Beam	None	gen Alum	DR1
27	M27	N36	N35		ESPAN	Beam	None	gen Alum	DR1
28	M28	N37	N38		ESPAN	Beam	None	gen Alum	DR1
29	M29	N38	N41		ESPAN	Beam	None	gen Alum	DR1
30	M30	N42	N41		ESPAN	Beam	None	gen Alum	DR1
31	M31	N43	N42		ESPAN	Beam	None	gen Alum	DR1
32	M32	N44	N43		ESPAN	Beam	None	gen Alum	DR1
33	M33	N45	N44		ESPAN	Beam	None	gen Alum	DR1
34	M34	N48	N48		ESPAN	Beam	None	gen Alum	DR1
35	M35	N47	N48		ESPAN	Beam	None	gen Alum	DR1
36	M36	N50	N47		ESPAN	Beam	None	gen Alum	DR1
37	M37	N51	N50		ESPAN	Beam	None	gen Alum	DR1
38	M38	N52	N53		ESPAN	Beam	None	gen Alum	DR1
39	M39	N53	N58		ESPAN	Beam	None	gen Alum	DR1
40	M40	N57	N58		ESPAN	Beam	None	gen Alum	DR1
41	M41	N58	N57		ESPAN	Beam	None	gen Alum	DR1
42	M42	N59	N58		ESPAN	Beam	None	gen Alum	DR1
43	M43	N60	N59		ESPAN	Beam	None	gen Alum	DR1
44	M44	N61	N60		ESPAN	Beam	None	gen Alum	DR1
45	M45	N82	N81		ESPAN	Beam	None	gen Alum	DR1
46	M46	N85	N82		ESPAN	Beam	None	gen Alum	DR1
47	M47	N86	N85		ESPAN	Beam	None	gen Alum	DR1
48	M48	N87	N86		ESPAN	Beam	None	gen Alum	DR1
49	M49	N88	N71		ESPAN	Beam	None	gen Alum	DR1
50	M50	N72	N71		ESPAN	Beam	None	gen Alum	DR1
51	M51	N73	N72		ESPAN	Beam	None	gen Alum	DR1

13
46



Company : Macintosh & Macintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 60x90

Aug 22, 2016
 8:27 PM
 Checked By: _____

Member Primary Data (Continued)

	Label	I Joint	J Joint	K Joint	Rotate(deg)	Section/Shape	Type	Design List	Material	Design Rules
52	M52	N74	N73			ESPAN	Beam	None	gen Alum	DR1
53	M53	N75	N74			ESPAN	Beam	None	gen Alum	DR1
54	M54	N76	N75			ESPAN	Beam	None	gen Alum	DR1
55	M55	N77	N76			ESPAN	Beam	None	gen Alum	DR1
56	M56	N78	N77			ESPAN	Beam	None	gen Alum	DR1
57	M57	N81	N80			ESPAN	Beam	None	gen Alum	DR1
58	M58	N82	N83			ESPAN	Beam	None	gen Alum	DR1
59	M59	N83	N88			ESPAN	Beam	None	gen Alum	DR1
60	M60	N87	N86			ESPAN	Beam	None	gen Alum	DR1
61	M61	N88	N87			ESPAN	Beam	None	gen Alum	DR1
62	M62	N89	N88			ESPAN	Beam	None	gen Alum	DR1
63	M63	N90	N89			ESPAN	Beam	None	gen Alum	DR1
64	M64	N91	N90			ESPAN	Beam	None	gen Alum	DR1
65	M65	N92	N91			ESPAN	Beam	None	gen Alum	DR1
66	M66	N95	N92			ESPAN	Beam	None	gen Alum	DR1
67	M67	N98	N95			ESPAN	Beam	None	gen Alum	DR1
68	M68	N97	N98			ESPAN	Beam	None	gen Alum	DR1
69	M69	N98	N101			ESPAN	Beam	None	gen Alum	DR1
70	M70	N102	N101			ESPAN	Beam	None	gen Alum	DR1
71	M71	N103	N102			ESPAN	Beam	None	gen Alum	DR1
72	M72	N104	N103			ESPAN	Beam	None	gen Alum	DR1
73	M73	N106	N104			ESPAN	Beam	None	gen Alum	DR1
74	M74	N106	N105			ESPAN	Beam	None	gen Alum	DR1
75	M75	N107	N106			ESPAN	Beam	None	gen Alum	DR1
76	M76	N110	N107			ESPAN	Beam	None	gen Alum	DR1
77	M77	N111	N110			ESPAN	Beam	None	gen Alum	DR1
78	M78	N112	N109			ESPAN	Beam	None	gen Alum	DR1
79	M79	N114	N104			ESPAN	Beam	None	gen Alum	DR1
80	M80	N116	N108			ESPAN	Beam	None	gen Alum	DR1
81	M81	N113	N98			ESPAN	Beam	None	gen Alum	DR1
82	M82	N115	N113			ESPAN	Beam	None	gen Alum	DR1
83	M83	N117	N116			ESPAN	Beam	None	gen Alum	DR1
84	M84	N110	N117			ESPAN	Beam	None	gen Alum	DR1
85	M85	N2	N23			Purlin	Beam	None	gen Alum	DR1
86	M86	N23	N38			Purlin	Beam	None	gen Alum	DR1
87	M87	N38	N53			Purlin	Beam	None	gen Alum	DR1
88	M88	N53	N68			Purlin	Beam	None	gen Alum	DR1
89	M89	N68	N83			Purlin	Beam	None	gen Alum	DR1
90	M90	N83	N98			Purlin	Beam	None	gen Alum	DR1
91	M91	N3	N24			Purlin	Beam	None	gen Alum	DR1
92	M92	N24	N39			Purlin	Beam	None	gen Alum	DR1
93	M93	N39	N54			Purlin	Beam	None	gen Alum	DR1
94	M94	N54	N69			Purlin	Beam	None	gen Alum	DR1
95	M95	N69	N84			Purlin	Beam	None	gen Alum	DR1
96	M96	N84	N89			Purlin	Beam	None	gen Alum	DR1
97	M97	N4	N25			Purlin	Beam	None	gen Alum	DR1
98	M98	N25	N40			Purlin	Beam	None	gen Alum	DR1
99	M99	N40	N65			Purlin	Beam	None	gen Alum	DR1
100	M100	N65	N70			Purlin	Beam	None	gen Alum	DR1
101	M101	N70	N85			Purlin	Beam	None	gen Alum	DR1
102	M102	N85	N100			Purlin	Beam	None	gen Alum	DR1
103	M103	N8	N29			Purlin	Beam	None	gen Alum	DR1
104	M104	N29	N44			Purlin	Beam	None	gen Alum	DR1
105	M105	N44	N59			Purlin	Beam	None	gen Alum	DR1
106	M106	N59	N74			Purlin	Beam	None	gen Alum	DR1
107	M107	N74	N89			Purlin	Beam	None	gen Alum	DR1
108	M108	N89	N104			Purlin	Beam	None	gen Alum	DR1

47

Member Primary Data (Continued)

	Label	I.Joint	J.Joint	K.Joint	Rotate(deg)	Section/Shape	Type	Design List	Material	Design Rules
109	M109	N12	N33			Purlin	Beam	None	gen Alum	DR1
110	M110	N33	N48			Purlin	Beam	None	gen Alum	DR1
111	M111	N48	N63			Purlin	Beam	None	gen Alum	DR1
112	M112	N63	N78			Purlin	Beam	None	gen Alum	DR1
113	M113	N78	N93			Purlin	Beam	None	gen Alum	DR1
114	M114	N93	N108			Purlin	Beam	None	gen Alum	DR1
115	M115	N13	N24			Purlin	Beam	None	gen Alum	DR1
116	M116	N34	N49			Purlin	Beam	None	gen Alum	DR1
117	M117	N49	N64			Purlin	Beam	None	gen Alum	DR1
118	M118	N64	N79			Purlin	Beam	None	gen Alum	DR1
119	M119	N79	N94			Purlin	Beam	None	gen Alum	DR1
120	M120	N94	N109			Purlin	Beam	None	gen Alum	DR1
121	M121	N14	N35			Purlin	Beam	None	gen Alum	DR1
122	M122	N35	N50			Purlin	Beam	None	gen Alum	DR1
123	M123	N50	N65			Purlin	Beam	None	gen Alum	DR1
124	M124	N65	N80			Purlin	Beam	None	gen Alum	DR1
125	M125	N80	N95			Purlin	Beam	None	gen Alum	DR1
126	M126	N95	N110			Purlin	Beam	None	gen Alum	DR1
127	M127	N1	N23			1/4 Wire Rope	None	None	A1085	Typical
128	M128	N22	N2			1/4 Wire Rope	None	None	A1085	Typical
129	M129	N23	N8			1/4 Wire Rope	None	None	A1085	Typical
130	M130	N2	N29			1/4 Wire Rope	None	None	A1085	Typical
131	M131	N15	N36			1/4 Wire Rope	None	None	A1085	Typical
132	M132	N36	N14			1/4 Wire Rope	None	None	A1085	Typical
133	M133	N35	N8			1/4 Wire Rope	None	None	A1085	Typical
134	M134	N14	N29			1/4 Wire Rope	None	None	A1085	Typical
135	M135	N82	N98			1/4 Wire Rope	None	None	A1085	Typical
136	M136	N97	N83			1/4 Wire Rope	None	None	A1085	Typical
137	M137	N98	N89			1/4 Wire Rope	None	None	A1085	Typical
138	M138	N83	N104			1/4 Wire Rope	None	None	A1085	Typical
139	M139	N111	N95			1/4 Wire Rope	None	None	A1085	Typical
140	M140	N95	N110			1/4 Wire Rope	None	None	A1085	Typical
141	M141	N95	N104			1/4 Wire Rope	None	None	A1085	Typical
142	M142	N110	N89			1/4 Wire Rope	None	None	A1085	Typical

Joint Loads and Enforced Displacements (BLC 6 : Wind #6)

	Joint Label	L.D.M	Direction	Magnitude((lb.-ft) (in.rad) (lb's*2)
1	N14	L	Z	487
2	N13	L	Z	487
3	N12	L	Z	487
4	N8	L	Z	487
5	N4	L	Z	487
6	N3	L	Z	487
7	N2	L	Z	487
8	N110	L	Z	297
9	N109	L	Z	297
10	N108	L	Z	297
11	N104	L	Z	297
12	N100	L	Z	287
13	N98	L	Z	297
14	N98	L	Z	297

Joint Loads and Enforced Displacements (BLC 6 : Suspended Equipment)

	Joint Label	L.D.M	Direction	Magnitude((lb.-ft) (in.rad) (lb's*2)
1	N4	L	Y	-150



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90'

Aug 22, 2016
 8:27 PM
 Checked By: _____

Joint Loads and Enforced Displacements (BLC 8 : Suspended Equipment) (Continued)

	Joint Label	L.D.M	Direction	Magnitude(lb.lb-ft), (in.rad), (lb*s^2)
2	N12	L	Y	-150
3	N25	L	Y	-150
4	N33	L	Y	-150
5	N40	L	Y	-150
6	N48	L	Y	-150
7	N55	L	Y	-150
8	N63	L	Y	-150
9	N70	L	Y	-150
10	N78	L	Y	-150
11	N85	L	Y	-150
12	N93	L	Y	-150
13	N100	L	Y	-150
14	N108	L	Y	-150

Joint Loads and Enforced Displacements (BLC 9 : Unbalanced Suspended Equipment)

	Joint Label	L.D.M	Direction	Magnitude(lb.lb-ft), (in.rad), (lb*s^2)
1	N12	L	Y	-150
2	N33	L	Y	-150
3	N48	L	Y	-150
4	N63	L	Y	-150
5	N78	L	Y	-150
6	N93	L	Y	-150
7	N108	L	Y	-150

Member Distributed Loads (BLC 1 : Wind #1)

	Member Label	Direction	Start Magnitude(lb/ft.F)	End Magnitude(lb/ft.F)	Start Location(R.%)	End Location(R.%)
1	M1	v	24	24	0	0
2	M2	v	19.5	19.5	0	0
3	M3	v	19.5	19.5	0	0
4	M4	v	19.5	19.5	0	0
5	M5	v	19.5	19.5	0	0
6	M6	y	34	34	0	0
7	M7	v	34	34	0	0
8	M8	y	34	34	0	0
9	M9	v	34	34	0	0
10	M10	y	30	30	0	0
11	M18	y	48	48	0	0
12	M19	y	39	39	0	0
13	M20	v	39	39	0	0
14	M21	y	39	39	0	0
15	M22	v	39	39	0	0
16	M23	y	68	68	0	0
17	M24	v	68	68	0	0
18	M25	y	68	68	0	0
19	M26	v	68	68	0	0
20	M27	y	60	60	0	0
21	M28	v	48	48	0	0
22	M29	y	39	39	0	0
23	M30	v	39	39	0	0
24	M31	y	39	39	0	0
25	M32	v	39	39	0	0
26	M33	y	68	68	0	0
27	M34	v	68	68	0	0
28	M35	y	68	68	0	0
29	M36	y	68	68	0	0

49



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2018-0021
 Model Name : ESPAN 50x80

Aug 22, 2016
 6:27 PM
 Checked By: _____

Member Distributed Loads (BLC 1 : Wind #1) (Continued)

	Member Label	Direction	Start Magnitude(lb/ft.F)	End Magnitude(lb/ft.F)	Start Location(ft.%)	End Location(ft.%)
30	M37	v	60	60	0	0
31	M38	v	48	48	0	0
32	M39	v	39	39	0	0
33	M40	v	39	39	0	0
34	M41	v	39	39	0	0
35	M42	v	39	39	0	0
36	M43	v	68	68	0	0
37	M44	v	68	68	0	0
38	M45	v	68	68	0	0
39	M46	v	68	68	0	0
40	M47	v	60	60	0	0
41	M48	v	48	48	0	0
42	M49	v	39	39	0	0
43	M50	v	39	39	0	0
44	M51	v	39	39	0	0
45	M52	v	39	39	0	0
46	M53	v	68	68	0	0
47	M54	v	68	68	0	0
48	M55	v	68	68	0	0
49	M56	v	68	68	0	0
50	M57	v	60	60	0	0
51	M58	v	48	48	0	0
52	M59	v	39	39	0	0
53	M60	v	39	39	0	0
54	M61	v	39	39	0	0
55	M62	v	39	39	0	0
56	M63	v	68	68	0	0
57	M64	v	68	68	0	0
58	M65	v	68	68	0	0
59	M66	v	68	68	0	0
60	M67	v	60	60	0	0
61	M68	v	24	24	0	0
62	M69	v	19.5	19.5	0	0
63	M70	v	19.5	19.5	0	0
64	M71	v	19.5	19.5	0	0
65	M72	v	19.5	19.5	0	0
66	M73	v	34	34	0	0
67	M74	v	34	34	0	0
68	M75	v	34	34	0	0
69	M76	v	34	34	0	0
70	M77	v	30	30	0	0

Member Distributed Loads (BLC 2 : Wind #2)

	Member Label	Direction	Start Magnitude(lb/ft.F)	End Magnitude(lb/ft.F)	Start Location(ft.%)	End Location(ft.%)
1	M1	v	48	48	0	0
2	M2	v	-7	-7	0	0
3	M3	v	-7	-7	0	0
4	M4	v	-7	-7	0	0
5	M5	v	-7	-7	0	0
6	M6	v	68	68	0	0
7	M7	v	68	68	0	0
8	M8	v	68	68	0	0
9	M9	v	68	68	0	0
10	M10	v	60	60	0	0
11	M18	v	48	48	0	0
12	M19	v	-7	-7	0	0

17 50



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90'

Aug 22, 2016
 6:37 PM
 Checked By: _____

Member Distributed Loads (BLC 2 : Wind #2) (Continued)

	Member Label	Direction	Start Magnitude(lb/ft.F)	End Magnitude(lb/ft.F)	Start Location(ft.%)	End Location(ft.%)
13	M20	v	-7	-7	0	0
14	M21	y	-7	-7	0	0
15	M22	v	-7	-7	0	0
16	M23	v	68	68	0	0
17	M24	v	68	68	0	0
18	M25	y	68	68	0	0
19	M26	v	68	68	0	0
20	M27	y	60	60	0	0
21	M28	v	48	48	0	0
22	M29	v	-7	-7	0	0
23	M30	v	-7	-7	0	0
24	M31	v	-7	-7	0	0
25	M32	v	-7	-7	0	0
26	M33	y	68	68	0	0
27	M34	v	68	68	0	0
28	M35	y	68	68	0	0
29	M36	v	68	68	0	0
30	M37	y	60	60	0	0
31	M38	v	48	48	0	0
32	M39	v	-7	-7	0	0
33	M40	v	-7	-7	0	0
34	M41	v	-7	-7	0	0
35	M42	v	-7	-7	0	0
36	M43	v	68	68	0	0
37	M44	y	68	68	0	0
38	M45	v	68	68	0	0
39	M46	v	68	68	0	0
40	M47	y	60	60	0	0
41	M48	v	48	48	0	0
42	M49	v	-7	-7	0	0
43	M50	v	-7	-7	0	0
44	M51	v	-7	-7	0	0
45	M52	v	-7	-7	0	0
46	M53	y	68	68	0	0
47	M54	v	68	68	0	0
48	M55	v	68	68	0	0
49	M56	v	68	68	0	0
50	M57	v	60	60	0	0
51	M58	v	48	48	0	0
52	M59	v	-7	-7	0	0
53	M60	v	-7	-7	0	0
54	M61	v	-7	-7	0	0
55	M62	v	-7	-7	0	0
56	M63	v	68	68	0	0
57	M64	v	68	68	0	0
58	M65	v	68	68	0	0
59	M66	v	68	68	0	0
60	M67	v	60	60	0	0
61	M68	v	48	48	0	0
62	M69	v	-7	-7	0	0
63	M70	v	-7	-7	0	0
64	M71	v	-7	-7	0	0
65	M72	v	-7	-7	0	0
66	M73	y	68	68	0	0
67	M74	v	68	68	0	0
68	M75	v	68	68	0	0
69	M76	v	68	68	0	0



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90'

Aug 22, 2016
 6:27 PM
 Checked By: _____

Member Distributed Loads (BLC 2 : Wind #2) (Continued)

Member Label	Direction	Start Magnitude(lb/ft.F)	End Magnitude(lb/ft.F)	Start Location(ft.%)	End Location(ft.%)	
70	M77	y	80	60	0	0

Member Distributed Loads (BLC 3 : Wind #3)

Member Label	Direction	Start Magnitude(lb/ft.F)	End Magnitude(lb/ft.F)	Start Location(ft.%)	End Location(ft.%)	
1	M1	v	-76	-76	0	0
2	M2	v	80	80	0	0
3	M3	v	80	80	0	0
4	M4	v	80	80	0	0
5	M5	v	80	80	0	0
6	M6	v	80	80	0	0
7	M7	v	80	80	0	0
8	M8	v	80	80	0	0
9	M9	v	80	80	0	0
10	M10	v	80	80	0	0
11	M11	v	80	80	0	0
12	M12	v	80	80	0	0
13	M13	v	80	80	0	0
14	M14	v	80	80	0	0
15	M15	v	80	80	0	0
16	M16	v	80	80	0	0
17	M17	v	80	80	0	0
18	M18	v	80	80	0	0
19	M19	v	80	80	0	0
20	M20	v	80	80	0	0
21	M21	y	80	80	0	0
22	M22	v	80	80	0	0
23	M23	v	80	80	0	0
24	M24	v	80	80	0	0
25	M25	v	80	80	0	0
26	M26	v	80	80	0	0
27	M27	y	80	80	0	0
28	M28	v	80	80	0	0
29	M29	v	80	80	0	0
30	M30	v	80	80	0	0
31	M31	y	80	80	0	0
32	M32	v	80	80	0	0
33	M33	y	80	80	0	0
34	M34	v	80	80	0	0
35	M35	v	80	80	0	0
36	M36	v	80	80	0	0
37	M37	y	80	80	0	0
38	M38	v	80	80	0	0
39	M39	v	80	80	0	0
40	M40	v	80	80	0	0
41	M41	y	80	80	0	0
42	M42	v	80	80	0	0
43	M43	v	80	80	0	0
44	M44	v	80	80	0	0
45	M45	y	80	80	0	0
46	M46	v	80	80	0	0
47	M47	v	80	80	0	0
48	M48	y	80	80	0	0
49	M49	v	80	80	0	0
50	M50	v	80	80	0	0
51	M51	y	80	80	0	0
52	M52	v	80	80	0	0
53	M53	y	80	80	0	0
54	M54	v	80	80	0	0
55	M55	y	80	80	0	0
56	M56	v	80	80	0	0
57	M57	y	80	80	0	0
58	M58	v	80	80	0	0
59	M59	y	80	80	0	0

52¹⁹



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2010-0021
 Model Name : ESPAN 50'x90'

Aug 22, 2010
 8:27 PM
 Checked By: _____

Member Distributed Loads (BLC 3 : Wind #3) (Continued)

	Member Label	Direction	Start Magnitude(lb/ft.F)	End Magnitude(lb/ft.F)	Start Location(ft.%)	End Location(ft.%)
53	M60	v	80	80	0	0
54	M61	v	80	80	0	0
55	M62	v	80	80	0	0
56	M63	v	80	80	0	0
57	M64	v	80	80	0	0
58	M65	v	80	80	0	0
59	M66	v	80	80	0	0
60	M67	v	78	78	0	0
61	M68	v	-78	-78	0	0
62	M69	v	80	80	0	0
63	M70	v	80	80	0	0
64	M71	v	80	80	0	0
65	M72	v	80	80	0	0
66	M73	v	80	80	0	0
67	M74	v	80	80	0	0
68	M75	v	80	80	0	0
69	M76	v	80	80	0	0
70	M77	v	78	78	0	0

Member Distributed Loads (BLC 4 : Wind #4)

	Member Label	Direction	Start Magnitude(lb/ft.F)	End Magnitude(lb/ft.F)	Start Location(ft.%)	End Location(ft.%)
1	M1	v	83	83	0	0
2	M2	v	-83	-83	0	0
3	M3	v	-83	-83	0	0
4	M4	v	-83	-83	0	0
5	M5	v	-83	-83	0	0
6	M6	v	32	32	0	0
7	M7	v	32	32	0	0
8	M8	v	32	32	0	0
9	M9	v	32	32	0	0
10	M10	v	24	24	0	0
11	M11	v	83	83	0	0
12	M12	v	-83	-83	0	0
13	M13	v	-83	-83	0	0
14	M14	v	-83	-83	0	0
15	M15	v	-83	-83	0	0
16	M16	v	32	32	0	0
17	M17	v	32	32	0	0
18	M18	v	32	32	0	0
19	M19	v	32	32	0	0
20	M20	v	24	24	0	0
21	M21	v	83	83	0	0
22	M22	v	-83	-83	0	0
23	M23	v	-83	-83	0	0
24	M24	v	-83	-83	0	0
25	M25	v	-83	-83	0	0
26	M26	v	32	32	0	0
27	M27	v	32	32	0	0
28	M28	v	32	32	0	0
29	M29	v	32	32	0	0
30	M30	v	24	24	0	0
31	M31	v	83	83	0	0
32	M32	v	-83	-83	0	0
33	M33	v	-83	-83	0	0
34	M34	v	-83	-83	0	0
35	M35	v	-83	-83	0	0

53²⁰



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90

Aug 22, 2018
 6:27 PM
 Checked By: _____

Member Distributed Loads (BLC 4 : Wind #4) (Continued)

	Member Label	Direction	Start Magnitude(lb/ft.F)	End Magnitude(lb/ft.F)	Start Location(ft.%)	End Location(ft.%)
36	M43	y	32	32	0	0
37	M44	y	32	32	0	0
38	M45	y	32	32	0	0
39	M46	y	32	32	0	0
40	M47	y	24	24	0	0
41	M48	y	83	83	0	0
42	M49	y	-83	-83	0	0
43	M50	y	-83	-83	0	0
44	M51	y	-83	-83	0	0
45	M52	y	-83	-83	0	0
46	M53	y	32	32	0	0
47	M54	y	32	32	0	0
48	M55	y	32	32	0	0
49	M56	y	32	32	0	0
50	M57	y	24	24	0	0
51	M58	y	83	83	0	0
52	M59	y	-83	-83	0	0
53	M60	y	-83	-83	0	0
54	M61	y	-83	-83	0	0
55	M62	y	-83	-83	0	0
56	M63	y	32	32	0	0
57	M64	y	32	32	0	0
58	M65	y	32	32	0	0
59	M66	y	32	32	0	0
60	M67	y	24	24	0	0
61	M68	y	83	83	0	0
62	M69	y	-83	-83	0	0
63	M70	y	-83	-83	0	0
64	M71	y	-83	-83	0	0
65	M72	y	-83	-83	0	0
66	M73	y	32	32	0	0
67	M74	y	32	32	0	0
68	M75	y	32	32	0	0
69	M76	y	32	32	0	0
70	M77	y	24	24	0	0

Member Distributed Loads (BLC 5 : Wind #5)

	Member Label	Direction	Start Magnitude(lb/ft.F)	End Magnitude(lb/ft.F)	Start Location(ft.%)	End Location(ft.%)
1	M1	y	83	83	0	0
2	M2	y	-83	-83	0	0
3	M3	y	-83	-83	0	0
4	M4	y	-83	-83	0	0
5	M5	y	-83	-83	0	0
6	M6	y	32	32	0	0
7	M7	y	32	32	0	0
8	M8	y	32	32	0	0
9	M9	y	32	32	0	0
10	M10	y	24	24	0	0
11	M18	y	83	83	0	0
12	M19	y	-83	-83	0	0
13	M20	y	-83	-83	0	0
14	M21	y	-83	-83	0	0
15	M22	y	-83	-83	0	0
16	M23	y	32	32	0	0
17	M24	y	32	32	0	0
18	M25	y	32	32	0	0



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 60x90'

Aug 22, 2016
 6:27 PM
 Checked By: _____

Member Distributed Loads (BLC 5 : Wind #5) (Continued)

	Member Label	Direction	Start Magnitude(lb/ft.F)	End Magnitude(lb/ft.F)	Start Location(ft.%)	End Location(ft.%)
19	M28	y	32	32	0	0
20	M27	y	24	24	0	0
21	M28	y	83	83	0	0
22	M29	y	-83	-83	0	0
23	M30	y	-83	-83	0	0
24	M31	y	-83	-83	0	0
25	M32	y	-83	-83	0	0
26	M33	y	32	32	0	0
27	M34	y	32	32	0	0
28	M35	y	32	32	0	0
29	M36	y	32	32	0	0
30	M37	y	24	24	0	0
31	M38	y	83	83	0	0
32	M39	y	-83	-83	0	0
33	M40	y	-83	-83	0	0
34	M41	y	-83	-83	0	0
35	M42	y	-83	-83	0	0
36	M43	y	32	32	0	0
37	M44	y	32	32	0	0
38	M45	y	32	32	0	0
39	M46	y	32	32	0	0
40	M47	y	24	24	0	0
41	M48	y	83	83	0	0
42	M49	y	-83	-83	0	0
43	M50	y	-83	-83	0	0
44	M51	y	-83	-83	0	0
45	M52	y	-83	-83	0	0
46	M53	y	32	32	0	0
47	M54	y	32	32	0	0
48	M55	y	32	32	0	0
49	M56	y	32	32	0	0
50	M57	y	24	24	0	0
51	M58	y	83	83	0	0
52	M59	y	-83	-83	0	0
53	M60	y	-83	-83	0	0
54	M61	y	-83	-83	0	0
55	M62	y	-83	-83	0	0
56	M63	y	32	32	0	0
57	M64	y	32	32	0	0
58	M65	y	32	32	0	0
59	M66	y	32	32	0	0
60	M67	y	24	24	0	0
61	M68	y	83	83	0	0
62	M69	y	-83	-83	0	0
63	M70	y	-83	-83	0	0
64	M71	y	-83	-83	0	0
65	M72	y	-83	-83	0	0
66	M73	y	32	32	0	0
67	M74	y	32	32	0	0
68	M75	y	32	32	0	0
69	M76	y	32	32	0	0
70	M77	y	24	24	0	0



Basic Load Cases

	BLC Description	Category	X Gravity	Y Gravity	Z Gravity	Joint	Point	Distribu.	Area(M ²)	Surface
1	Wind #1	WL						70		
2	Wind #2	WL						70		
3	Wind #3	WL						70		
4	Wind #4	WL						70		
5	Wind #5	WL						70		
6	Wind #6	WL					14			
7	Self Weight	DL		-1						
8	Suspended Equipment	DL					14			
9	Unbalanced Suspended Equipm...	DL					7			

Load Combinations

1	Description	S	P	S	BLC		Fa		B		Fa		B		Fa		B		Fa		B	
					1	2	1	2	1	2	1	2	1	2	1	2						
1	0.6 Wind #1 + 0.6 Dead	Yes			1	.6	7	.6														
2	0.6 Wind #3 + 0.6 Dead	Yes			3	.6	7	.6														
3	0.6 Wind #4 + 0.6 Dead	Yes			4	.6	7	.6														
4	0.6 Wind #2 + Dead + Suspended...	Yes			2	.6	7	1	8	1												
5	0.6 Wind #5 + Dead + Suspended...	Yes			5	.6	7	1	8	1												
6	0.6 Wind #2 + Dead + Unbalance...	Yes			2	.6	7	1	9	1												
7	0.6 Wind #6 + Dead + Unbalance...	Yes			5	.6	7	1	9	1												
8	0.6 Wind #6 + Dead	Yes			6	.6	7	1														
9	Dead + Suspended Equipment	Yes					7	1	8	1												
10	Dead + Unbalanced Suspended E...	Yes					7	1	9	1												



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90'

Aug 22, 2016
 6:49 PM
 Checked By: _____

Envelope Joint Reactions


	Joint		X (in)	LC	Y (in)	LC	Z (in)	LC	MX (lb-ft)	LC	MY (lb-ft)	LC	MZ (lb-ft)	LC
1	N15	max	993.287	5	1224.34	5	3.487	5	0	1	0	1	0	1
2		min	-16.001	10	-1187.005	2	-857.05	8	0	1	0	1	0	1
3	N1	max	1022.787	3	993.844	5	1.76	5	0	1	0	1	0	1
4		min	-110.911	2	-1187.005	2	-857.05	8	0	1	0	1	0	1
5	N22	max	433.933	1	993.831	5	10.37	9	0	1	0	1	0	1
6		min	-215.317	8	-884.889	2	-1.502	2	0	1	0	1	0	1
7	N36	max	495.3	5	958.859	8	33.388	5	0	1	0	1	0	1
8		min	-73.482	2	-884.889	2	-1.502	2	0	1	0	1	0	1
9	N37	max	731.82	1	888.257	5	8.472	8	0	1	0	1	0	1
10		min	-185.288	9	-1076.719	2	-736	2	0	1	0	1	0	1
11	N51	max	936.224	5	591.014	5	8.472	8	0	1	0	1	0	1
12		min	-228.772	2	-1076.719	2	-736	2	0	1	0	1	0	1
13	N52	max	733.258	1	885.888	5	8.354	8	0	1	0	1	0	1
14		min	-186.177	9	-1076.719	2	0	3	0	1	0	1	0	1
15	N66	max	837.651	5	593.883	5	8.354	8	0	1	0	1	0	1
16		min	-220.465	2	-1076.719	2	0	3	0	1	0	1	0	1
17	N67	max	731.82	1	888.257	5	8.14	8	0	1	0	1	0	1
18		min	-185.288	9	-1076.719	2	-45	5	0	1	0	1	0	1
19	N81	max	936.224	5	591.014	5	8.14	8	0	1	0	1	0	1
20		min	-228.772	2	-1076.719	2	-793	6	0	1	0	1	0	1
21	N82	max	433.933	1	993.831	5	1.502	2	0	1	0	1	0	1
22		min	-104.214	9	-884.889	2	-843.81	8	0	1	0	1	0	1
23	N98	max	495.3	5	258.644	9	1.502	2	0	1	0	1	0	1
24		min	-119.253	8	-884.889	2	-843.81	8	0	1	0	1	0	1
25	N87	max	1022.787	3	1216.191	8	38.64	1	0	1	0	1	0	1
26		min	-110.911	2	-1187.005	2	-1.76	5	0	1	0	1	0	1
27	N111	max	993.287	5	1224.34	5	33.218	2	0	1	0	1	0	1
28		min	-16.001	10	-1187.005	2	-3.487	5	0	1	0	1	0	1
29	Totals:	max	9565.5	3	11151.32	5	0	6						
30		min	0	9	-14882.28	2	-3292.8	8						

Envelope Joint Reactions

	Joint		X (lb)	LC	Y (lb)	LC	Z (lb)	LC	MX (lb-ft)	LC	MY (lb-ft)	LC	MZ (lb-ft)	LC
1	N15	max	891.349	5	1309.409	5	46.422	5	0	1	0	1	0	1
2		min	15.622	10	-1225.798	2	-404.587	8	0	1	0	1	0	1
3	N1	max	1030.703	3	1030.08	5	18.588	9	0	1	0	1	0	1
4		min	-109.487	2	-1225.798	2	-404.597	8	0	1	0	1	0	1
5	N22	max	401.256	1	937.889	8	16.65	9	0	1	0	1	0	1
6		min	-210.359	8	-806.178	2	-428.815	8	0	1	0	1	0	1
7	N36	max	454.504	5	937.889	8	47.707	5	0	1	0	1	0	1
8		min	-41.345	2	-806.178	2	-428.815	8	0	1	0	1	0	1
9	N37	max	731.808	1	888.327	5	6.957	8	0	1	0	1	0	1
10		min	-185.073	9	-1075.719	2	-862	2	0	1	0	1	0	1
11	N51	max	935.858	5	590.945	5	6.817	8	0	1	0	1	0	1
12		min	-228.423	2	-1075.719	2	-862	2	0	1	0	1	0	1
13	N52	max	739.247	1	888.893	5	6.817	8	0	1	0	1	0	1
14		min	-188.189	9	-1075.719	2	0	1	0	1	0	1	0	1
15	N66	max	837.839	5	593.378	5	6.817	8	0	1	0	1	0	1
16		min	-230.453	2	-1075.719	2	0	3	0	1	0	1	0	1
17	N67	max	731.508	1	888.327	5	6.574	8	0	1	0	1	0	1
18		min	-185.073	9	-1075.719	2	-812	5	0	1	0	1	0	1
19	N81	max	935.858	5	590.945	5	6.574	8	0	1	0	1	0	1
20		min	-228.423	2	-1075.719	2	-923	6	0	1	0	1	0	1
21	N82	max	401.256	1	937.541	5	39.675	1	0	1	0	1	0	1
22		min	-84.104	9	-806.178	2	-424.15	8	0	1	0	1	0	1
23	N86	max	454.504	5	224.353	10	30.03	2	0	1	0	1	0	1
24		min	-131.083	8	-806.178	2	-424.15	8	0	1	0	1	0	1
25	N97	max	1030.703	3	1237.16	8	38.241	1	0	1	0	1	0	1
26		min	-109.487	2	-1225.798	2	-411.186	8	0	1	0	1	0	1
27	N111	max	891.349	5	1309.409	5	35.316	2	0	1	0	1	0	1
28		min	15.622	10	-1225.798	2	-411.186	8	0	1	0	1	0	1
29	Totals	max	9585.5	7	11151.32	5	0	4						
30		min	0	8	-14582.208	2	-3292.8	8						



Tension & Bending
 19-# 416 } 14.29
 19-# 416 }
 M = 5,824 lb-ft
 M = 1

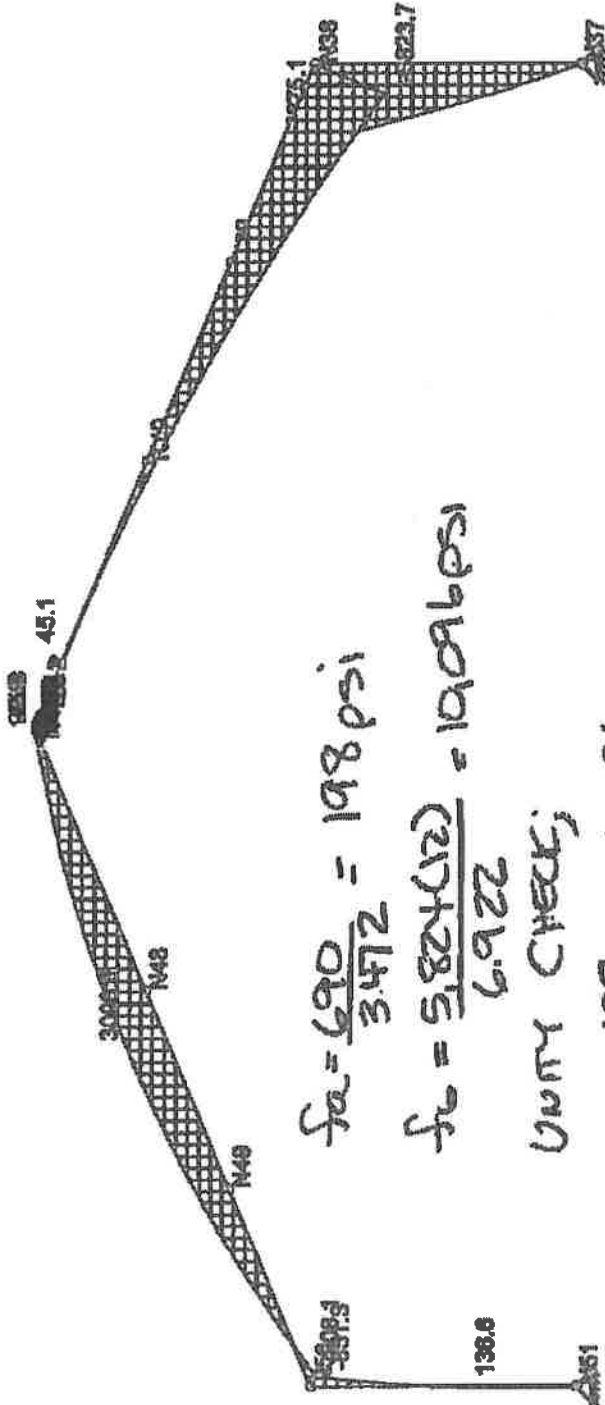

$f_a = \frac{690}{3.472} = 198 \text{ psi}$
 $f_b = \frac{5,824(12)}{6.922} = 10,096 \text{ psi}$
 UNITY CHECK;
 $\frac{198}{21,000} + \frac{10,096}{28,000} = 1.37 \leq 1.0$ OK

Results for LC 1, 0.6 Wind #1 + 0.6 Dead
Member z Bending Moments (lb-ft)

Mackintosh & Mackintosh, Inc.
 H Robson
 2016-0021

ESPAN 50x80

SK - 1

AUG 22, 2016 at 5:27 PM

2016-0021 ESPAN 50x80.r3t



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 60x90

Aug 22, 2016
 6:32 PM
 Checked By: _____


Member Section Forces

LC	Member Label	Sec	Axial(lb)	y Shear(lb)	z Shear(lb)	Torsion(lb-ft)	y-y Moment(lb)	z-z Moment(lb)
1	1	M28	1	-888.815	-731.508	-819	0	0
2			2	-894.889	-659.508	-819	0	-2.047
3			3	-701.121	-687.508	-819	0	-4.095
4			4	-707.375	-616.508	-819	0	-6.142
5			5	-713.628	-443.508	-819	0	-8.19
6	1	M29	1	-890.529	-481.959	-2.217	-7.539	3.199
7			2	-897.032	-351.528	-2.217	-7.539	-11.559
8			3	-707.041	-219.359	4.402	-7.539	7.88
9			4	-717.05	-87.19	-3.483	-7.539	8.297
10			5	-723.563	53.24	-3.483	-7.539	-14.758
11	1	M30	1	-725.312	-26.034	-3.483	-8.905	15.655
12			2	-725.275	-25.134	-3.483	-8.905	15.507
13			3	-725.237	-24.235	-3.483	-8.905	15.359
14			4	-725.2	-23.335	-3.483	-8.905	15.211
15			5	-725.162	-22.435	-3.483	-8.905	15.063
16	1	M31	1	-719	98.104	-3.483	-4.1	17.175
17			2	-718.981	98.956	-3.483	-4.1	17.034
18			3	-718.962	97.808	-3.483	-4.1	16.893
19			4	-718.944	96.661	-3.483	-4.1	16.752
20			5	-718.925	99.613	-3.483	-4.1	16.611
21	1	M32	1	-701.138	182.552	-3.483	-1.899	18.145
22			2	-701.132	183.442	-3.483	-1.899	17.998
23			3	-701.125	184.332	-3.483	-1.899	17.85
24			4	-701.119	185.222	-3.483	-1.899	17.703
25			5	-701.113	186.112	-3.483	-1.899	17.555
26	1	M33	1	-674.348	285.832	3.503	.241	17.646
27			2	-674.354	287.662	3.503	.241	17.795
28			3	-674.36	289.493	3.503	.241	17.944
29			4	-674.367	270.824	3.503	.241	18.093
30			5	-674.373	272.454	3.503	.241	18.243
31	1	M34	1	-635.302	342.701	3.503	2.467	16.904
32			2	-635.32	344.262	3.503	2.467	17.047
33			3	-635.339	345.822	3.503	2.467	17.189
34			4	-635.358	347.382	3.503	2.467	17.332
35			5	-635.377	348.943	3.503	2.467	17.474
36	1	M35	1	-565.487	440.613	3.503	5.347	15.628
37			2	-568.525	442.258	3.503	5.347	15.778
38			3	-568.562	443.899	3.503	5.347	15.928
39			4	-568.6	445.542	3.503	5.347	16.075
40			5	-568.637	447.185	3.503	5.347	16.225
41	1	M36	1	-514.221	-544.182	1.195	6.007	-2.549
42			2	-520.725	-287.932	1.195	6.007	6.408
43			3	-530.733	-39.943	-3.433	6.007	-10.547
44			4	-540.742	208.045	3.503	6.007	-7.029
45			5	-547.246	484.296	3.503	6.007	15.385
46	1	M37	1	-687.822	-99.192	-852	0	0
47			2	-674.075	-9.192	-852	0	-1.631
48			3	-680.329	80.808	-852	0	-3.262
49			4	-686.582	170.808	-852	0	-4.894
50			5	-692.835	260.808	-852	0	-6.525

60²⁷



TENSION & BENDING
 $T = 1,064 \text{ lb}$
 $M = 4,560 \text{ ft}\cdot\text{lb}$ } M 29

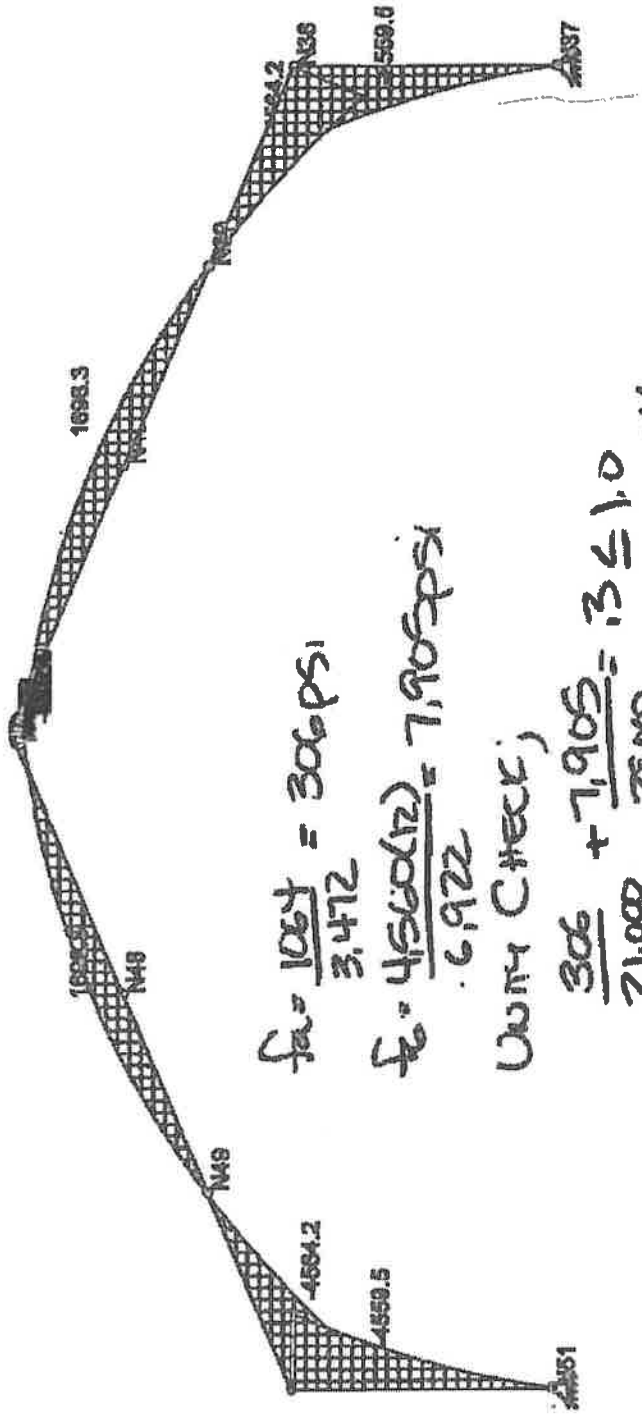

$$f_a = \frac{1064}{3.472} = 306 \text{ psi}$$

$$f_b = \frac{4560(12)}{6.922} = 7,905 \text{ psi}$$

UNITY CHECK;

$$\frac{306}{21,000} + \frac{7,905}{28,000} = .3 \leq 1.0$$

OK!!!

Results for LC 2, 0.6 Wind #3 + 0.6 Dead
 Member z Bending Moments (lb-ft)

MacIntosh & MacIntosh, Inc.	ESPAN 50'x80'	SK - 2
H Robson		Aug 22, 2016 at 5:28 PM
2016-0021		2016-0021 ESPAN 50'x80'.r3d

6/28

Member Section Forces


IC	Member Label	Sec	Axis(lb)	y Shear(lb)	x Shear(lb)	Torque(lb-ft)	y-y Moment(lb-ft)	z-x Moment(lb-ft)
1	2	M28	1	-1076.719	-228.423	-862	0	0
2			2	-1081.972	-342.423	-862	0	-2.155
3			3	-1088.225	-456.423	-862	0	-4.31
4			4	-1094.478	-570.423	-862	0	-6.465
5			5	-1100.732	-684.423	-862	0	-8.62
6	2	M29	1	-1083.51	-754.207	-2.007	-7.935	3.367
7			2	-1070.013	-450.032	-2.007	-7.935	9.99
8			3	-1080.022	-154.118	4.595	-7.935	10.766
9			4	-1090.031	141.798	-4.078	-7.935	9.489
10			5	-1098.534	445.972	-4.078	-7.935	-17.857
11	2	M30	1	-1114.851	-408.759	-4.078	-7.177	18.075
12			2	-1114.813	-404.808	-4.078	-7.177	18.501
13			3	-1114.576	-402.858	-4.078	-7.177	18.327
14			4	-1114.538	-400.907	-4.078	-7.177	18.153
15			5	-1114.501	-398.957	-4.078	-7.177	17.978
16	2	M31	1	-1188.194	-215.733	-4.078	-3.847	20.298
17			2	-1188.175	-213.88	-4.078	-3.847	20.132
18			3	-1188.156	-212.026	-4.078	-3.847	19.966
19			4	-1188.138	-210.173	-4.078	-3.847	19.8
20			5	-1188.119	-208.319	-4.078	-3.847	19.634
21	2	M32	1	-1188.108	-74.268	-4.078	-1.254	21.315
22			2	-1188.102	-72.329	-4.078	-1.254	21.142
23			3	-1188.098	-70.392	-4.078	-1.254	20.968
24			4	-1188.092	-68.454	-4.078	-1.254	20.795
25			5	-1188.083	-66.517	-4.078	-1.254	20.621
26	2	M33	1	-1188.083	66.517	4.078	1.254	20.621
27			2	-1188.089	68.454	4.078	1.254	20.795
28			3	-1188.098	70.392	4.078	1.254	20.968
29			4	-1188.102	72.329	4.078	1.254	21.142
30			5	-1188.108	74.268	4.078	1.254	21.315
31	2	M34	1	-1188.119	208.319	4.078	3.847	19.634
32			2	-1188.138	210.173	4.078	3.847	19.8
33			3	-1188.156	212.026	4.078	3.847	19.966
34			4	-1188.175	213.88	4.078	3.847	20.132
35			5	-1188.194	215.733	4.078	3.847	20.298
36	2	M35	1	-1114.501	398.957	4.078	7.177	17.978
37			2	-1114.538	400.907	4.078	7.177	18.153
38			3	-1114.576	402.858	4.078	7.177	18.327
39			4	-1114.613	404.808	4.078	7.177	18.501
40			5	-1114.651	406.759	4.078	7.177	18.675
41	2	M36	1	-1083.51	-754.207	2.007	7.935	-3.367
42			2	-1070.013	-450.032	2.007	7.935	-9.99
43			3	-1080.022	-154.118	-4.595	7.935	-10.766
44			4	-1090.031	141.798	4.078	7.935	-9.489
45			5	-1098.534	445.972	4.078	7.935	-17.867
46	2	M37	1	-1076.719	228.423	-862	0	0
47			2	-1081.972	342.423	-862	0	-2.155
48			3	-1088.225	456.423	-862	0	-4.31
49			4	-1094.478	570.423	-862	0	-6.465
50			5	-1100.732	684.423	-862	0	-8.62



COMPRESSION & BENDING

$C = 731 lb$
 $M = 7,195 ft-lb$

$H = 36, L = 26' \Rightarrow \frac{K \cdot L}{r} = \frac{26(12)}{2.48} = 126$
 $\therefore F_a = \frac{51,000}{126^2} = 3,212 psi$

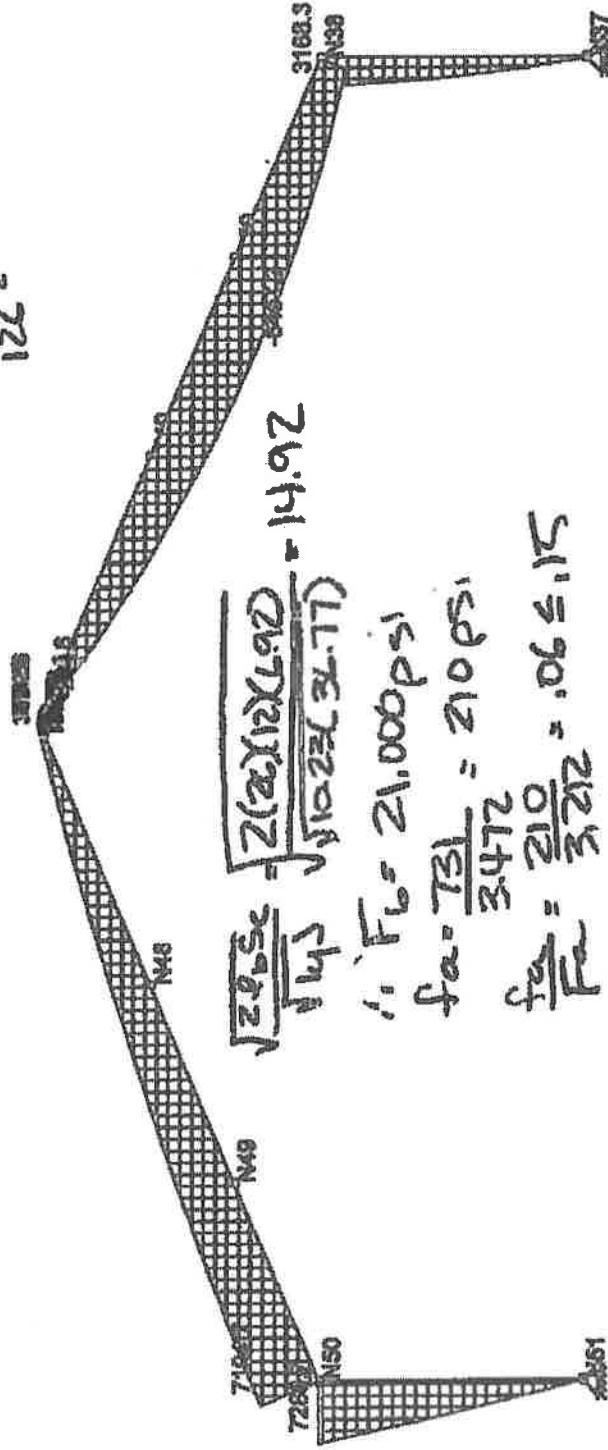

$$\frac{\sqrt{2 \cdot 965c}}{\sqrt{145}} = \frac{\sqrt{2(2)(12)(192)}}{\sqrt{10.23(31.77)}} = 14.92$$

$$\therefore F_b = 21,000 psi$$

$$f_a = \frac{731}{3472} = 210 psi$$

$$\frac{f_a}{F_a} = \frac{210}{3,212} = .06 \leq .15$$

$$f_c = \frac{7,195(12)}{692} = 12,477 psi$$

UNIFORM CHECK;
 $\frac{210}{3,212} + \frac{12,477}{21,000} = .7 \leq 1.0$ OKAY

Results for LC 3, 0.6 Wind #4 + 0.6 Dead Member z Bending Moments (lb-ft)

Mackintosh & Mackintosh, Inc.

H Robson

2016-0021

ESPAN 50'x90'

SK-3

AUG 22, 2016 at 5:29 PM

2016-0021 ESPAN 50x90.rsd

63



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 60x90'

Aug 22, 2016
 6:33 PM
 Checked By: _____

Member Section Forces

LC	Member Label	Sec	Ax(A)(lb)	y Shear(B)	z Shear(B)	Torque(lb-ft)	y-y Moment(lb...)	z-z Moment(lb...)
1	3	M26	1	656.472	-566.828	.263	0	0
2			2	649.219	-441.328	.263	0	656
3			3	642.966	-316.828	.263	0	1.313
4			4	636.712	-192.328	.263	0	1.969
5			5	630.459	-67.828	.263	0	2.625
6	3	M29	1	180.317	598.607	.026	2.417	-1.026
7			2	173.814	261.798	.026	2.417	-867
8			3	163.805	-103.275	-1.329	2.417	-7.682
9			4	163.796	-469.347	2.013	2.417	-4.255
10			5	147.293	-805.157	2.013	2.417	9.141
11	3	M30	1	181.236	807.078	2.013	2.026	-9.579
12			2	181.273	804.851	2.013	2.026	-9.493
13			3	181.31	802.623	2.013	2.026	-9.407
14			4	181.348	800.396	2.013	2.026	-9.322
15			5	181.385	798.168	2.013	2.026	-9.236
16	3	M31	1	317.707	772.206	2.013	.342	-10.113
17			2	317.726	770.079	2.013	.342	-10.031
18			3	317.744	767.952	2.013	.342	-9.949
19			4	317.763	765.825	2.013	.342	-9.867
20			5	317.782	763.698	2.013	.342	-9.785
21	3	M32	1	412.634	734.821	2.013	-.937	-10.418
22			2	412.64	732.694	2.013	-.937	-10.332
23			3	412.648	730.568	2.013	-.937	-10.247
24			4	412.653	728.441	2.013	-.937	-10.161
25			5	412.659	726.315	2.013	-.937	-10.075
26	3	M33	1	496.491	687.49	-1.937	-2.162	-9.806
27			2	496.485	688.201	-1.937	-2.162	-9.989
28			3	496.479	688.912	-1.937	-2.162	-10.071
29			4	496.473	689.623	-1.937	-2.162	-10.154
30			5	496.466	690.334	-1.937	-2.162	-10.236
31	3	M34	1	579.392	616.679	-1.937	-3.386	-9.24
32			2	579.373	617.26	-1.937	-3.386	-9.319
33			3	579.355	617.942	-1.937	-3.386	-9.398
34			4	579.336	618.623	-1.937	-3.386	-9.478
35			5	579.317	619.304	-1.937	-3.386	-9.555
36	3	M35	1	677.245	504.473	-1.937	-4.929	-8.186
37			2	677.207	505.183	-1.937	-4.929	-8.269
38			3	677.17	505.913	-1.937	-4.929	-8.352
39			4	677.132	506.633	-1.937	-4.929	-8.434
40			5	677.095	507.353	-1.937	-4.929	-8.517
41	3	M36	1	731.101	41.855	-1.926	-5.273	2.287
42			2	724.598	164.329	-1.926	-5.273	-10.582
43			3	714.699	259.641	3.128	-5.273	2.707
44			4	704.68	362.754	-1.937	-5.273	4.926
45			5	698.077	475.228	-1.937	-5.273	-7.989
46	3	M37	1	358.081	-800.672	.573	0	0
47			2	351.637	-784.872	.573	0	1.482
48			3	345.694	-728.672	.573	0	2.864
49			4	339.331	-692.672	.573	0	4.286
50			5	333.078	-656.672	.573	0	5.728


34

Y
Z
X

Tension & Bending

T = 295 lb } M 29
M = 4,230 ft-lb }

DOWN IN SECTION

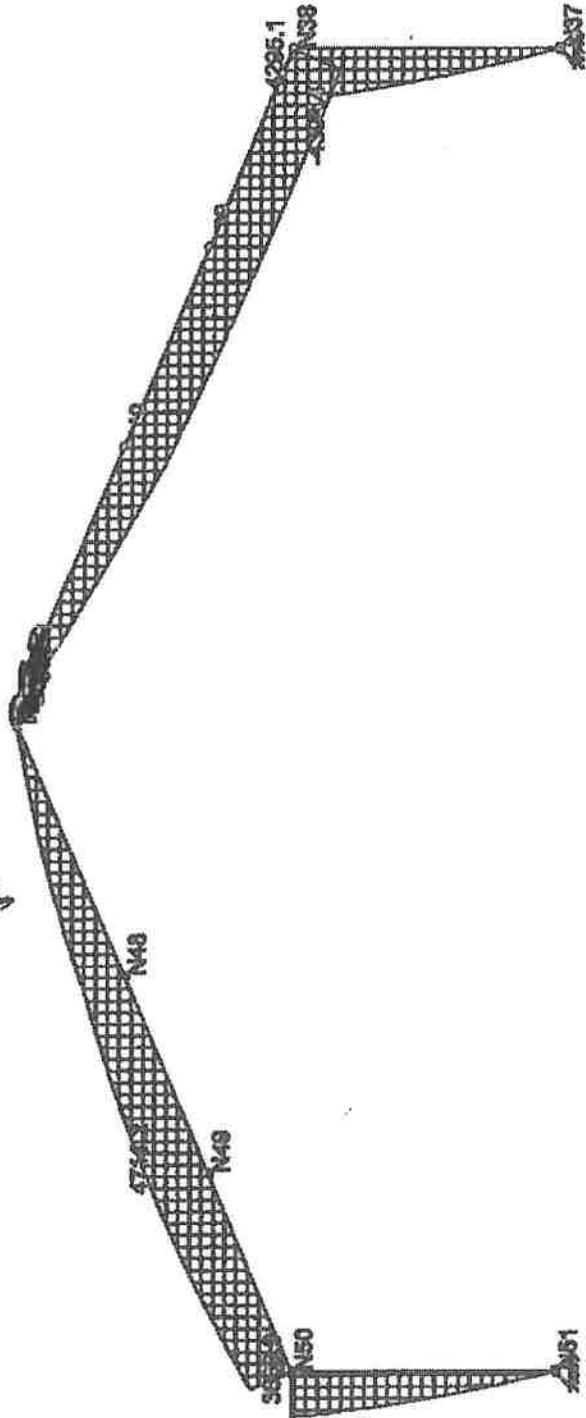

Results for LC 4, 0.6 Wind #2 + Dead + Suspended Equipment
Member Z Bending Moments (lb-ft)

Mackintosh & Mackintosh, Inc.

H Robson

2016-0021

ESPAN 50'x90'

SK - 4

AUG 22, 2016 at 5:34 PM

2016-0021 ESPAN 60x90.r3d

3265



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90'

Aug 22, 2016
 6:34 PM
 Checked By: _____

Member Section Forces

IC	Member Label	Sec	Axial(lb)	y Shear(lb)	z Shear(lb)	Torque(lb-ft)	y-y Moment(lb-ft)	z-z Moment(lb-ft)
1	4	M28	1	-26.156	-573.515	-112	0	0
2			2	-38.578	-501.515	-112	0	1343.788
3			3	-47	-429.515	-112	0	2507.573
4			4	-57.422	-357.515	-112	0	3491.359
5			5	-67.844	-285.515	-112	0	4295.145
6	4	M29	1	-295.175	35.801	-678	-1.028	-438
7			2	-306.014	-18.2	-678	-1.028	-4.078
8			3	-322.666	-85.47	645	-1.028	-1.755
9			4	-367.958	-290.824	623	-1.028	.255
10			5	-408.807	-344.325	623	-1.028	41
11	4	M30	1	-394.051	362.776	623	-1.044	-369
12			2	-393.969	382.43	623	-1.044	-368
13			3	-393.825	382.083	623	-1.044	-367
14			4	-393.684	381.737	623	-1.044	-366
15			5	-393.501	381.391	623	-1.044	-365
16	4	M31	1	-325.887	428.68	623	-1.092	-189
17			2	-325.636	426.343	623	-1.092	-187
18			3	-325.604	426.005	623	-1.092	-186
19			4	-325.573	425.667	623	-1.092	-185
20			5	-325.542	425.33	623	-1.092	-184
21	4	M32	1	-289.232	465.807	623	-1.107	-0.62
22			2	-289.222	465.451	623	-1.107	-0.61
23			3	-289.211	465.095	623	-1.107	-0.6
24			4	-289.201	464.739	623	-1.107	-0.59
25			5	-289.181	464.383	623	-1.107	-0.58
26	4	M33	1	-211.844	502.852	631	-1.108	073
27			2	-211.854	504.411	631	-1.108	074
28			3	-211.865	505.971	631	-1.108	075
29			4	-211.875	507.531	631	-1.108	077
30			5	-211.885	509.091	631	-1.108	078
31	4	M34	1	-146.538	518.599	631	-1.088	207
32			2	-146.568	521.093	631	-1.088	208
33			3	-146.599	522.597	631	-1.088	209
34			4	-146.63	524.08	631	-1.088	211
35			5	-146.661	525.574	631	-1.088	212
36	4	M35	1	-54.429	530.788	631	-1.036	388
37			2	-54.491	532.362	631	-1.036	388
38			3	-54.554	533.938	631	-1.036	389
39			4	-54.616	535.514	631	-1.036	39
40			5	-54.679	537.091	631	-1.036	392
41	4	M36	1	81.815	-285.888	-684	-1.018	432
42			2	70.978	-39.858	-684	-1.018	-4.12
43			3	54.295	192.408	645	-1.018	-1.809
44			4	-20.978	285.587	631	-1.018	227
45			5	-31.817	532.82	631	-1.018	43
46	4	M37	1	-174.573	-548.985	111	0	0
47			2	-184.985	-456.985	111	0	277
48			3	-195.417	-368.985	111	0	553
49			4	-205.839	-278.985	111	0	83
50			5	-216.261	-186.985	111	0	1.106


616



COMPRESSION OF BEAMS

$C = 937 \text{ lb}$
 $M = 8,545 \text{ ft-lb}$

$M_{36}; \phi = 20^\circ$
 $\frac{K_1}{r} = \frac{24(12)}{2.48} = 126$
 $\therefore F_a = \frac{51,000}{126^2} = 3,212 \text{ psi}$

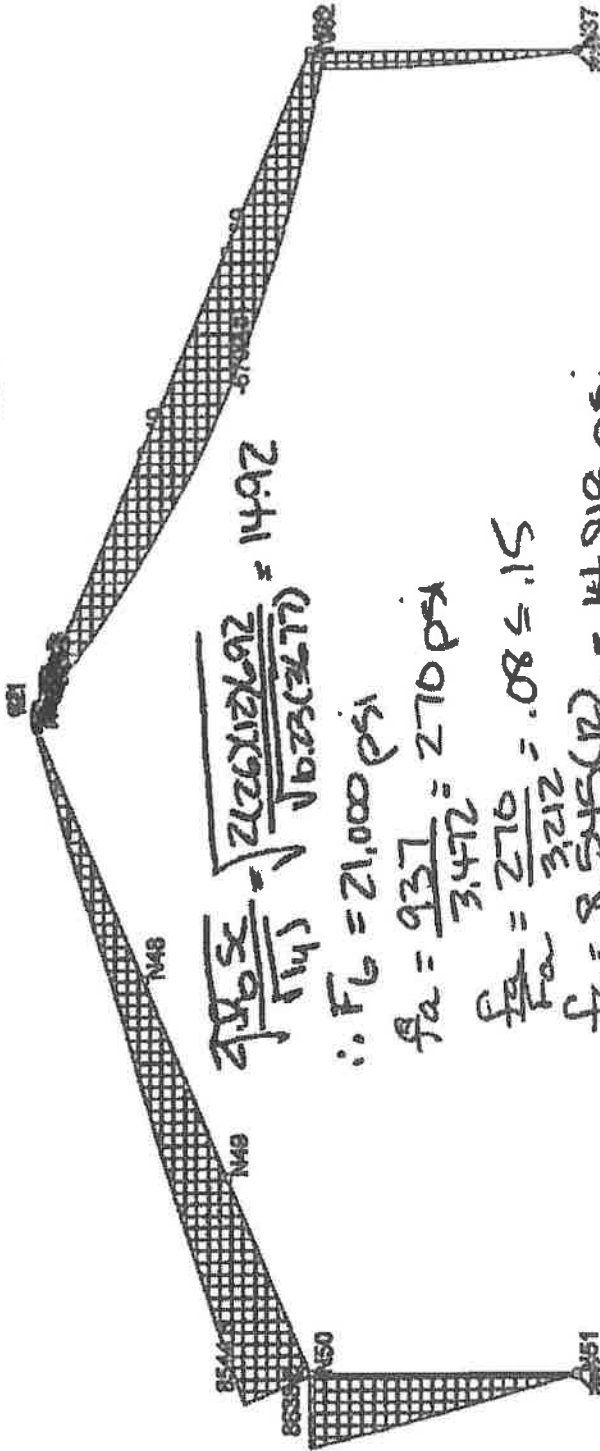

$$\sqrt{\frac{F_a C}{F_y}} = \sqrt{\frac{270(937)}{16,23(247)}} = 1492$$

$\therefore F_b = 21,000 \text{ psi}$

$f_a = \frac{937}{3,472} = 270 \text{ psi}$

$\frac{f_a}{F_a} = \frac{270}{3,212} = .08 \leq .15$

$f_z = \frac{8,545(12)}{6.92} = 14,818 \text{ psi}$

UNITY CHECK;

$$\frac{270}{3,212} + \frac{14,818}{21,000} = .8 \leq 1.0$$

Results for LC 5, 0.8 Wind #5 + Dead + Suspended Equipment
 Member z Bending Moments (lb-ft)

Mackintosh & Mackintosh, Inc.

H Robson

2016-0021

ESPAN 50'x60'

SK - 5

AUG 22, 2016 at 5:34 PM

2016-0021 ESPAN 50x60.r3d



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x00'

Aug 22, 2016
 5:34 PM
 Checked By: _____

Member Section Forces


LC	Member Label	Sec	Axial(lb)	y Shear(lb)	z Shear(lb)	Torque(lb-ft)	y-y Moment(lb...)	x-z Moment(lb...)
1	5	M28	1	888.327	-430.642	.612	0	0
2			2	877.904	-308.142	.612	0	1.531
3			3	867.482	-181.642	.612	0	3.062
4			4	857.06	-57.142	.612	0	4.593
5			5	846.638	67.358	.612	0	6.124
6	5	M29	1	388.888	738.289	.843	5.638	-2.392
7			2	378.029	382.271	.843	5.638	3.222
8			3	359.347	11.474	-3.198	5.638	-12.031
9			4	284.076	-487.408	3.667	5.638	-9.1
10			5	273.238	-854.434	3.667	5.638	18.308
11	5	M30	1	309.059	851.224	3.667	4.839	-17.18
12			2	309.122	848.89	3.667	4.839	-17.004
13			3	309.184	846.636	3.667	4.839	-16.847
14			4	309.247	844.341	3.667	4.839	-16.69
15			5	309.309	842.047	3.667	4.839	-16.534
16	5	M31	1	451.181	793.9	3.667	1.904	-18.362
17			2	451.212	791.706	3.667	1.904	-18.203
18			3	451.243	789.513	3.667	1.904	-18.054
19			4	451.275	787.319	3.667	1.904	-17.904
20			5	451.308	785.126	3.667	1.904	-17.755
21	5	M32	1	547.782	739.773	3.667	-4.28	-19.07
22			2	547.772	737.478	3.667	-4.28	-18.914
23			3	547.783	735.178	3.667	-4.28	-18.758
24			4	547.793	732.881	3.667	-4.28	-18.602
25			5	547.804	730.584	3.667	-4.28	-18.446
26	5	M33	1	631.636	682.821	-3.592	-2.881	-16.277
27			2	631.626	683.481	-3.592	-2.881	-18.43
28			3	631.616	684.102	-3.592	-2.881	-18.583
29			4	631.606	684.742	-3.592	-2.881	-18.736
30			5	631.596	685.382	-3.592	-2.881	-18.888
31	5	M34	1	712.916	595.152	-3.592	-4.947	-17.21
32			2	712.886	595.786	-3.592	-4.947	-17.358
33			3	712.854	596.381	-3.592	-4.947	-17.502
34			4	712.822	596.986	-3.592	-4.947	-17.648
35			5	712.791	597.61	-3.592	-4.947	-17.795
36	5	M35	1	805.169	460.694	-3.592	-7.843	-16.484
37			2	805.108	461.247	-3.592	-7.843	-16.638
38			3	805.044	461.801	-3.592	-7.843	-16.791
39			4	804.981	462.354	-3.592	-7.843	-16.945
40			5	804.919	462.907	-3.592	-7.843	-17.098
41	5	M36	1	937.862	162.647	-2.744	-8.494	3.604
42			2	928.813	284.804	-2.744	-8.494	-14.66
43			3	910.131	373.291	4.995	-8.494	7.057
44			4	834.869	323.696	-3.692	-8.494	8.771
45			5	824.02	425.951	-3.692	-8.494	-15.137
46	5	M37	1	590.945	-835.858	.923	0	0
47			2	580.523	-899.858	.923	0	2.307
48			3	570.101	-883.858	.923	0	4.613
49			4	559.679	-827.858	.923	0	6.92
50			5	549.257	-791.858	.923	0	9.227



TENSION & BENDING

T = 383 lb } M29
 M = 4.744 ft-lb } M29

OCAM SECTION
B.1 M29

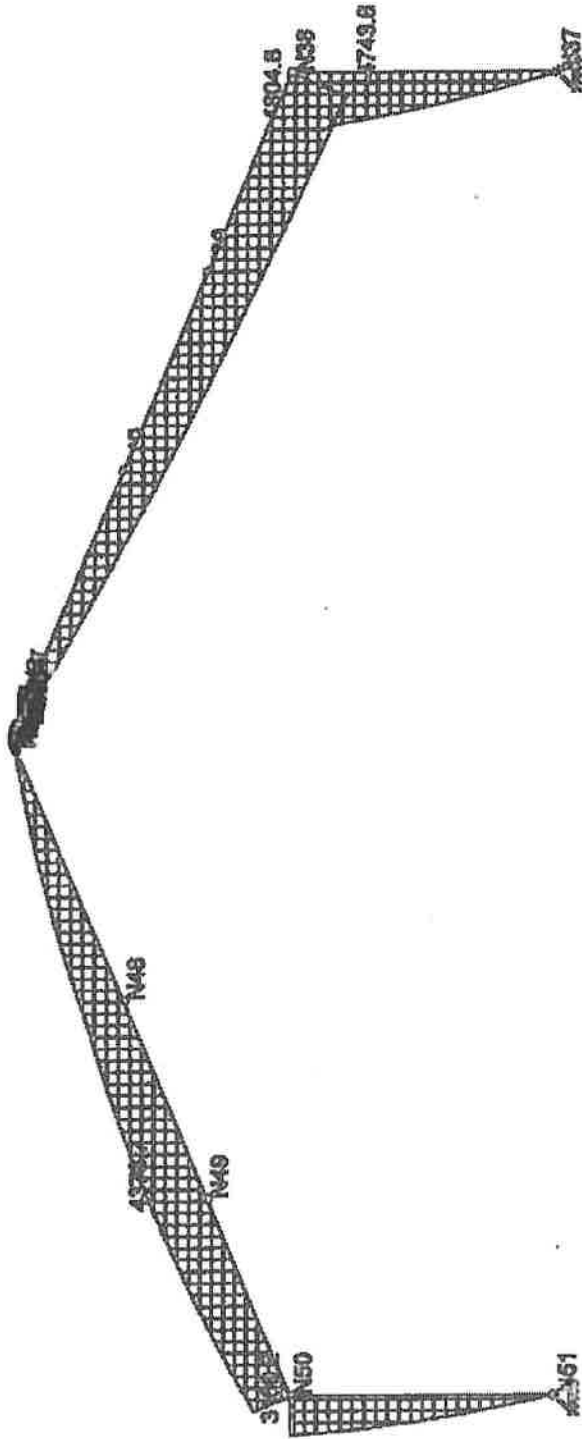

Results for LC 8, 0.8 Wind #2 + Dead + Unbalanced Suspended Equipment
 Member z Bending Moments (lb-ft)

Mackintosh & Mackintosh, Inc.

H Robson

2016-0021

ESPAN 50x80'

SK - 6

Aug 22, 2016 at 5:34 PM

2016-0021 ESPAN 50x80.L04

3689



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 60x90

Aug 22, 2016
 6:35 PM
 Checked By: _____

Member Section Forces


LC	Member Label	Sec	Axial(lb)	y Shear(lb)	z Shear(lb)	Torque(lb-ft)	y-y Moment(lb)	z-z Moment(lb)
1	6	M28	1	-131.262	-624.478	-238	0	0
2			2	-141.884	-552.478	-238	0	-595
3			3	-162.107	-480.478	-238	0	-1.191
4			4	-162.629	-408.478	-238	0	-1.786
5			5	-172.981	-336.478	-238	0	-2.381
6	6	M29	1	-383.148	-41.549	-848	-2.192	.93
7			2	-393.985	-95.05	-848	-2.192	-5.38
8			3	-410.666	-162.82	1.316	-2.192	.008
9			4	-427.348	-229.59	-.808	-2.192	1.704
10			5	-438.187	-293.091	-.808	-2.192	-2.341
11	6	M30	1	-428.007	302.846	-.808	-2.09	2.639
12			2	-428.945	302.5	-.808	-2.09	2.61
13			3	-425.882	302.154	-.808	-2.09	2.484
14			4	-425.82	301.808	-.808	-2.09	2.458
15			5	-425.767	301.462	-.808	-2.09	2.432
16	6	M31	1	-367.484	373.184	-.808	-1.621	2.958
17			2	-367.453	372.829	-.808	-1.621	2.933
18			3	-367.422	372.488	-.808	-1.621	2.908
19			4	-367.391	372.151	-.808	-1.621	2.883
20			5	-367.359	371.813	-.808	-1.621	2.859
21	6	M32	1	-317.472	417.998	-.808	-1.235	3.242
22			2	-317.462	417.642	-.808	-1.235	3.218
23			3	-317.451	417.286	-.808	-1.235	3.19
24			4	-317.441	416.93	-.808	-1.235	3.164
25			5	-317.43	416.574	-.808	-1.235	3.139
26	6	M33	1	-285.366	461.029	.858	-.846	-3.262
27			2	-285.368	462.588	.858	-.846	3.28
28			3	-285.377	464.148	.858	-.846	3.309
29			4	-285.387	465.708	.858	-.846	3.337
30			5	-285.398	467.268	.858	-.846	3.365
31	6	M34	1	-204.901	484.897	.858	-.429	3.238
32			2	-204.932	486.351	.858	-.429	3.253
33			3	-204.963	487.854	.858	-.429	3.28
34			4	-204.994	489.348	.858	-.429	3.307
35			5	-205.026	490.842	.858	-.429	3.333
36	6	M35	1	-117.911	606.646	.858	.134	3.189
37			2	-117.973	608.222	.858	.134	3.167
38			3	-118.036	609.798	.858	.134	3.198
39			4	-118.098	611.374	.858	.134	3.224
40			5	-118.161	612.95	.858	.134	3.252
41	6	M36	1	17.384	-307.308	-.333	.267	-.113
42			2	6.625	-61.275	-.333	.267	-2.329
43			3	-10.166	170.988	-.103	.267	-3.359
44			4	-65.429	285.167	.858	.267	-1.251
45			5	-98.268	511.2	.858	.267	3.131
46	6	M37	1	-219.488	-496.022	-.029	0	0
47			2	-229.888	-408.022	-.029	0	-.073
48			3	-240.31	-316.022	-.029	0	-1.148
49			4	-250.732	-228.022	-.029	0	-.218
50			5	-261.154	-136.022	-.029	0	-.29

70²⁶



COMPRESSION & BENDING

$C = 873 \text{ lb}$
 $M = 8,040 \text{ ft-lb}$ } $M \ 36 ; \ L = 26 \text{ ft}$
 (COPY BY INSPECTION)

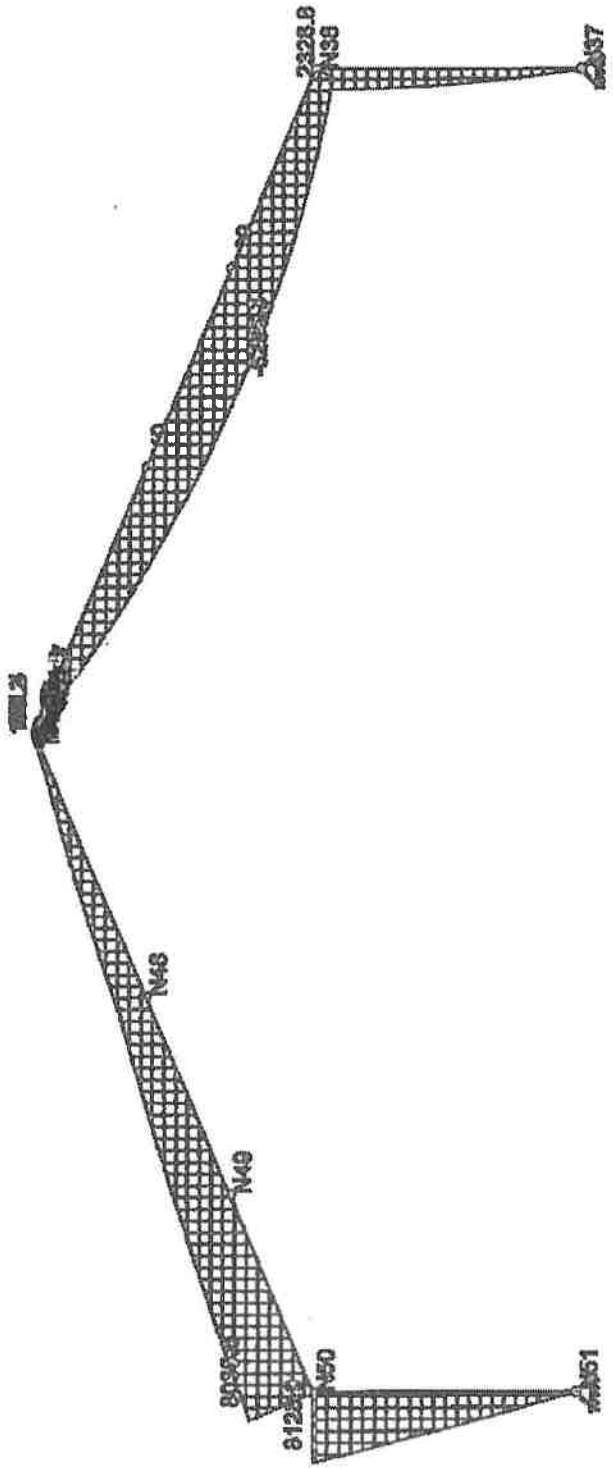

Results for LC 7, 0.6 Wind #5 + Dead + Unbalanced Suspended Equipment
 Member z Bending Moments (lb-ft)

Mackintosh & Mackintosh, Inc.	ESPAN 50'x80'	SK - 7
H Robson		AUG 22, 2016 at 6:35 PM
2016-0021		2016-0021 ESPAN 50'x80.rtd

37


Member Section Forces

LC	Member Label	Sec	Axis(lb)	y Shear(lb)	z Shear(lb)	Torque(lb-ft)	y-y Moment(lb...)	z-z Moment(lb...
1	7	M28	1	783.22	-481.608	488	0	0
2			2	772.798	-357.108	488	0	1.215
3			3	762.378	-232.608	488	0	2.43
4			4	751.958	-108.108	488	0	3.645
5			5	741.531	16.384	488	0	4.88
6	7	M29	1	288.897	662.449	573	4.473	-1.898
7			2	288.058	305.422	573	4.473	1.917
8			3	271.377	-65.378	-2.524	4.473	-10.289
9			4	254.695	-438.173	3.036	4.473	-8.651
10			5	243.658	-793.201	3.036	4.473	13.558
11	7	M30	1	277.103	791.295	3.036	3.893	-14.255
12			2	277.168	789	3.036	3.893	-14.125
13			3	277.228	786.708	3.036	3.893	-13.995
14			4	277.291	784.412	3.036	3.893	-13.868
15			5	277.353	782.118	3.036	3.893	-13.736
16	7	M31	1	409.363	740.384	3.036	1.375	-15.207
17			2	409.394	738.19	3.036	1.375	-15.084
18			3	409.428	735.997	3.036	1.375	-14.98
19			4	409.457	733.803	3.036	1.375	-14.836
20			5	409.488	731.61	3.036	1.375	-14.713
21	7	M32	1	499.522	691.994	3.036	-5.56	-15.778
22			2	499.533	689.887	3.036	-5.56	-15.647
23			3	499.543	687.37	3.036	-5.56	-15.517
24			4	499.554	685.072	3.036	-5.56	-15.388
25			5	499.564	682.775	3.036	-5.56	-15.259
26	7	M33	1	578.124	640.998	-2.984	-2.402	-15.097
27			2	578.114	641.838	-2.984	-2.402	-15.223
28			3	578.103	642.279	-2.984	-2.402	-15.35
29			4	578.093	642.919	-2.984	-2.402	-15.478
30			5	578.082	643.669	-2.984	-2.402	-15.602
31	7	M34	1	654.552	580.42	-2.984	-4.289	-14.191
32			2	654.521	581.034	-2.984	-4.289	-14.311
33			3	654.489	581.849	-2.984	-4.289	-14.432
34			4	654.458	582.264	-2.984	-4.289	-14.553
35			5	654.427	582.878	-2.984	-4.289	-14.673
36	7	M35	1	741.687	438.453	-2.984	-8.673	-12.731
37			2	741.624	437.107	-2.984	-8.673	-12.858
38			3	741.582	437.78	-2.984	-8.673	-12.985
39			4	741.489	438.414	-2.984	-8.673	-13.111
40			5	741.437	439.067	-2.984	-8.673	-13.238
41	7	M36	1	873.201	181.128	-2.393	-7.208	3.059
42			2	862.362	283.384	-2.393	-7.208	-12.87
43			3	845.681	351.871	4.247	-7.208	5.808
44			4	770.408	302.275	-2.984	-7.208	7.294
45			5	759.589	404.531	-2.984	-7.208	-12.436
46	7	M37	1	546.052	-884.894	783	0	0
47			2	535.63	-848.894	783	0	1.958
48			3	525.208	-812.894	783	0	3.915
49			4	514.786	-778.894	783	0	5.873
50			5	504.363	-740.894	783	0	7.83

38
72



CRANE
INSPECTION

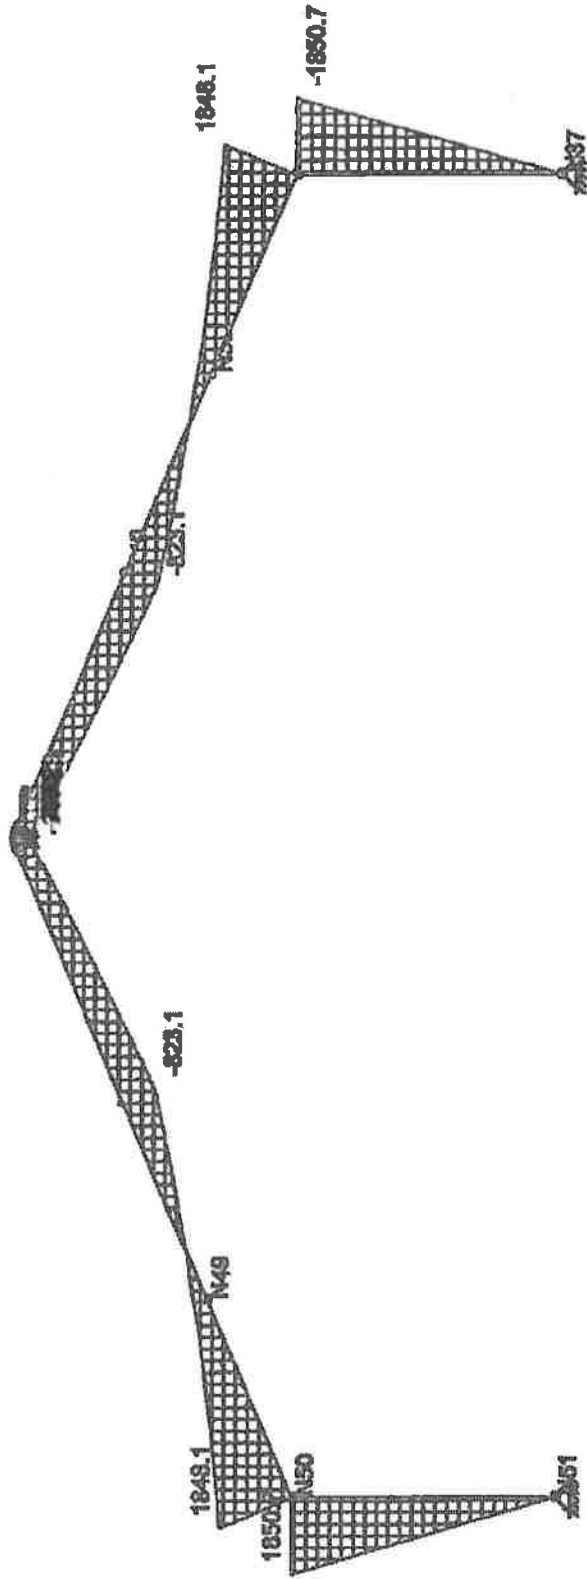

Results for LC 9, Dead + Suspended Equipment
Member z Bending Moments (lb-ft)

Mackintosh & Mackintosh, Inc.

H Robson

2016-0021

SK - 9

ESPAN 50'x60'

Aug 22, 2016 at 5:37 PM

2016-0021 ESPAN 50x60.rtd



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90

Aug 22, 2016
 6:38 PM
 Checked By: _____


Member Section Forces

LC	Member Label	Sec	Axial(lb)	y Shear(lb)	z Shear(lb)	Torque(lb-ft)	y-y Moment(lb)	x-z Moment(lb)
1	9	M28	1	357.136	185.073	.478	0	0
2			2	348.714	185.073	.478	0	1.189
3			3	338.292	185.073	.478	0	2.378
4			4	325.87	185.073	.478	0	3.567
5			5	315.447	185.073	.478	0	4.756
6	9	M29	1	287.744	204.328	-1.113	4.378	-1.858
7			2	278.905	178.783	-1.113	4.378	-5.553
8			3	260.223	139.489	-2.539	4.378	-9.904
9			4	184.951	-37.928	2.248	4.378	-5.223
10			5	174.112	-63.472	2.248	4.378	-9.742
11	9	M30	1	176.403	56.681	2.248	3.96	-10.304
12			2	178.465	56.514	2.248	3.96	-10.208
13			3	178.628	56.347	2.248	3.96	-10.112
14			4	176.59	56.18	2.248	3.96	-10.016
15			5	178.663	56.014	2.248	3.96	-9.92
16	9	M31	1	183.412	26.058	2.248	2.123	-11.198
17			2	183.443	25.892	2.248	2.123	-11.107
18			3	183.474	25.725	2.248	2.123	-11.015
19			4	183.506	25.558	2.248	2.123	-10.924
20			5	183.537	25.391	2.248	2.123	-10.832
21	9	M32	1	185.193	3.402	2.248	.892	-11.76
22			2	185.203	3.225	2.248	.892	-11.664
23			3	185.213	3.048	2.248	.892	-11.568
24			4	185.224	2.871	2.248	.892	-11.473
25			5	185.234	2.693	2.248	.892	-11.377
26	9	M33	1	185.234	-2.893	-2.248	-.892	-11.377
27			2	185.224	-2.871	-2.248	-.892	-11.473
28			3	185.213	-3.048	-2.248	-.892	-11.568
29			4	185.203	-3.225	-2.248	-.892	-11.664
30			5	185.193	-3.402	-2.248	-.892	-11.76
31	9	M34	1	183.537	-25.391	-2.248	-2.123	-10.832
32			2	183.506	-25.558	-2.248	-2.123	-10.924
33			3	183.474	-25.725	-2.248	-2.123	-11.015
34			4	183.443	-25.892	-2.248	-2.123	-11.107
35			5	183.412	-26.058	-2.248	-2.123	-11.198
36	9	M35	1	178.663	-56.014	-2.248	-3.96	-9.92
37			2	176.59	-56.18	-2.248	-3.96	-10.016
38			3	178.628	-56.347	-2.248	-3.96	-10.112
39			4	178.465	-56.514	-2.248	-3.96	-10.208
40			5	176.403	-56.681	-2.248	-3.96	-10.304
41	9	M36	1	287.744	204.328	-1.113	-4.378	1.858
42			2	278.905	178.783	-1.113	-4.378	-5.553
43			3	260.223	139.489	-2.539	-4.378	-9.904
44			4	184.951	-37.928	2.248	-4.378	-5.223
45			5	174.112	-63.472	2.248	-4.378	-9.742
46	9	M37	1	357.136	-185.073	.478	0	0
47			2	348.714	-185.073	.478	0	1.189
48			3	338.292	-185.073	.478	0	2.378
49			4	325.87	-185.073	.478	0	3.567
50			5	315.447	-185.073	.478	0	4.756

14



*NO
MEMBER
IN SECTION*

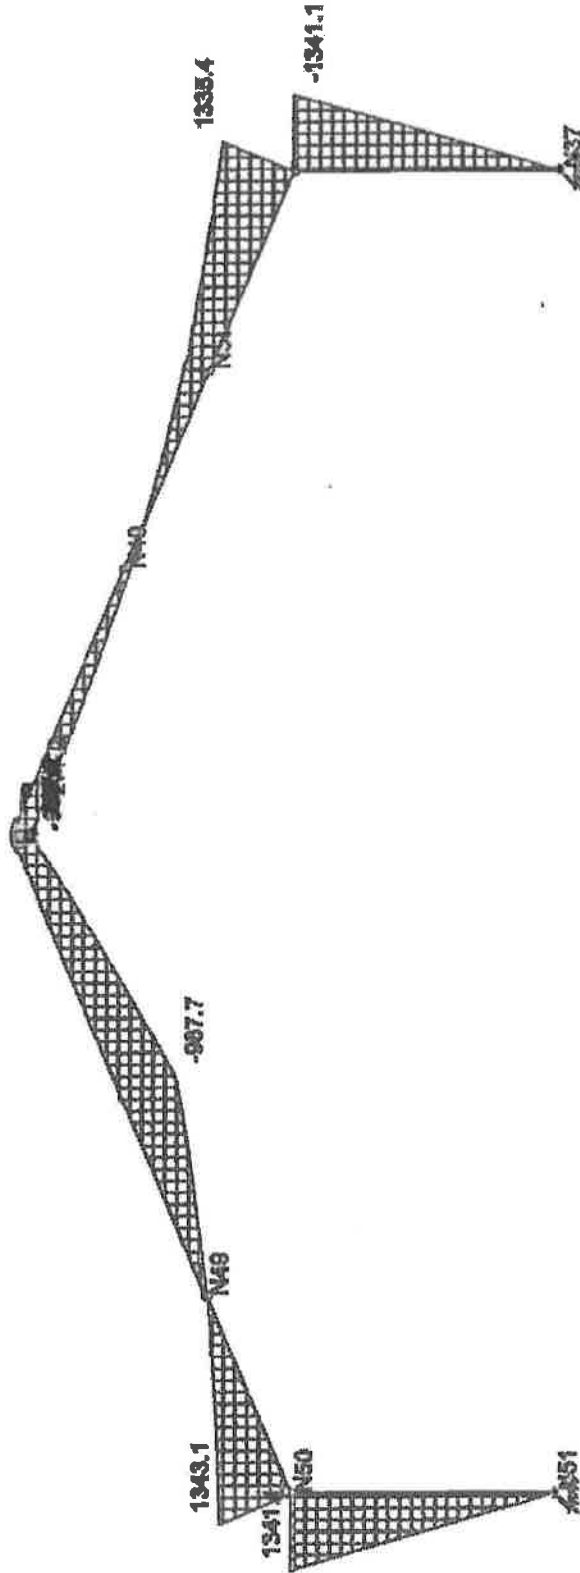

Results for LC 10, Dead + Unbalanced Suspended Equipment
Member z Bending Moments (D-ft)

Mackintosh & Mackintosh, Inc.

H Robson

2016-0021

SK - 10

AUG 22, 2016 at 5:38 PM

2016-0021 ESPAN 50x60.dwg

ESPAN 50x60'

5



Company : Meckintosh & Meckintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 60x90

Aug 22, 2016
 8:38 PM
 Checked By: _____

Member Section Forces

IC	Member Label	Sec	Axial(lb)	y Shear(lb)	z Shear(lb)	Torque(lb-ft)	y-y Moment(lb...)	z-z Moment(lb...
1	10	M29	1	252.029	134.109	.349	0	0
2			2	241.607	134.109	.349	0	.873
3			3	231.186	134.109	.349	0	1.746
4			4	220.763	134.109	.349	0	2.618
5			5	210.341	134.109	.349	0	3.491
6	10	M29	1	199.773	127.478	.843	3.214	-1.384
7			2	188.934	101.839	.843	3.214	4.248
8			3	172.263	62.62	-1.867	3.214	-4.142
9			4	155.571	23.306	1.617	3.214	-3.774
10			5	144.732	-2.239	1.617	3.214	6.992
11	10	M30	1	144.447	-3.249	1.617	2.914	-7.398
12			2	144.509	-3.416	1.617	2.914	-7.329
13			3	144.572	-3.582	1.617	2.914	-7.26
14			4	144.634	-3.749	1.617	2.914	-7.191
15			5	144.697	-3.916	1.617	2.914	-7.122
16	10	M31	1	141.594	-27.458	1.617	1.593	-8.053
17			2	141.626	-27.825	1.617	1.593	-7.988
18			3	141.657	-27.791	1.617	1.593	-7.922
19			4	141.689	-27.658	1.617	1.593	-7.856
20			5	141.719	-28.126	1.617	1.593	-7.79
21	10	M32	1	136.953	-44.408	1.617	.584	-8.465
22			2	136.983	-44.584	1.617	.584	-8.397
23			3	136.974	-44.761	1.617	.584	-8.328
24			4	136.984	-44.938	1.617	.584	-8.259
25			5	136.995	-45.115	1.617	.584	-8.19
26	10	M33	1	131.722	-44.516	-1.621	-4.32	-8.197
27			2	131.712	-44.694	-1.621	-4.32	-8.268
28			3	131.701	-44.871	-1.621	-4.32	-8.335
29			4	131.691	-45.048	-1.621	-4.32	-8.404
30			5	131.68	-45.225	-1.621	-4.32	-8.473
31	10	M34	1	125.173	-80.124	-1.621	-1.464	-7.813
32			2	125.141	-80.29	-1.621	-1.464	-7.879
33			3	125.11	-80.457	-1.621	-1.464	-7.945
34			4	125.079	-80.624	-1.621	-1.464	-8.011
35			5	125.048	-80.791	-1.621	-1.464	-8.077
36	10	M35	1	113.171	-80.154	-1.621	-2.79	-7.167
37			2	113.108	-80.321	-1.621	-2.79	-7.236
38			3	113.046	-80.487	-1.621	-2.79	-7.305
39			4	112.983	-80.654	-1.621	-2.79	-7.374
40			5	112.92	-80.821	-1.621	-2.79	-7.443
41	10	M36	1	223.293	182.908	-.762	-3.092	1.312
42			2	212.484	157.363	-.762	-3.092	-3.762
43			3	186.773	118.05	1.791	-3.092	4.353
44			4	120.5	-69.348	-1.621	-3.092	3.746
45			5	109.691	-84.892	-1.621	-3.092	-7.041
46	10	M37	1	312.243	-134.109	.338	0	0
47			2	301.82	-134.109	.338	0	.84
48			3	291.398	-134.109	.338	0	1.68
49			4	280.976	-134.109	.338	0	2.519
50			5	270.554	-134.109	.338	0	3.359

4276



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 60'x60'

Aug 22, 2016
 6:41 PM
 Checked By: _____

Envelope Member Section Forces

PERLUS

Member	Sec		Axial(lb)	LC	y Shear(lb)	LC	z Shear(lb)	LC	Torque(lb-ft)	LC	y-y Moment	LC	z-z Moment	LC	
1	M121	1	max	669,128	8	7,479	4	0	1	2.95	10	0	1	0	1
2			min	8,629	10	4,487	1	0	1	-75.91	3	0	1	0	1
3		2	max	669,128	8	3,739	4	0	1	2.95	10	0	1	-12.62	1
4			min	8,629	10	2,244	1	0	1	-75.91	3	0	1	-21,034	4
5		3	max	669,128	8	0	1	0	1	2.95	10	0	1	-16,827	1
6			min	8,629	10	0	1	0	1	-75.91	3	0	1	-28,045	4
7		4	max	669,128	8	-2,244	1	0	1	2.95	10	0	1	-12.62	1
8			min	8,629	10	-3,739	4	0	1	-75.91	3	0	1	-21,034	4
9		5	max	669,128	8	-4,487	1	0	1	2.95	10	0	1	0	1
10			min	8,629	10	-7,479	4	0	1	-75.91	3	0	1	0	1
11	M85	1	max	669,128	8	7,479	4	0	1	7.17	2	0	1	0	1
12			min	1,766	7	4,487	1	0	1	-79.771	5	0	1	0	1
13		2	max	669,128	8	3,739	4	0	1	7.17	2	0	1	-12.62	1
14			min	1,766	7	2,244	1	0	1	-79.771	5	0	1	-21,034	4
15		3	max	669,128	8	0	1	0	1	7.17	2	0	1	-16,827	1
16			min	1,766	7	0	1	0	1	-79.771	5	0	1	-28,045	4
17		4	max	669,128	8	-2,244	1	0	1	7.17	2	0	1	-12.62	1
18			min	1,766	7	-3,739	4	0	1	-79.771	5	0	1	-21,034	4
19		5	max	669,128	8	-4,487	1	0	1	7.17	2	0	1	0	1
20			min	1,766	7	-7,479	4	0	1	-79.771	5	0	1	0	1
21	M126	1	max	519,233	8	7,479	4	0	1	75.91	3	0	1	0	1
22			min	8,629	10	4,487	1	0	1	-3,549	8	0	1	0	1
23		2	max	519,233	8	3,739	4	0	1	75.91	3	0	1	-12.62	1
24			min	8,629	10	2,244	1	0	1	-3,549	8	0	1	-21,034	4
25		3	max	519,233	8	0	1	0	1	75.91	3	0	1	-16,827	1
26			min	8,629	10	0	1	0	1	-3,549	8	0	1	-28,045	4
27		4	max	519,233	8	-2,244	1	0	1	75.91	3	0	1	-12.62	1
28			min	8,629	10	-3,739	4	0	1	-3,549	8	0	1	-21,034	4
29		5	max	519,233	8	-4,487	1	0	1	75.91	3	0	1	0	1
30			min	8,629	10	-7,479	4	0	1	-3,549	8	0	1	0	1
31	M90	1	max	519,233	8	7,479	4	0	1	79.771	5	0	1	0	1
32			min	1,766	7	4,487	1	0	1	-7.17	2	0	1	0	1
33		2	max	519,233	8	3,739	4	0	1	79.771	5	0	1	-12.62	1
34			min	1,766	7	2,244	1	0	1	-7.17	2	0	1	-21,034	4
35		3	max	519,233	8	0	1	0	1	79.771	5	0	1	-16,827	1
36			min	1,766	7	0	1	0	1	-7.17	2	0	1	-28,045	4
37		4	max	519,233	8	-2,244	1	0	1	79.771	5	0	1	-12.62	1
38			min	1,766	7	-3,739	4	0	1	-7.17	2	0	1	-21,034	4
39		5	max	519,233	8	-4,487	1	0	1	79.771	5	0	1	0	1
40			min	1,766	7	-7,479	4	0	1	-7.17	2	0	1	0	1
41	M107	1	max	420,867	5	7,479	8	0	1	1,998	10	0	1	0	1
42			min	-500,919	2	4,487	1	0	1	-45,894	3	0	1	0	1
43		2	max	420,867	5	3,739	8	0	1	1,998	10	0	1	-12.62	1
44			min	-500,919	2	2,244	1	0	1	-45,894	3	0	1	-21,034	5
45		3	max	420,867	5	0	1	0	1	1,998	10	0	1	-16,827	1
46			min	-500,919	2	0	1	0	1	-45,894	3	0	1	-28,045	5
47		4	max	420,867	5	-2,244	3	0	1	1,998	10	0	1	-12.62	1
48			min	-500,919	2	-3,739	4	0	1	-45,894	3	0	1	-21,034	5
49		5	max	420,867	5	-4,487	3	0	1	1,998	10	0	1	0	1
50			min	-500,919	2	-7,479	4	0	1	-45,894	3	0	1	0	1
51	M104	1	max	420,867	5	7,479	8	0	1	45,894	3	0	1	0	1
52			min	-500,919	2	4,487	3	0	1	-1,998	10	0	1	0	1
53		2	max	420,867	5	3,739	8	0	1	45,894	3	0	1	-12.62	3
54			min	-500,919	2	2,244	3	0	1	-1,998	10	0	1	-21,034	8
55		3	max	420,867	5	0	1	0	1	45,894	3	0	1	-16,827	3
56			min	-500,919	2	0	1	0	1	-1,998	10	0	1	-28,045	8

43
77



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90

Aug 22, 2016
 8:41 PM
 Checked By: _____

Envelope Member Section Forces (Continued)

Member	Sec		Axial(lb)	LC	y Shear(lb)	LC	x Shear(lb)	LC	Torque(lb-ft)	LC	y-y Moment	LC	z-z Moment	LC	
67	4	max	420.867	5	-2.244	1	0	1	45.694	3	0	1	-12.62	3	
68		min	-500.919	2	-3.739	5	0	1	-3.995	10	0	1	-21.034	3	
69	5	max	420.867	5	-4.487	1	0	1	45.694	3	0	1	0	1	
70		min	-500.919	2	-7.479	5	0	1	-1.998	10	0	1	0	1	
81	M106	1	max	415.088	5	7.479	4	0	1	.088	10	0	1	0	1
82		min	-493.987	2	4.487	1	0	1	-2.045	3	0	1	0	1	
83	2	max	415.088	5	3.739	4	0	1	.088	10	0	1	-12.62	1	
84		min	-493.987	2	2.244	1	0	1	-2.045	3	0	1	-21.034	4	
85	3	max	415.088	5	0	1	0	1	.088	10	0	1	-16.827	1	
86		min	-493.987	2	0	1	0	1	-2.045	3	0	1	-28.045	4	
87	4	max	415.088	5	-2.244	1	0	1	.088	10	0	1	-12.62	1	
88		min	-493.987	2	-3.739	4	0	1	-2.045	3	0	1	-21.034	4	
89	5	max	415.088	5	-4.487	1	0	1	.088	10	0	1	0	1	
90		min	-493.987	2	-7.479	4	0	1	-2.045	3	0	1	0	1	
91	M105	1	max	415.088	5	7.479	4	0	1	2.045	3	0	1	0	1
92		min	-493.987	2	4.487	1	0	1	-.088	10	0	1	0	1	
93	2	max	415.088	5	3.739	4	0	1	2.045	3	0	1	-12.62	1	
94		min	-493.987	2	2.244	1	0	1	-.088	10	0	1	-21.034	4	
95	3	max	415.088	5	0	1	0	1	2.045	3	0	1	-16.827	1	
96		min	-493.987	2	0	1	0	1	-.088	10	0	1	-28.045	4	
97	4	max	415.088	5	-2.244	1	0	1	2.045	3	0	1	-12.62	1	
98		min	-493.987	2	-3.739	4	0	1	-.088	10	0	1	-21.034	4	
99	5	max	415.088	5	-4.487	1	0	1	2.045	3	0	1	0	1	
100		min	-493.987	2	-7.479	4	0	1	-.088	10	0	1	0	1	
101	M108	1	max	432.83	5	7.479	5	0	1	7.477	10	0	1	0	1
102		min	-16.807	1	4.487	1	0	1	-108.355	5	0	1	0	1	
103	2	max	432.83	5	3.739	5	0	1	7.477	10	0	1	-12.62	1	
104		min	-16.807	1	2.244	1	0	1	-108.355	5	0	1	-21.034	5	
105	3	max	432.83	5	0	1	0	1	7.477	10	0	1	-16.827	1	
106		min	-16.807	1	0	1	0	1	-108.355	5	0	1	-28.045	5	
107	4	max	432.83	5	-2.244	3	0	1	7.477	10	0	1	-12.62	1	
108		min	-16.807	1	-3.739	8	0	1	-108.355	5	0	1	-21.034	4	
109	5	max	432.83	5	-4.487	3	0	1	7.477	10	0	1	0	1	
110		min	-16.807	1	-7.479	8	0	1	-108.355	5	0	1	0	1	
111	M103	1	max	432.83	5	7.479	4	0	1	108.355	5	0	1	0	1
112		min	-16.807	1	4.487	3	0	1	-7.477	10	0	1	0	1	
113	2	max	432.83	5	3.739	4	0	1	108.355	5	0	1	-12.62	3	
114		min	-16.807	1	2.244	3	0	1	-7.477	10	0	1	-21.034	4	
115	3	max	432.83	5	0	1	0	1	108.355	5	0	1	-16.827	3	
116		min	-16.807	1	0	1	0	1	-7.477	10	0	1	-28.045	4	
117	4	max	432.83	5	-2.244	1	0	1	108.355	5	0	1	-12.62	3	
118		min	-16.807	1	-3.739	8	0	1	-7.477	10	0	1	-21.034	4	
119	5	max	432.83	5	-4.487	1	0	1	108.355	5	0	1	0	1	
120		min	-16.807	1	-7.479	8	0	1	-7.477	10	0	1	0	1	
121	M125	1	max	221.899	2	7.479	4	0	1	93.984	5	0	1	0	1
122		min	-383.789	5	4.487	1	0	1	-4.058	2	0	1	0	1	
123	2	max	221.899	2	3.739	4	0	1	93.984	5	0	1	-12.62	1	
124		min	-383.789	5	2.244	1	0	1	-4.058	2	0	1	-21.034	4	
125	3	max	221.899	2	0	1	0	1	93.984	5	0	1	-16.827	1	
126		min	-383.789	5	0	1	0	1	-4.058	2	0	1	-28.045	4	
127	4	max	221.899	2	-2.244	1	0	1	93.984	5	0	1	-12.62	1	
128		min	-383.789	5	-3.739	4	0	1	-4.058	2	0	1	-21.034	4	
129	5	max	221.899	2	-4.487	1	0	1	93.984	5	0	1	0	1	
130		min	-383.789	5	-7.479	4	0	1	-4.058	2	0	1	0	1	
131	M122	1	max	221.899	2	7.479	4	0	1	4.058	2	0	1	0	1
132		min	-383.789	5	4.487	1	0	1	-93.984	5	0	1	0	1	
133	2	max	221.899	2	3.739	4	0	1	4.058	2	0	1	-12.62	1	

478



Company : Mackintosh & Mackintosh, Inc.
 Designer : N Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90'

Aug 22, 2016
 6:41 PM
 Checked By: _____

Envelope Member Section Forces (Continued)

Member	Sec		Axial(lb)	LC	v Shear(lb)	LC	z Shear(lb)	LC	Torsion(lb-ft)	LC	v-v Moment	LC	z-z Moment	LC	
114		min	-383.789	5	2.244	1	0	1	-83.884	5	0	1	-21.034	4	
115	3	max	221.889	2	0	1	0	1	4.058	2	0	1	-16.827	1	
116		min	-383.789	5	0	1	0	1	-83.884	5	0	1	-28.045	4	
117	4	max	221.889	2	-2.244	1	0	1	4.058	2	0	1	-12.62	1	
118		min	-383.789	5	-3.739	4	0	1	-83.884	5	0	1	-21.034	4	
119	5	max	221.889	2	-4.487	1	0	1	4.058	2	0	1	0	1	
120		min	-383.789	5	-7.479	4	0	1	-83.884	5	0	1	0	1	
121	M124	1	max	219.166	2	7.479	4	0	1	3.164	5	0	1	0	1
122		min	-360.331	5	4.487	1	0	1	-15	2	0	1	0	1	
123	2	max	219.166	2	3.739	4	0	1	3.164	5	0	1	-12.62	1	
124		min	-360.331	5	2.244	1	0	1	-15	2	0	1	-21.034	4	
125	3	max	219.166	2	0	1	0	1	3.164	5	0	1	-16.827	1	
126		min	-360.331	5	0	1	0	1	-15	2	0	1	-28.045	4	
127	4	max	219.166	2	-2.244	1	0	1	3.164	5	0	1	-12.62	1	
128		min	-360.331	5	-3.739	4	0	1	-15	2	0	1	-21.034	4	
129	5	max	219.166	2	-4.487	1	0	1	3.164	5	0	1	0	1	
130		min	-360.331	5	-7.479	4	0	1	-15	2	0	1	0	1	
131	M123	1	max	219.166	2	7.479	4	0	1	15	2	0	1	0	1
132		min	-360.331	5	4.487	1	0	1	-3.164	5	0	1	0	1	
133	2	max	219.166	2	3.739	4	0	1	15	2	0	1	-12.62	1	
134		min	-360.331	5	2.244	1	0	1	-3.164	5	0	1	-21.034	4	
135	3	max	219.166	2	0	1	0	1	15	2	0	1	-16.827	1	
136		min	-360.331	5	0	1	0	1	-3.164	5	0	1	-28.045	4	
137	4	max	219.166	2	-2.244	1	0	1	15	2	0	1	-12.62	1	
138		min	-360.331	5	-3.739	4	0	1	-3.164	5	0	1	-21.034	4	
139	5	max	219.166	2	-4.487	1	0	1	15	2	0	1	0	1	
140		min	-360.331	5	-7.479	4	0	1	-3.164	5	0	1	0	1	
141	M89	1	max	274.711	1	7.479	4	0	1	88.66	3	0	1	0	1
142		min	-124.849	9	4.487	1	0	1	-5.464	10	0	1	0	1	
143	2	max	274.711	1	3.739	4	0	1	88.66	3	0	1	-12.62	1	
144		min	-124.849	9	2.244	1	0	1	-5.464	10	0	1	-21.034	4	
145	3	max	274.711	1	0	1	0	1	88.66	3	0	1	-16.827	1	
146		min	-124.849	9	0	1	0	1	-5.464	10	0	1	-28.045	4	
147	4	max	274.711	1	-2.244	1	0	1	88.66	3	0	1	-12.62	1	
148		min	-124.849	9	-3.739	4	0	1	-5.464	10	0	1	-21.034	4	
149	5	max	274.711	1	-4.487	1	0	1	88.66	3	0	1	0	1	
150		min	-124.849	9	-7.479	4	0	1	-5.464	10	0	1	0	1	
151	M86	1	max	274.711	1	7.479	4	0	1	5.464	10	0	1	0	1
152		min	-131.884	8	4.487	1	0	1	-88.66	3	0	1	0	1	
153	2	max	274.711	1	3.739	4	0	1	5.464	10	0	1	-12.62	1	
154		min	-131.884	8	2.244	1	0	1	-88.66	3	0	1	-21.034	4	
155	3	max	274.711	1	0	1	0	1	5.464	10	0	1	-16.827	1	
156		min	-131.884	8	0	1	0	1	-88.66	3	0	1	-28.045	4	
157	4	max	274.711	1	-2.244	1	0	1	5.464	10	0	1	-12.62	1	
158		min	-131.884	8	-3.739	4	0	1	-88.66	3	0	1	-21.034	4	
159	5	max	274.711	1	-4.487	1	0	1	5.464	10	0	1	0	1	
160		min	-131.884	8	-7.479	4	0	1	-88.66	3	0	1	0	1	
161	M88	1	max	271.933	1	7.479	4	0	1	2.974	3	0	1	0	1
162		min	-123.485	9	4.487	1	0	1	-202	8	0	1	0	1	
163	2	max	271.933	1	3.739	4	0	1	2.974	3	0	1	-12.62	1	
164		min	-123.485	9	2.244	1	0	1	-202	8	0	1	-21.034	4	
165	3	max	271.933	1	0	1	0	1	2.974	3	0	1	-16.827	1	
166		min	-123.485	9	0	1	0	1	-202	8	0	1	-28.045	4	
167	4	max	271.933	1	-2.244	1	0	1	2.974	3	0	1	-12.62	1	
168		min	-123.485	9	-3.739	4	0	1	-202	8	0	1	-21.034	4	
169	5	max	271.933	1	-4.487	1	0	1	2.974	3	0	1	0	1	
170		min	-123.485	9	-7.479	4	0	1	-202	8	0	1	0	1	

4579



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90

Aug 22, 2016
 6:41 PM
 Checked By: _____

Envelope Member Section Forces (Continued)

Member	Seg		Axial(lb)	LC	y Shear(lb)	LC	z Shear(lb)	LC	Torque(lb-ft)	LC	y-y Momen	LC	z-z Momen	LC	
171	M87	1	max	271.933	1	7.479	4	0	1	.187	10	0	1	0	1
172			min	-123.485	9	4.487	1	0	1	-2.974	3	0	1	0	1
173		2	max	271.933	1	3.739	4	0	1	.187	10	0	1	-12.62	1
174			min	-123.485	9	2.244	1	0	1	-2.974	3	0	1	-21.034	4
175		3	max	271.933	1	0	1	0	1	.187	10	0	1	-16.827	1
176			min	-123.485	9	0	1	0	1	-2.974	3	0	1	-28.045	4
177		4	max	271.933	1	-2.244	1	0	1	.187	10	0	1	-12.62	1
178			min	-123.485	9	-3.739	4	0	1	-2.974	3	0	1	-21.034	4
179		5	max	271.933	1	-4.487	1	0	1	.187	10	0	1	0	1
180			min	-123.485	9	-7.479	4	0	1	-2.974	3	0	1	0	1
181	M109	1	max	198.375	8	7.479	4	0	1	50.645	5	0	1	0	1
182			min	-22.068	2	4.487	1	0	1	-3.349	2	0	1	0	1
183		2	max	198.375	8	3.739	4	0	1	50.645	5	0	1	-12.62	1
184			min	-22.068	2	2.244	1	0	1	-3.349	2	0	1	-21.034	4
185		3	max	198.375	8	0	1	0	1	50.645	5	0	1	-16.827	1
186			min	-22.068	2	0	1	0	1	-3.349	2	0	1	-28.045	4
187		4	max	198.375	8	-2.244	3	0	1	50.645	5	0	1	-12.62	1
188			min	-22.068	2	-3.739	8	0	1	-3.349	2	0	1	-21.034	4
189		5	max	198.375	8	-4.487	3	0	1	50.645	5	0	1	0	1
190			min	-22.068	2	-7.479	8	0	1	-3.349	2	0	1	0	1
191	M87	1	max	198.375	8	7.479	10	0	1	39.847	3	0	1	0	1
192			min	-22.068	2	4.487	3	0	1	-35.227	8	0	1	0	1
193		2	max	198.375	8	3.739	10	0	1	39.847	3	0	1	-12.62	3
194			min	-22.068	2	2.244	3	0	1	-35.227	8	0	1	-21.034	10
195		3	max	198.375	8	0	1	0	1	39.847	3	0	1	-16.827	3
196			min	-22.068	2	0	1	0	1	-35.227	8	0	1	-28.045	10
197		4	max	198.375	8	-2.244	2	0	1	39.847	3	0	1	-12.62	3
198			min	-22.068	2	-3.739	5	0	1	-35.227	8	0	1	-21.034	10
199		5	max	198.375	8	-4.487	2	0	1	39.847	3	0	1	0	1
200			min	-22.068	2	-7.479	5	0	1	-35.227	8	0	1	0	1
201	M91	1	max	194.58	8	7.479	9	0	1	31.713	2	0	1	0	1
202			min	-10.268	5	4.487	3	0	1	-90.809	5	0	1	0	1
203		2	max	194.58	8	3.739	9	0	1	31.713	2	0	1	-12.62	3
204			min	-10.268	5	2.244	3	0	1	-90.809	5	0	1	-21.034	9
205		3	max	194.58	8	0	1	0	1	31.713	2	0	1	-16.827	3
206			min	-10.268	5	0	1	0	1	-90.809	5	0	1	-28.045	9
207		4	max	194.58	8	-2.244	2	0	1	31.713	2	0	1	-12.62	3
208			min	-10.268	5	-3.739	5	0	1	-90.809	5	0	1	-21.034	9
209		5	max	194.58	8	-4.487	2	0	1	31.713	2	0	1	0	1
210			min	-10.268	5	-7.479	5	0	1	-90.809	5	0	1	0	1
211	M115	1	max	194.58	8	7.479	4	0	1	31.947	8	0	1	0	1
212			min	-21.652	5	4.487	2	0	1	-52.884	3	0	1	0	1
213		2	max	194.58	8	3.739	4	0	1	31.947	8	0	1	-12.62	2
214			min	-21.652	5	2.244	2	0	1	-52.884	3	0	1	-21.034	4
215		3	max	194.58	8	0	1	0	1	31.947	8	0	1	-16.827	2
216			min	-21.652	5	0	1	0	1	-52.884	3	0	1	-28.045	4
217		4	max	194.58	8	-2.244	1	0	1	31.947	8	0	1	-12.62	2
218			min	-21.652	5	-3.739	8	0	1	-52.884	3	0	1	-21.034	4
219		5	max	194.58	8	-4.487	1	0	1	31.947	8	0	1	0	1
220			min	-21.652	5	-7.479	8	0	1	-52.884	3	0	1	0	1
221	M110	1	max	147.327	8	7.479	4	0	1	48.982	5	0	1	0	1
222			min	-37.66	2	4.487	2	0	1	-30.022	2	0	1	0	1
223		2	max	147.327	8	3.739	4	0	1	48.982	5	0	1	-12.62	2
224			min	-37.66	2	2.244	2	0	1	-30.022	2	0	1	-21.034	4
225		3	max	147.327	8	0	1	0	1	48.982	5	0	1	-16.827	2
226			min	-37.66	2	0	1	0	1	-30.022	2	0	1	-28.045	4
227		4	max	147.327	8	-2.244	1	0	1	48.982	5	0	1	-12.62	2

4680



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 60x60'

Aug 22, 2016
 6:41 PM
 Checked By: _____

Envelope Member Section Forces (Continued)

Member	Sec		Axial(lb)	LC	y Shear(lb)	LC	z Shear(lb)	LC	Torque(lb-ft)	LC	v-v Moment	LC	x-z Moment	LC
228		min	-37.66	2	-3.739	9	0	1	-30.022	2	0	1	-21.034	4
229		max	147.327	8	-4.467	1	0	1	48.962	5	0	1	0	1
230		min	-37.66	2	-7.479	9	0	1	-30.022	2	0	1	0	1
231	M98	max	147.327	8	7.479	8	0	1	37.814	1	0	1	0	1
232		min	-37.66	2	4.467	3	0	1	-15.754	9	0	1	0	1
233		max	147.327	8	3.739	8	0	1	37.814	1	0	1	-12.62	3
234		min	-37.66	2	2.244	3	0	1	-16.754	9	0	1	-21.034	8
235		max	147.327	8	0	1	0	1	37.814	1	0	1	-16.827	3
236		min	-37.66	2	0	1	0	1	-15.754	9	0	1	-28.045	6
237		max	147.327	8	-2.244	2	0	1	37.814	1	0	1	-12.62	3
238		min	-37.66	2	-3.739	5	0	1	-15.754	9	0	1	-21.034	8
239		max	147.327	8	-4.467	2	0	1	37.814	1	0	1	0	1
240		min	-37.66	2	-7.479	5	0	1	-15.754	9	0	1	0	1
241	M92	max	135.935	8	7.479	8	0	1	25.161	2	0	1	0	1
242		min	-16.421	9	4.467	3	0	1	-42.869	5	0	1	0	1
243		max	135.935	8	3.739	8	0	1	25.161	2	0	1	-12.62	3
244		min	-16.421	9	2.244	3	0	1	-42.869	5	0	1	-21.034	8
245		max	135.935	8	0	1	0	1	25.161	2	0	1	-16.827	3
246		min	-16.421	9	0	1	0	1	-42.869	5	0	1	-28.045	6
247		max	135.935	8	-2.244	2	0	1	25.161	2	0	1	-12.62	3
248		min	-16.421	9	-3.739	5	0	1	-42.869	5	0	1	-21.034	8
249		max	135.935	8	-4.467	2	0	1	25.161	2	0	1	0	1
250		min	-16.421	9	-7.479	5	0	1	-42.869	5	0	1	0	1
251	M116	max	135.935	8	7.479	4	0	1	13.108	9	0	1	0	1
252		min	-36.585	5	4.467	2	0	1	-32.692	1	0	1	0	1
253		max	135.935	8	3.739	4	0	1	13.108	9	0	1	-12.62	2
254		min	-36.585	5	2.244	2	0	1	-32.692	1	0	1	-21.034	4
255		max	135.935	8	0	1	0	1	13.108	9	0	1	-16.827	2
256		min	-36.585	5	0	1	0	1	-32.692	1	0	1	-28.045	4
257		max	135.935	8	-2.244	3	0	1	13.108	9	0	1	-12.62	2
258		min	-36.585	5	-3.739	8	0	1	-32.692	1	0	1	-21.034	4
259		max	135.935	8	-4.467	3	0	1	13.108	9	0	1	0	1
260		min	-36.585	5	-7.479	8	0	1	-32.692	1	0	1	0	1
261	M99	max	94.637	8	7.479	4	0	1	.998	1	0	1	0	1
262		min	-45.114	2	4.467	1	0	1	-.321	9	0	1	0	1
263		max	94.637	8	3.739	4	0	1	.998	1	0	1	-12.62	1
264		min	-45.114	2	2.244	1	0	1	-.321	9	0	1	-21.034	4
265		max	94.637	8	0	1	0	1	.998	1	0	1	-16.827	1
266		min	-45.114	2	0	1	0	1	-.321	9	0	1	-28.045	4
267		max	94.637	8	-2.244	1	0	1	.998	1	0	1	-12.62	1
268		min	-45.114	2	-3.739	4	0	1	-.321	9	0	1	-21.034	4
269		max	94.637	8	-4.467	1	0	1	.998	1	0	1	0	1
270		min	-45.114	2	-7.479	4	0	1	-.321	9	0	1	0	1
271	M111	max	94.637	8	7.479	4	0	1	1.423	5	0	1	0	1
272		min	-45.114	2	4.467	1	0	1	-.612	2	0	1	0	1
273		max	94.637	8	3.739	4	0	1	1.423	5	0	1	-12.62	1
274		min	-45.114	2	2.244	1	0	1	-.612	2	0	1	-21.034	4
275		max	94.637	8	0	1	0	1	1.423	5	0	1	-16.827	1
276		min	-45.114	2	0	1	0	1	-.612	2	0	1	-28.045	4
277		max	94.637	8	-2.244	1	0	1	1.423	5	0	1	-12.62	1
278		min	-45.114	2	-3.739	4	0	1	-.612	2	0	1	-21.034	4
279		max	94.637	8	-4.467	1	0	1	1.423	5	0	1	0	1
280		min	-45.114	2	-7.479	4	0	1	-.612	2	0	1	0	1
281	M117	max	80.88	8	7.479	4	0	1	.25	9	0	1	0	1
282		min	-43.687	5	4.467	1	0	1	-.976	1	0	1	0	1
283		max	80.88	8	3.739	4	0	1	.25	9	0	1	-12.62	1
284		min	-43.687	5	2.244	1	0	1	-.976	1	0	1	-21.034	4

47 81

Envelope Member Section Forces (Continued)

Member	Sec		Axial(lb)	LC	y Shear(lb)	LC	z Shear(lb)	LC	Torque(lb-ft)	LC	y-y Moment	LC	z-z Moment	LC	
285	3	max	80.89	8	0	1	0	1	.25	8	0	1	-16.827	1	
286		min	-43.887	5	0	1	0	1	-.978	1	0	1	-28.045	4	
287	4	max	80.89	8	-2.244	1	0	1	.25	9	0	1	-12.62	1	
288		min	-43.887	5	-3.739	4	0	1	-.978	1	0	1	-21.034	4	
289	5	max	80.89	8	-4.487	1	0	1	.25	9	0	1	0	1	
290		min	-43.887	5	-7.479	4	0	1	-.978	1	0	1	0	1	
291	M83	1	max	80.89	8	7.479	4	0	1	.479	2	0	1	0	1
292		min	-19.495	9	4.487	1	0	1	-1.481	5	0	1	0	1	
293	2	max	80.89	8	3.739	4	0	1	.479	2	0	1	-12.62	1	
294		min	-19.495	9	2.244	1	0	1	-1.481	5	0	1	-21.034	4	
295	3	max	80.89	8	0	1	0	1	.479	2	0	1	-16.827	1	
296		min	-19.495	9	0	1	0	1	-1.481	5	0	1	-28.045	4	
297	4	max	80.89	8	-2.244	1	0	1	.479	2	0	1	-12.62	1	
298		min	-19.495	9	-3.739	4	0	1	-1.481	5	0	1	-21.034	4	
299	5	max	80.89	8	-4.487	1	0	1	.479	2	0	1	0	1	
300		min	-19.495	9	-7.479	4	0	1	-1.481	5	0	1	0	1	
301	M114	1	max	25.327	6	7.479	9	0	1	29.951	8	0	1	0	1
302		min	-77.12	8	4.487	3	0	1	-50.845	5	0	1	0	1	
303	2	max	25.327	6	3.739	9	0	1	29.951	8	0	1	-12.62	3	
304		min	-77.12	8	2.244	3	0	1	-50.845	5	0	1	-21.034	9	
305	3	max	25.327	6	0	1	0	1	29.951	8	0	1	-16.827	3	
306		min	-77.12	8	0	1	0	1	-50.845	5	0	1	-28.045	9	
307	4	max	25.327	6	-2.244	1	0	1	29.951	8	0	1	-12.62	3	
308		min	-77.12	8	-3.739	4	0	1	-50.845	5	0	1	-21.034	9	
309	5	max	25.327	6	-4.487	1	0	1	29.951	8	0	1	0	1	
310		min	-77.12	8	-7.479	4	0	1	-50.845	5	0	1	0	1	
311	M102	1	max	21.607	5	7.479	5	0	1	6.221	10	0	1	0	1
312		min	-77.12	8	4.487	2	0	1	-39.847	3	0	1	0	1	
313	2	max	21.607	5	3.739	5	0	1	6.221	10	0	1	-12.62	2	
314		min	-77.12	8	2.244	2	0	1	-39.847	3	0	1	-21.034	5	
315	3	max	21.607	5	0	1	0	1	6.221	10	0	1	-16.827	2	
316		min	-77.12	8	0	1	0	1	-39.847	3	0	1	-28.045	5	
317	4	max	21.607	5	-2.244	3	0	1	6.221	10	0	1	-12.62	2	
318		min	-77.12	8	-3.739	8	0	1	-39.847	3	0	1	-21.034	5	
319	5	max	21.607	5	-4.487	3	0	1	6.221	10	0	1	0	1	
320		min	-77.12	8	-7.479	8	0	1	-39.847	3	0	1	0	1	
321	M98	1	max	21.783	1	7.479	5	0	1	90.809	5	0	1	0	1
322		min	-72.845	8	4.487	2	0	1	-31.713	2	0	1	0	1	
323	2	max	21.783	1	3.739	5	0	1	90.809	5	0	1	-12.62	2	
324		min	-72.845	8	2.244	2	0	1	-31.713	2	0	1	-21.034	4	
325	3	max	21.783	1	0	1	0	1	90.809	5	0	1	-16.827	2	
326		min	-72.845	8	0	1	0	1	-31.713	2	0	1	-28.045	4	
327	4	max	21.783	1	-2.244	3	0	1	90.809	5	0	1	-12.62	2	
328		min	-72.845	8	-3.739	8	0	1	-31.713	2	0	1	-21.034	4	
329	5	max	21.783	1	-4.487	3	0	1	90.809	5	0	1	0	1	
330		min	-72.845	8	-7.479	8	0	1	-31.713	2	0	1	0	1	
331	M120	1	max	19.454	2	7.479	8	0	1	52.884	3	0	1	0	1
332		min	-72.845	8	4.487	1	0	1	-13.514	10	0	1	0	1	
333	2	max	19.454	2	3.739	8	0	1	52.884	3	0	1	-12.62	1	
334		min	-72.845	8	2.244	1	0	1	-13.514	10	0	1	-21.034	8	
335	3	max	19.454	2	0	1	0	1	52.884	3	0	1	-16.827	1	
336		min	-72.845	8	0	1	0	1	-13.514	10	0	1	-28.045	8	
337	4	max	19.454	2	-2.244	2	0	1	52.884	3	0	1	-12.62	1	
338		min	-72.845	8	-3.739	4	0	1	-13.514	10	0	1	-21.034	8	
339	5	max	19.454	2	-4.487	2	0	1	52.884	3	0	1	0	1	
340		min	-72.845	8	-7.479	4	0	1	-13.514	10	0	1	0	1	
341	M112	1	max	47.849	5	7.479	4	0	1	812	2	0	1	0	1

48
82



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 60x80'

Aug 22, 2016
 8:41 PM
 Checked By: _____

Envelope Member Section Forces (Continued)

Member	Sec		Axial(lb)	LC	y Shear(lb)	LC	z Shear(lb)	LC	Torsion(lb-ft)	LC	y-y Momen	LC	z-z Momen	LC
342		min	-45.114	2	4.487	1	0	1	-1.423	5	0	1	0	1
343		max	47.848	5	3.739	4	0	1	.812	2	0	1	-12.62	1
344		min	-45.114	2	2.244	1	0	1	-1.423	5	0	1	-21.034	4
345		max	47.848	5	0	1	0	1	.812	2	0	1	-16.827	1
346		min	-45.114	2	0	1	0	1	-1.423	5	0	1	-28.045	4
347		max	47.848	5	-2.244	1	0	1	.812	2	0	1	-12.62	1
348		min	-45.114	2	-3.739	4	0	1	-1.423	5	0	1	-21.034	4
349		max	47.848	5	-4.487	1	0	1	.812	2	0	1	0	1
350		min	-45.114	2	-7.479	4	0	1	-1.423	5	0	1	0	1
351	M100	max	40.027	8	7.479	4	0	1	.815	8	0	1	0	1
352		min	-45.114	2	4.487	1	0	1	-.998	1	0	1	0	1
353		max	40.027	9	3.739	4	0	1	.815	8	0	1	-12.62	1
354		min	-45.114	2	2.244	1	0	1	-.998	1	0	1	-21.034	4
355		max	40.027	8	0	1	0	1	.815	8	0	1	-16.827	1
356		min	-45.114	2	0	1	0	1	-.998	1	0	1	-28.045	4
357		max	40.027	8	-2.244	1	0	1	.815	8	0	1	-12.62	1
358		min	-45.114	2	-3.739	4	0	1	-.998	1	0	1	-21.034	4
359		max	40.027	8	-4.487	1	0	1	.815	8	0	1	0	1
360		min	-45.114	2	-7.479	4	0	1	-.998	1	0	1	0	1
361	M116	max	37.488	2	7.479	4	0	1	.976	1	0	1	0	1
362		min	-43.887	5	-4.487	1	0	1	-.633	8	0	1	0	1
363		max	37.488	2	3.739	4	0	1	.976	1	0	1	-12.62	1
364		min	-43.887	5	2.244	1	0	1	-.633	8	0	1	-21.034	4
365		max	37.488	2	0	1	0	1	.976	1	0	1	-16.827	1
366		min	-43.887	5	0	1	0	1	-.633	8	0	1	-28.045	4
367		max	37.488	2	-2.244	1	0	1	.976	1	0	1	-12.62	1
368		min	-43.887	5	-3.739	4	0	1	-.633	8	0	1	-21.034	4
369		max	37.488	2	-4.487	1	0	1	.976	1	0	1	0	1
370		min	-43.887	5	-7.479	4	0	1	-.633	8	0	1	0	1
371	M113	max	40.841	5	7.479	8	0	1	30.022	2	0	1	0	1
372		min	-37.66	2	4.487	1	0	1	-48.982	5	0	1	0	1
373		max	40.841	5	3.739	8	0	1	30.022	2	0	1	-12.62	1
374		min	-37.66	2	2.244	1	0	1	-48.982	5	0	1	-21.034	8
375		max	40.841	5	0	1	0	1	30.022	2	0	1	-16.827	1
376		min	-37.66	2	0	1	0	1	-48.982	5	0	1	-28.045	8
377		max	40.841	5	-2.244	2	0	1	30.022	2	0	1	-12.62	1
378		min	-37.66	2	-3.739	4	0	1	-48.982	5	0	1	-21.034	8
379		max	40.841	5	-4.487	2	0	1	30.022	2	0	1	0	1
380		min	-37.66	2	-7.479	4	0	1	-48.982	5	0	1	0	1
381	M84	max	40.26	1	7.479	4	0	1	1.481	5	0	1	0	1
382		min	-19.495	9	4.487	1	0	1	-.479	2	0	1	0	1
383		max	40.26	1	3.739	4	0	1	1.481	5	0	1	-12.62	1
384		min	-19.495	9	2.244	1	0	1	-.479	2	0	1	-21.034	4
385		max	40.26	1	0	1	0	1	1.481	5	0	1	-16.827	1
386		min	-19.495	9	0	1	0	1	-.479	2	0	1	-28.045	4
387		max	40.26	1	-2.244	1	0	1	1.481	5	0	1	-12.62	1
388		min	-19.495	9	-3.739	4	0	1	-.479	2	0	1	-21.034	4
389		max	40.26	1	-4.487	1	0	1	1.481	5	0	1	0	1
390		min	-19.495	9	-7.479	4	0	1	-.479	2	0	1	0	1
391	M101	max	32.509	5	7.479	5	0	1	38.854	8	0	1	0	1
392		min	-37.66	2	4.487	2	0	1	-37.814	1	0	1	0	1
393		max	32.509	5	3.739	5	0	1	38.854	8	0	1	-12.62	2
394		min	-37.66	2	2.244	2	0	1	-37.814	1	0	1	-21.034	5
395		max	32.509	5	0	1	0	1	38.854	8	0	1	-16.827	2
396		min	-37.66	2	0	1	0	1	-37.814	1	0	1	-28.045	5
397		max	32.509	5	-2.244	3	0	1	38.854	8	0	1	-12.62	2
398		min	-37.66	2	-3.739	10	0	1	-37.814	1	0	1	-21.034	5

49 83

Envelope Member Section Forces (Continued)

Member	Sec		Axial(lb)	LC	y Shear(lb)	LC	x Shear(lb)	LC	Torque(lb-ft)	LC	y-y Moment	LC	z-z Moment	LC	
399	5	max	32.609	5	-4.487	3	0	1	38.654	8	0	1	0	1	
400		min	-37.68	2	-7.479	10	0	1	-37.814	1	0	1	0	1	
401	M119	1	max	31.702	2	7.479	8	0	1	32.892	1	0	1	0	1
402		min	-36.585	5	4.487	3	0	1	-32.04	8	0	1	0	1	
403		2	max	31.702	2	3.739	8	0	1	32.892	1	0	1	-12.82	3
404		min	-36.585	5	-2.244	3	0	1	-32.04	8	0	1	-21.034	8	
405		3	max	31.702	2	0	1	0	1	32.892	1	0	1	-16.827	3
408		min	-36.585	5	0	1	0	1	-32.04	8	0	1	-28.045	8	
407		4	max	31.702	2	-2.244	2	0	1	32.892	1	0	1	-12.82	3
408		min	-36.585	5	-3.739	4	0	1	-32.04	8	0	1	-21.034	8	
409		5	max	31.702	2	-4.487	2	0	1	32.892	1	0	1	0	1
410		min	-36.585	5	-7.479	4	0	1	-32.04	8	0	1	0	1	
411	M95	1	max	34.318	1	7.479	5	0	1	42.889	5	0	1	0	1
412		min	-22.728	8	-4.487	2	0	1	-25.161	2	0	1	0	1	
413		2	max	34.318	1	3.739	5	0	1	42.889	5	0	1	-12.82	2
414		min	-22.728	8	-2.244	2	0	1	-25.161	2	0	1	-21.034	5	
415		3	max	34.318	1	0	1	0	1	42.889	5	0	1	-16.827	2
416		min	-22.728	8	0	1	0	1	-25.161	2	0	1	-28.045	5	
417		4	max	34.318	1	-2.244	3	0	1	42.889	5	0	1	-12.82	2
418		min	-22.728	8	-3.739	9	0	1	-25.161	2	0	1	-21.034	5	
419		5	max	34.318	1	-4.487	3	0	1	42.889	5	0	1	0	1
420		min	-22.728	8	-7.479	9	0	1	-25.161	2	0	1	0	1	

MAXIMUM PUELIN COMPRESSION

$$C = 669 \text{ lb} \quad \ell = 15' \quad \frac{K\ell}{r} = \frac{15(12)}{1.849} = 212$$

$$F_a = \frac{51,100}{212^2} = 1,137 \text{ psi}$$

$$\frac{P}{F_a} = \frac{212}{1,137} = .18 \leq 1.0$$

OKAY

5084



Company : MacIntosh & MacIntosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 50x90

Aug 22, 2016
 2:37 PM
 Checked By: _____

Envelope Member Section Forces

X-BEAM

Member	Sec	LC	Axial(lb)	LC	y Shear(lb)	LC	x Shear(lb)	LC	Torsion(lb-ft)	LC	yy Moment	LC	zz Moment	LC
1	M127	1	max 0	5	.772	8	0	1	.006	3	0	1	0	1
2			min -1055.372	5	0	5	0	1	0	8	0	1	0	1
3		2	max 0	5	.388	8	0	1	.006	3	0	1	0	5
4			min -1055.829	5	0	5	0	1	0	8	0	1	-2.808	8
5		3	max 0	5	0	1	0	1	.006	3	0	1	0	5
6			min -1055.888	5	0	1	0	1	0	8	0	1	-3.477	8
7		4	max 0	5	0	5	0	1	.006	3	0	1	0	5
8			min -1058.143	8	-.388	4	0	1	0	8	0	1	-2.808	8
9		5	max 0	5	0	5	0	1	.006	3	0	1	0	1
10			min -1058.401	8	-.772	4	0	1	0	8	0	1	0	1
11	M128	1	max 0	1	.772	9	0	1	.002	9	0	1	0	1
12			min -11.001	9	0	1	0	1	0	1	0	1	0	1
13		2	max 0	1	.388	9	0	1	.002	9	0	1	0	1
14			min -11.259	9	0	1	0	1	0	1	0	1	-2.808	9
15		3	max 0	1	0	1	0	1	.002	9	0	1	0	1
16			min -11.518	9	0	1	0	1	0	1	0	1	-3.477	9
17		4	max 0	1	0	1	0	1	.002	9	0	1	0	1
18			min -11.773	9	-.388	10	0	1	0	1	0	1	-2.808	9
19		5	max 0	1	0	1	0	1	.002	9	0	1	0	1
20			min -12.09	9	-.772	10	0	1	0	1	0	1	0	1
21	M129	1	max 0	1	1.5	10	0	1	0	10	0	1	0	1
22			min -282.083	9	0	1	0	1	-.006	5	0	1	0	1
23		2	max 0	1	.75	10	0	1	0	10	0	1	0	1
24			min -282.333	9	0	1	0	1	-.006	5	0	1	-8.714	10
25		3	max 0	1	0	1	0	1	0	10	0	1	0	1
26			min -282.603	9	0	1	0	1	-.006	5	0	1	-11.818	10
27		4	max 0	1	0	1	0	1	0	10	0	1	0	1
28			min -282.873	9	-.75	7	0	1	-.006	5	0	1	-8.714	10
29		5	max 0	1	0	1	0	1	0	10	0	1	0	1
30			min -283.143	9	-1.5	7	0	1	-.006	5	0	1	0	1
31	M130	1	max 0	5	1.5	8	0	1	.007	3	0	1	0	1
32			min -873.784	4	0	5	0	1	0	2	0	1	0	1
33		2	max 0	5	.75	8	0	1	.007	3	0	1	0	5
34			min -873.948	1	0	5	0	1	0	2	0	1	-8.714	8
35		3	max 0	5	0	1	0	1	.007	3	0	1	0	5
36			min -874.108	1	0	1	0	1	0	2	0	1	-11.818	8
37		4	max 0	5	0	5	0	1	.007	3	0	1	0	5
38			min -874.27	1	-.75	4	0	1	0	2	0	1	-8.714	8
39		5	max 0	5	0	5	0	1	.007	3	0	1	0	1
40			min -874.432	1	-1.5	4	0	1	0	2	0	1	0	1
41	M131	1	max 0	3	.772	8	0	1	.002	1	0	1	0	1
42			min -1055.372	8	0	3	0	1	-.001	2	0	1	0	1
43		2	max 0	3	.388	8	0	1	.002	1	0	1	0	3
44			min -1055.829	8	0	3	0	1	-.001	2	0	1	-2.808	8
45		3	max 0	3	0	1	0	1	.002	1	0	1	0	3
46			min -1055.888	8	0	1	0	1	-.001	2	0	1	-3.477	8
47		4	max 0	3	0	3	0	1	.002	1	0	1	0	3
48			min -1058.143	8	-.388	8	0	1	-.001	2	0	1	-2.808	8
49		5	max 0	3	0	3	0	1	.002	1	0	1	0	1
50			min -1058.401	8	-.772	8	0	1	-.001	2	0	1	0	1
51	M132	1	max 0	1	.772	10	0	1	0	1	0	1	0	1
52			min -37.888	5	0	1	0	1	-.015	5	0	1	0	1
53		2	max 0	1	.388	10	0	1	0	1	0	1	0	1
54			min -37.925	5	0	1	0	1	-.015	5	0	1	-2.808	10
55		3	max 0	1	0	1	0	1	0	1	0	1	0	1
56			min -38.183	5	0	1	0	1	-.015	5	0	1	-3.477	10

585



Company : Mackintosh & Mackintosh, Inc.
 Designer : H Robson
 Job Number : 2016-0021
 Model Name : ESPAN 60x90'

Aug 22, 2016
 6:37 PM
 Checked By: _____

Envelope Member Section Forces (Continued)

Member	Sec		Axial(lb)	LC	y Shear(lb)	LC	z Shear(lb)	LC	Torque(lb-ft)	LC	y-y Momen...	LC	z-z Momen...	LC	
57		4	max	0	1	0	1	0	1	0	1	0	1	0	1
58			min	-38.44	5	-386	5	0	1	-015	5	0	1	-2.608	10
59		5	max	0	1	0	1	0	1	0	1	0	1	0	1
60			min	-38.697	5	-772	5	0	1	-015	5	0	1	0	1
61	M133	1	max	0	1	1.5	5	0	1	0	10	0	1	0	1
62			min	-854.994	5	0	1	0	1	-006	3	0	1	0	1
63		2	max	0	1	.75	5	0	1	0	10	0	1	0	1
64			min	-854.984	5	0	1	0	1	-006	3	0	1	-8.714	5
65		3	max	0	1	0	1	0	1	0	10	0	1	0	1
66			min	-854.934	5	0	1	0	1	-006	3	0	1	-11.618	5
67		4	max	0	1	0	1	0	1	0	10	0	1	0	1
68			min	-855.204	5	-75	4	0	1	-006	3	0	1	-8.714	5
69		5	max	0	1	0	1	0	1	0	10	0	1	0	1
70			min	-855.474	5	-1.5	4	0	1	-006	3	0	1	0	1
71	M134	1	max	0	3	1.5	8	0	1	.002	1	0	1	0	1
72			min	-552.382	2	0	3	0	1	0	8	0	1	0	1
73		2	max	0	3	.75	8	0	1	.002	1	0	1	0	3
74			min	-552.544	2	0	3	0	1	0	8	0	1	-8.714	8
75		3	max	0	3	0	1	0	1	.002	1	0	1	0	3
76			min	-552.706	2	0	1	0	1	0	8	0	1	-11.618	8
77		4	max	0	3	0	3	0	1	.002	1	0	1	0	3
78			min	-552.868	2	-75	8	0	1	0	8	0	1	-8.714	8
79		5	max	0	3	0	3	0	1	.002	1	0	1	0	1
80			min	-553.03	2	-1.5	8	0	1	0	8	0	1	0	1
81	M135	1	max	0	1	.772	8	0	1	.002	8	0	1	0	1
82			min	-1023.018	8	0	1	0	1	-002	9	0	1	0	1
83		2	max	0	1	.386	8	0	1	.002	8	0	1	0	1
84			min	-1023.278	8	0	1	0	1	-002	9	0	1	-2.608	8
85		3	max	0	1	0	1	0	1	.002	8	0	1	0	1
86			min	-1023.538	8	0	1	0	1	-002	9	0	1	-3.477	8
87		4	max	0	1	0	1	0	1	.002	8	0	1	0	1
88			min	-1023.79	8	-386	8	0	1	-002	9	0	1	-2.608	8
89		5	max	0	1	0	1	0	1	.002	8	0	1	0	1
90			min	-1024.047	8	-772	8	0	1	-002	9	0	1	0	1
91	M136	1	max	0	5	.772	4	0	1	0	5	0	1	0	1
92			min	-40.218	1	0	5	0	1	-006	3	0	1	0	1
93		2	max	0	5	.386	4	0	1	0	5	0	1	0	5
94			min	-40.373	1	0	5	0	1	-006	3	0	1	-2.608	4
95		3	max	0	5	0	1	0	1	0	5	0	1	0	5
96			min	-40.527	1	0	1	0	1	-006	3	0	1	-3.477	4
97		4	max	0	5	0	5	0	1	0	5	0	1	0	5
98			min	-40.681	1	-386	4	0	1	-006	3	0	1	-2.608	4
99		5	max	0	5	0	5	0	1	0	5	0	1	0	1
100			min	-40.836	1	-772	4	0	1	-006	3	0	1	0	1
101	M137	1	max	0	5	1.5	4	0	1	0	2	0	1	0	1
102			min	-673.784	1	0	5	0	1	-007	3	0	1	0	1
103		2	max	0	5	.75	4	0	1	0	2	0	1	0	5
104			min	-673.946	1	0	5	0	1	-007	3	0	1	-8.714	4
105		3	max	0	5	0	1	0	1	0	2	0	1	0	5
106			min	-674.108	1	0	1	0	1	-007	3	0	1	-11.618	4
107		4	max	0	5	0	5	0	1	0	2	0	1	0	5
108			min	-674.27	1	-75	6	0	1	-007	3	0	1	-8.714	4
109		5	max	0	5	0	5	0	1	0	2	0	1	0	1
110			min	-674.432	1	-1.5	6	0	1	-007	3	0	1	0	1
111	M138	1	max	0	1	1.5	7	0	1	.006	5	0	1	0	1
112			min	-729.118	8	0	1	0	1	0	10	0	1	0	1
113		2	max	0	1	.75	7	0	1	.006	5	0	1	0	1

57
86



Envelope Member Section Forces (Continued)

Member	Sec		Axial [k]	LC	v Shear [k]	LC	z Shear [k]	LC	Torsion [k-ft]	LC	y-y Moment [k-ft]	LC	x-z Moment [k-ft]	LC
114		min	-729.388	8	0	1	0	1	0	10	0	1	-8.714	7
115		max	0	1	0	1	0	1	.008	5	0	1	0	1
116		min	-729.668	8	0	1	0	1	0	10	0	1	-11.818	7
117		max	0	1	0	1	0	1	.008	5	0	1	0	1
118		min	-729.928	8	-75	9	0	1	0	10	0	1	-8.714	7
119		max	0	1	0	1	0	1	.008	5	0	1	0	1
120		min	-730.198	8	-1.5	9	0	1	0	10	0	1	0	1
121	M139	max	0	3	.483	2	0	1	.001	2	0	1	0	1
122		min	-36.548	2	0	3	0	1	-.002	1	0	1	0	1
123		max	0	3	.231	2	0	1	.001	2	0	1	0	3
124		min	-36.702	2	0	3	0	1	-.002	1	0	1	-1.685	2
125		max	0	3	0	1	0	1	.001	2	0	1	0	3
126		min	-36.856	2	0	1	0	1	-.002	1	0	1	-2.089	2
127		max	0	3	0	3	0	1	.001	2	0	1	0	3
128		min	-37.01	2	-.231	1	0	1	-.002	1	0	1	-1.685	2
129		max	0	3	0	3	0	1	.001	2	0	1	0	1
130		min	-37.165	2	-.483	1	0	1	-.002	1	0	1	0	1
131	M140	max	0	1	.772	8	0	1	.015	5	0	1	0	1
132		min	-1023.018	8	0	1	0	1	-.002	8	0	1	0	1
133		max	0	1	.386	8	0	1	.015	5	0	1	0	1
134		min	-1023.278	8	0	1	0	1	-.002	8	0	1	-2.808	8
135		max	0	1	0	1	0	1	.015	5	0	1	0	1
136		min	-1023.538	8	0	1	0	1	-.002	8	0	1	-3.477	8
137		max	0	1	0	1	0	1	.015	5	0	1	0	1
138		min	-1023.79	8	-.386	7	0	1	-.002	8	0	1	-2.808	8
139		max	0	1	0	1	0	1	.015	5	0	1	0	1
140		min	-1024.047	8	-.772	7	0	1	-.002	8	0	1	0	1
141	M141	max	0	1	1.5	6	0	1	.006	3	0	1	0	1
142		min	-854.394	5	0	1	0	1	0	8	0	1	0	1
143		max	0	1	.76	6	0	1	.006	3	0	1	0	1
144		min	-854.684	5	0	1	0	1	0	8	0	1	-8.714	6
145		max	0	1	0	1	0	1	.006	3	0	1	0	1
146		min	-854.934	5	0	1	0	1	0	8	0	1	-11.818	6
147		max	0	1	0	1	0	1	.008	3	0	1	0	1
148		min	-855.204	5	-.75	7	0	1	0	8	0	1	-8.714	6
149		max	0	1	0	1	0	1	.006	3	0	1	0	1
150		min	-855.474	5	-1.5	7	0	1	0	8	0	1	0	1
151	M142	max	0	3	.9	2	0	1	0	3	0	1	0	1
152		min	-552.382	2	0	3	0	1	-.002	1	0	1	0	1
153		max	0	3	.45	2	0	1	0	3	0	1	0	3
154		min	-552.544	2	0	3	0	1	-.002	1	0	1	-5.228	2
155		max	0	3	0	1	0	1	0	3	0	1	0	3
156		min	-552.706	2	0	1	0	1	-.002	1	0	1	-6.971	2
157		max	0	3	0	3	0	1	0	3	0	1	0	3
158		min	-552.868	2	-.45	1	0	1	-.002	1	0	1	-5.228	2
159		max	0	3	0	3	0	1	0	3	0	1	0	1
160		min	-553.03	2	-.9	1	0	1	-.002	1	0	1	0	1

MAXIMUM TENSION = 1,055 lb
OKAY

5387

6 x 19 CLASS WIRE ROPE

Purple Plus or Purple Grade
Regular or Lang Lay IWRC or Fiber Core


Technical data for the following constructions in the 6 x 19 Class are listed below.

6 x 19 Seale • 6 x 19 Warrington • 6 x 21 filler wire Type U •
6 x 21 Seale • 6 x 26 filler wire Type W •
6 x 26 Type A


Rope Diam, in.	Approx Weight per ft. lb		Breaking Strength, tone of 2000 lb*			
			Purple Plus		Purple Grade	
	Fiber Core	IWRC	Fiber Core**	IWRC	Fiber Core	IWRC
1/4	0.105	0.116	3.02	3.40	2.74	2.94
5/16	.184	.180	4.89	5.27	4.26	4.58
3/8	.238	.260	6.71	7.55	6.10	6.58
7/16	.32	.35	9.08	10.2	8.27	8.89
1/2	.42	.46	11.8	13.3	10.7	11.5
5/8	.53	.59	14.9	16.8	13.5	14.5
3/4	.68	.72	18.3	20.6	16.7	17.9
7/8	.95	1.04	26.2	29.4	23.6	25.6
1	1.29	1.42	35.4	39.9	32.2	34.6
1 1/8	1.68	1.85	46.0	51.7	41.8	44.9
1 1/4	2.13	2.34	57.9	65.0	52.6	56.5
1 1/2	2.63	2.89	71.0	79.9	64.6	69.4
1 3/4	3.18	3.50	85.4	96.0	77.7	83.5
2	3.78	4.16	101	114	92	98.9
2 1/8	4.44	4.88	118	132	107	115
2 1/4	5.15	5.67	136	153	124	133
2 3/8	5.91	6.50	155	174	141	152
2 1/2	6.72	7.39	176	198	160	172
2 3/4	7.59	8.35	197	221	179	192
3	8.51	9.38	220	247	200	215
3 1/8	9.48	10.4	244	274	222	239
3 1/4	10.5	11.6	269	302	244	262
3 1/2	12.7	14.0	321	361	292	314

*When ropes are zinc-coated, deduct 10 per cent from bright rope strengths shown.


**Purple Plus ropes with fiber cores usually have higher breaking strengths than Purple Grade IWRC ropes, but are no substitute for them because of the many other factors to be considered in operating ropes.




6 x 21 filler wire Type U rope with IWRC and lang lay



6 x 21 Seale with fiber core



6 x 19 Seale with fiber core



6 x 19 Warrington with fiber core

54
9 88

2018-09-17

529

529 *Petition of Quicken Loans Inc, request to hold "Client Relations Operations Pep Rally" on September 27, 2018 from 5:00 PM to 8:00 PM at Comeica Field Parking lots with set up to begin on 9/25/18 and tear down complete on 9/28/18*

REFERRED TO THE FOLLOWING DEPARTMENT(S)

MAYOR'S OFFICE DPW - CITY ENGINEERING DIVISION
PLANNING AND DEVELOPMENT DEPARTMENT POLICE
DEPARTMENT
FIRE DEPARTMENT BUSINESS LICENSE CENTER