
### 14805 Faust









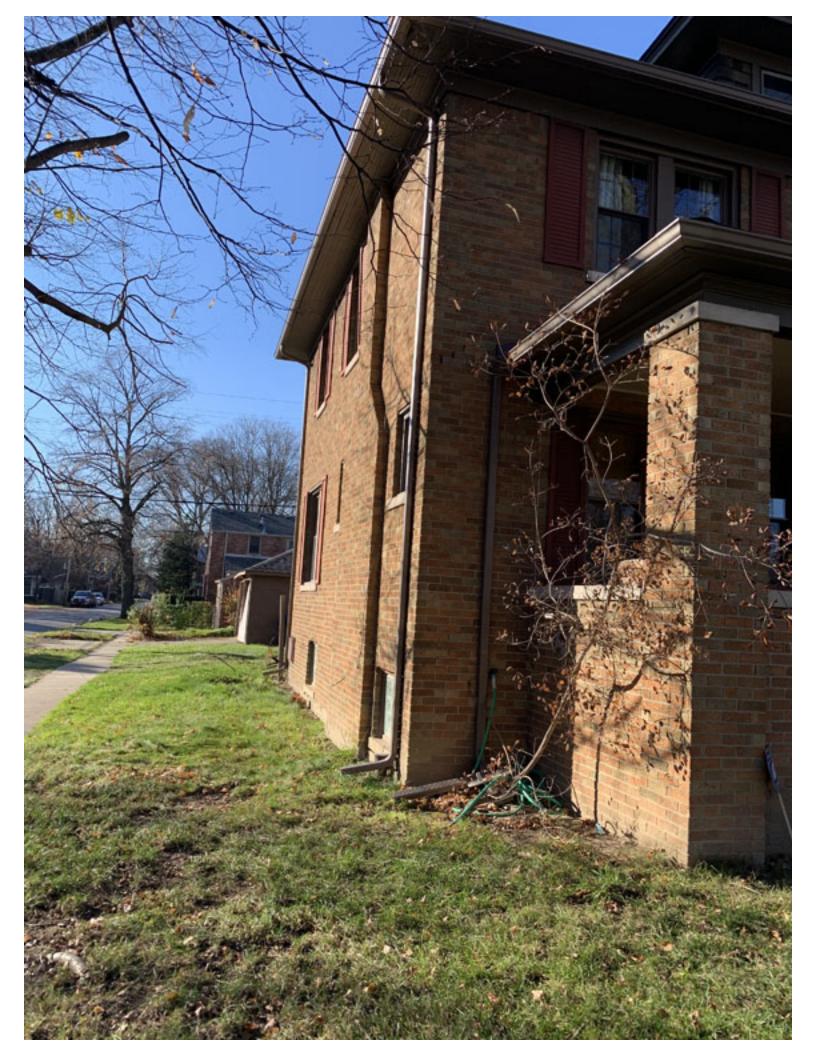












- Make selections in order shown Design, Window, Color and Construction.
- Available options may vary based on design, color and construction selections.
- Once all selections are complete save your door design to your favorites to share with others.

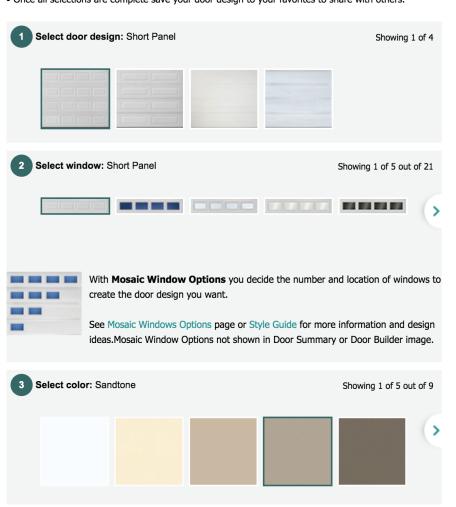



#### DOOR SUMMARY

**Door Design:** Short Panel **Windows:** Short Panel

Color: Sandtone

Construction\*: Stratford ST1000
Decorative Hardware: Amarr

Lock

\*Not shown in image.







# Encore


Siding



Life happens here.™

CertainTeed SAINT-GOBAIN



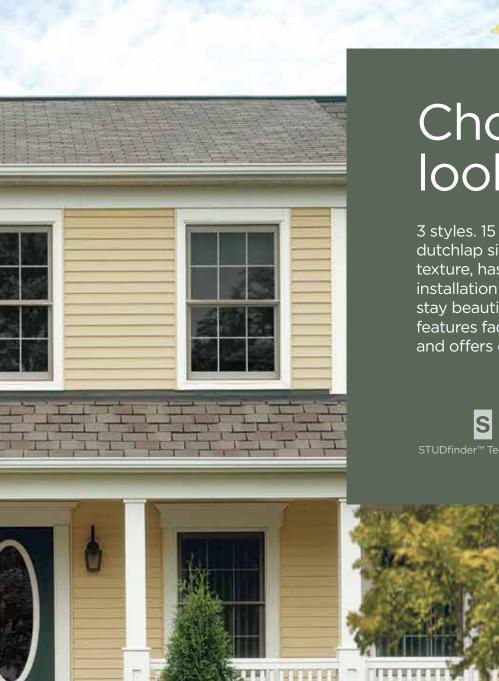

# Choose great looks that last.


3 styles. 15 colors. Encore™ clapboard and dutchlap siding, with its attractive woodgrain texture, has features that allow for precise installation on your home. Designed to stay beautiful with very little effort, Encore features fade-resistant colors, is very durable and offers exceptional value.










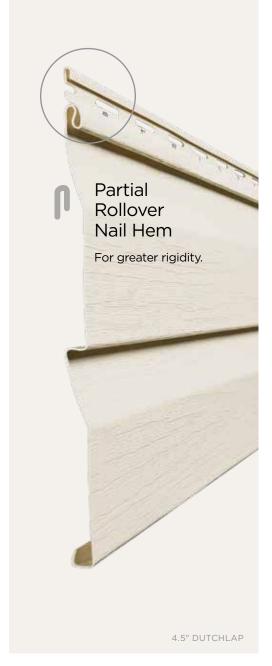


# 3 Styles. Great features.

Encore consists of traditional styles with European roots: Clapboard and Dutchlap. The Clapboard style is the most traditional and found in all parts of the United States. The Dutchlap style provides strong shadow lines and is highly popular in the Mid-Atlantic region.









# 15 Long-Lasting Colors



PermaColor<sup>™</sup> system assures color performance, resistance and durability. Encore siding has a special blend of resin, superior micro-ingredients and state-of-art pigment chemistry.



# Encore is better...



### ...for safety.

STUDfinder™ is an installation system with letters on the Encore panel nail hem to ensure proper nailing to wood studs, to protect you from unwanted dangers such as damaged pipes or wires, or exposed nails.







### ...for protection.

When installed with Encore siding, CertaWrap™ Weather Resistant Barrier is the added layer of protection against air and moisture damage.

### ...for peace of mind.



### Warranty

Encore has a lifetime limited warranty.



### **Trusted Brand**

CertainTeed siding is the brand preferred by building professionals and homeowners, from surveys conducted by national trade magazines. CertainTeed is an industry leader for over 100 years.



### Sustainable

CertainTeed vinyl siding offers significantly lower environmental impact than other cladding options.†

\*Based on life cycle assessment studies conducted through the National Institute of Standards and Technology (NIST)

### **Specification Sheet**



### **Encore**<sup>TM</sup>

### Vinyl Siding

General Description: Encore<sup>™</sup> siding provides the look of wood siding, but does not require the upkeep common to wood. Encore siding is available in a selection of profiles and finishes. It is appropriate for use in new construction for single family homes, multi-housing projects and light commercial developments. It is also ideal for remodeling.

**Styles:** 

Profile	Finish	Panel Projection (Nominal)	Wall Thickness	Lock Design	Colors	Accessory Pocket
Double 4" Clapboard	Woodgrain	1/2"	.040"	Post-formed	15	1/2", 5/8" or 3/4"
Double 5" Clapboard	Woodgrain	1/2"	.040"	Post-formed	15	1/2", 5/8" or 3/4"
Double 4½" Dutchlap	Woodgrain	1/2"	.040"	Post-formed	15	1/2", 5/8" or 3/4"

**Colors:** Encore siding profiles are available in the industry's widest selection of colors. All colors are Spectrophotometer controlled and utilize exclusive PermaColor color science.

Buckskin (41)*	Desert Tan (07)	Natural Clay (60)	Seagrass (30)
Castle Stone (37)	Heritage Cream (11)*	Oxford Blue (32)	Snow (31)
Colonial White (01)	Herringbone (04)	Sandstone Beige (15)	Sterling Gray (33)
Cypress (42)	Light Maple (55)	Savannah Wicker (59)	

<sup>\*</sup>not available in D5" profile

STUDfinder<sup>TM</sup>: The patented STUDfinder Installation System combines precisely engineered nail slot locations with graphics. Nail slots are positioned 16" on center to allow for alignment with studs. STUDfinder graphics centered at each slot provide a quick and easy guide to help locate studs.

**Accessories:** CertainTeed manufactures a wide range of siding accessories that are compatible with Encore siding styles and colors. Accessory products include installation components, soffit, window and door trim, corner lineals, corner systems and decorative moldings.

**Composition:** Encore siding products are produced using PVC resin.

**Technical Data:** Encore siding is in compliance with ASTM specification for Rigid Polyvinyl Chloride (PVC) Siding D 3679, and the requirements of section R703.11 of the International Residential Code, and section 1404.14 of the International Building Code. Encore siding meets or exceeds the properties noted in Table 1.

Table 1

ASTM E 84	Meets Class A flame spread requirements as tested according to ASTM E84.
ASTM D 635	Material is self-extinguishing with no measurable extent of burn when tested in accordance with this specification.
NFPA 268	Radiant Heat Test - Ignition Resistance of Exterior Walls - Conclusion that CertainTeed met the conditions for
	allowable use as specified in section 1406 of the International Building Code.

**Important Fire Safety Information:** When rigid vinyl siding is exposed to significant heat or flame, the vinyl will soften, sag, melt or burn, and may thereby expose material underneath. Care must be exercised when selecting underlayment materials because many underlayment materials are made from organic materials that are combustible. You should ascertain the fire properties of underlayment materials prior to installation. All materials should be installed in accordance with local, state and federal Building Code and fire regulations.

Wind Load Testing: CertainTeed Encore siding has been tested per ASTM D 5206 standard test method for wind load resistance to withstand negative wind load pressures and their mph equivalents as shown in the chart below. All products exceed industry standards for wind load performance. Check with your local building inspector for wind load requirements in your area for the type of structure you are building.

Table 2

	Fastener Spacing		2015/2018 IBC/IRC			2021 IBC/IRC		
Product			Standard Design Pressure	Maximum Windspeed (mph)		Standard Design Pressure	Maximum Windspeed (mph)	
			Rating	ASD	ULT	Rating	ASD	ULT
Double 4" Clapboard	Nails	16" o.c.	108.0	212	273	71.1	172	222
Double 4-1/2" Dutchlap	Nails	16" o.c.	64.8	164	212	46.7	139	180
Double 5" Clapboard	Nails	16" o.c.	80.2	183	236	51.1	146	188

<sup>\*</sup> Windload calculations based on ASTM D3679, ASCE 7-10, 30ft High, Exposure B

**Documents:** CertainTeed Vinyl Siding meets the requirements of one or more of the following specifications:

Texas Department of Insurance Product Evaluation EC-11

Conforms to ASTM Specification D3679

ICC-ES Evaluation Report ESR-1066

Florida BCIS Approval FL1573

For specific product evaluation/approval information, call 800-233-8990.

**Installation:** Prior to commencing work, verify governing dimensions of building, examine, clean and repair, if necessary, any adjoining work on which the siding is in any way dependent for its proper installation. Sheathing materials must have an acceptable working surface. Siding, soffit and accessories shall be installed in accordance with the latest editions of CertainTeed installation manuals on siding and soffit. Installation manuals are available from CertainTeed and its distributors.

**Warranty:** CertainTeed supports Encore siding products with a Lifetime Limited Warranty including PermaColor Lifetime Fade Protection to the original homeowner. The warranty is transferable if the home is sold.


**Technical Services:** CertainTeed maintains an Architectural Services staff to assist building professionals with questions regarding CertainTeed siding products. Call 800-233-8990 for samples and answers to technical or installation questions.

**Sample Short Form Specification:** Siding as shown on drawings or specified herein shall be Encore Vinyl Siding as manufactured by CertainTeed Siding, Malvern, PA. The siding shall have a .040" nominal thickness. Installation shall be in accordance with manufacturer's instructions.

**Three-part Format Specifications:** Long form specifications in three-part format are available from CertainTeed by calling our Architectural Services Staff at 800-233-8990. These specifications are also available on our website at <u>certainteed.com</u>.

# LANDMARK® SERIES

**Luxury and Designer Roofing Shingles** 

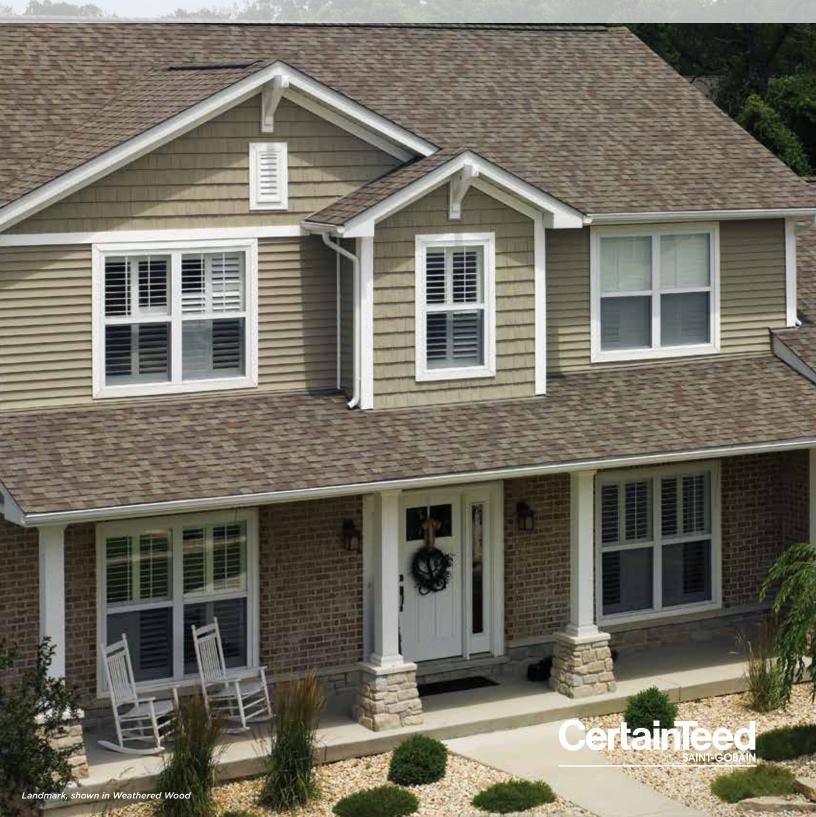



# Trust Your Home to Landmark

Few things in this world are as precious as the place that you call home. It is much more than just a house. It's the foundation from which you build your life. That's why having a roof that gives your home long-lasting curb appeal and protection from the elements is so important. At CertainTeed, our benchmark for success is our customers' total peace of mind. And we wouldn't have it any other way.

Our dedication to making the highestquality roofing systems continues to earn the respect of top building professionals. And our product portfolio offers the widest variety of design and color options in the industry. It's no wonder that more than a million homeowners across North America choose CertainTeed each year.

And the job doesn't stop once the roof goes on. Every CertainTeed product is backed by our industry-leading manufacturer's warranty, allowing you to rest confidently and comfortably for years to come.





## NAILTAK Shingle Technology

#### The bond that holds it together.

For more than a decade, NailTrak has improved shingle installation by providing a nailing area three times wider than that of a typical laminate shingle. This increases efficiency and accuracy in installation, providing homeowners greater peace of mind. Landmark shingles also feature our specially-formulated Quadra-Bond adhesive, providing industry-leading resistance to delamination. Together, our NailTrak and Quadra-Bond technologies deliver the strength and durability that allow your roof to stand the test of time.

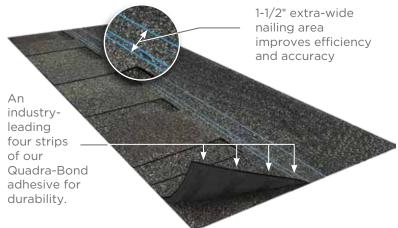


Diagram for illustrative purposes only.



### The ultimate in stain protection.

Those streaks you see on other roofs in your neighborhood? That's algae, and it's a common eyesore on roofing throughout North America. CertainTeed's StreakFighter technology uses the power of science to repel algae before it can take hold and spread. StreakFighter's granular blend includes naturally algae-resistant copper, helping your roof maintain its curb appeal and look beautiful for years to come.




Diagram for illustrative purposes only.



### LANDMARK® COLOR PALETTE



Silver Birch
CRRC Product ID 0668-0072



Granite Gray



Driftwood



Moire Black



Mountain Timber



Burnt Sienna



Georgetown Gray



Cinder Black



Heather Blend



Weathered Wood



Black Walnut



Resawn Shake




### **Technical Data Sheet**

# Landmark®, Landmark® Premium, Landmark® Pro Shingles, Landmark® Pro/Architect 80 (NW Region Only) Shingles

#### **PRODUCT INFORMATION**

Landmark shingles reflect the same high manufacturing standards and superior warranty protection as the rest of CertainTeed's line of roofing products. Landmark Premium (and Algae Resistant-AR), Landmark PRO (and AR) and Landmark (and AR) are built with the industry's toughest fiber glass mat base, and their strict dimensional tolerance assures consistency. Complex granule color blends and



subtle shadow lines produce a distinctive color selection. Landmark is produced with the unique NailTrak® nailing feature. *Please see the installation instruction section below for important information regarding NailTrak*.

In the Northwest Region Landmark PRO (AR) is double-branded as Landmark PRO/Architect 80 (AR).

Landmark algae-resistant (AR) shingles are algae-resistant and help protect against dark or black discoloration, sometimes called staining or streaking, caused by blue-green algae. AR shingles are not available in all regions.

Colors: Please refer to the product brochure or CertainTeed website for the colors available in your region.

Limitations: Use on roofs with slopes greater than 2" per foot. Low-slope applications (2:12 to < 4:12) require additional underlayment. In areas where icing along eaves can cause the back-up of water, apply CertainTeed WinterGuard® Waterproofing Shingle Underlayment, or its equivalent, according to application instructions provided with the product and on the shingle package.

**Product Composition:** Landmark Series shingles are composed of a fiber glass mat base. Ceramic-coated mineral granules are tightly embedded in carefully refined, water-resistant asphalt. Two pieces of the shingle are firmly laminated together in a special, tough asphaltic cement. All Landmark shingles have self-sealing adhesive strips.

### **Applicable Standards**

ASTM D3018 Type I ASTM D3462 ASTM E108 Class A Fire Resistance ASTM D3161 Class F Wind Resistance ASTM D7158 Class H Wind Resistance UL 790 Class A Fire Resistance ICC-ES ESR-1389 and ESR-3537 CSA Standard A123.5 (Regional) Miami-Dade Product Control Approved Florida Product Approval # FL5444 Meets TDI Windstorm Requirements

#### **Technical Data:**

	Landmark (and AR)	Landmark PRO* (and AR)	Landmark Premium (and AR)
Weight/Square (approx.)	219 to 238 lb **	240 to 267 lb **	300 lb
Dimensions (overall)	13 1/4" x 38 3/4"	13 1/4" x 38 3/4"	13 1/4" x 38 3/4"
Shingles/Square (approx.)	66	66	66
Weather Exposure	5 5/8"	5 5/8"	5 5/8"

<sup>\*</sup>Includes Landmark PRO AR/Architect 80

<sup>\*\*</sup>Dependent on manufacturing location

Landmark® Series Shingles

#### **INSTALLATION**

Detailed installation instructions are supplied on each bundle of Landmark shingles and must be followed. Separate application sheets may also be obtained from CertainTeed.

Hips and Ridges: For capping hip and ridge apply CertainTeed Shadow Ridge<sup>®</sup>, Cedar Crest<sup>®</sup> or Mountain Ridge<sup>®</sup> shingles of a like color.

#### **MAINTENANCE**

These shingles do not require maintenance when installed according to manufacturer's application instructions. However, to protect the investment, any roof should be routinely inspected at least once a year. Older roofs should be looked at more frequently.

#### **WARRANTY**

Landmark Premium (and AR), Landmark PRO/Architect 80 AR, Landmark PRO (and AR), and Landmark (and AR) shingles carry a lifetime limited, transferable warranty to the consumer against manufacturing defects when applied to stated CertainTeed application instructions for this product. In addition, Landmark Premium (and AR), Landmark PRO (and AR), Landmark PRO/Architect 80 AR, and Landmark (and AR) carry 10-years of SureStart™ Protection. Landmark AR shingles carry a 10-year algae resistance warranty. Landmark Premium AR, Landmark PRO AR, and Landmark PRO/Architect 80 AR shingles carry a 15-year algae resistance warranty. For specific warranty details and limitations, refer to the warranty itself (available from the local supplier, roofing contractor or on-line at <a href="www.certainteed.com">www.certainteed.com</a>).

#### FOR MORE INFORMATION

Sales Support Group: 800-233-8990 Web site: www.certainteed.com

See us at our on-line specification writing tool, CertaSpec®, at www.certainteed.com/certaspec.

