


## Remote Fixture Saf-T-Ray™ Series

Wall mount remote fixture for damp and wet locations



**Dimensions** (Dimensions are approximate and subject to change)

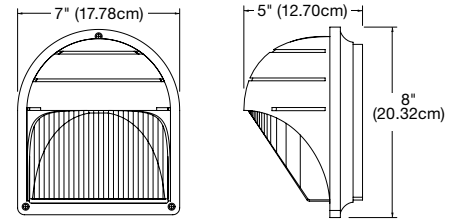

### Description

- Indoor or Outdoor use
- Die-Cast aluminum construction
- Fully gasketed cover
- Impact- and tamper-resistant polycarbonate lens

### Mounting

- Surface Wall Mount
- Universal J-Box mounting

### Lamp type

Choice of MR16 LED lamp voltages and wattages

### Approval

- UL 924 Listed
- NEMA-3
- Damp and wet location listed 50°F to 104°F (10°C to 40°C)

**Warranty** (subject to proper installation and maintenance)


Unit: three-year full warranty

Detailed warranty terms located on [page 197](#) or online at: [www.lightalarms.com](http://www.lightalarms.com)



### Photometric performance

Lamp	Spacing center-to-center (feet)	
	7 feet mounting height	
LD7 (clear lens)	28'	
LD7 (frosted lens)	16'	

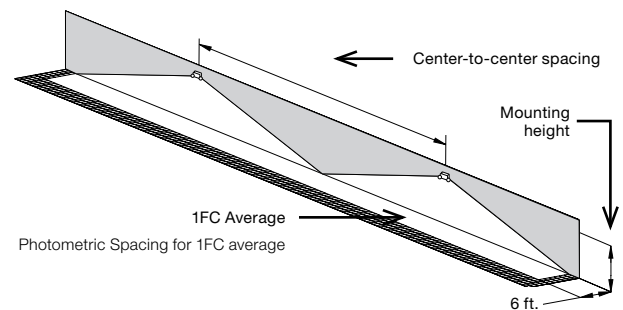

### Lamp selection chart – MR16 LED lamps

Lamp suffix	Voltage	Wattage	Lumens	Replacement #
LD1	6	4	130	580.0097-L
LD2	6	5	415	580.0122-L
LD7	12	4	170	580.0093-L
LD9	12	5	340	580.0098-L
LD10	12	6	540	580.0106-L
LD13	24	4	200	580.0104-L
LD25	120	4	200	580.0113-L

### Ordering format

Series	Lamp suffix	Color	Voltage	Options
SAF-2= Double lamp remote fixture	/ _____ <sup>1</sup>	-M= Mist white -B= Black -DG= Dark Gray	6= 6 VDC 12= 12 VDC 24= 24 VDC 120= 120 VAC/VDC	-VR= Vandal resistant screws -C= Clear lens
<b>Example: SAF-2/LD1-M6</b>				

<sup>1</sup>Choose from lamp selection chart