

ROOF SCALE: 1/8" = 1'-0"


**5** 05

### **ROOFING GENERAL NOTES**


A CONTRACTOR SHALL REVIEW AND COORDINATE WITH ARCHITECTURAL, MEP, AND STRUCTURAL PLANS TO ASCERTAIN EXACT CONDITIONS AND COMPONENTS RELATED TO THE WORK DESCRIBED BY THESE DOCUMENTS. ALL WORK SHALL BE IN ACCORDANCE WITH ACCEPTED MANUFACTURER'S PRINTED INSTRUCTIONS AND NRCA STANDARDS.


Α


- B DIMENSIONS, DETAILS, EQUIPMENT SIZE AND LOCATION SHOWN ON THESE ROOF PLAN AND ROOF DETAILS ARE FOR INFORMATION AND REFERENCE ONLY. EXACT SIZE, LOCATION, TYPE OF MATERIAL AND TYPE OF CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR TO CONFIRM AND COORDINATE. C REFER TO NOMENCLATURE FOR TYPE OF ROOF SYSTEM. AREAS ARE MARKED WITH DESIGNATED
- LETTER, SEE ROOF PLAN AND NOMENCLATURE.
- D MINIMUM SLOPE ALLOWABLE ON THE ROOF SHALL BE NO LESS THAN 1/4" PER FOOT. CRICKET THE UP-SLOPE SIDE OF ALL SQUARE CURBS AND PROJECTIONS OVER 20" IN WIDTH.
- E CONTRACTOR TO ENSURE RUNOFF PITCHES AWAY FROM ROOF EXPANSION JOINTS AND ROOF AREA SEAMS. ELEVATE ROOF EXPANSION JOINTS A MINIMUM OF 8" ABOVE THE ROOF MEMBRANE.
- F ALL CRICKET AND TAPERED INSULATION SHALL BE INSTALLED WITH A FINISH 1/4" PER FOOT MIN. SLOPE. CRICKET THE UP-SLOPE SIDE OF ALL SQUARE CURBS AND PROJECTIONS. G ALL PIPING, CONDUITS, ETC. SHALL BE A MIN. 10" ABOVE ROOF SURFACE. PROVIDE PORTABLE
- PIPE HANGERS WITH PROTECTION PADS. H PROVIDE 22 GAUGE STAINLESS STEEL, 2D FINISH, TREATED WOOD CURB AND BOX HOOD AT ALL GAS LINE AND WATER LINE ROOF PENETRATIONS. SEE A321 FOR TYPICAL ROOF DETAILS. I ISOLATE ALL HEAT PIPES/FLUES AS RECOMMENDED & OUTLINED IN THE NRCA MANUAL FOR
- ISOLATED STACK FLASHING. REFER TO MEP DRAWINGS FOR SIZE AND LOCATION OF DECK PENETRATIONS AND ROOFTOP EQUIPMENT. J PROVIDE WALKWAY PROTECTION PADS AROUND ALL ROOF HATCHES, MECHANICAL UNITS, AT
- ROOF TOP ACCESS DOORS, AND LADDERS (TOP & BOTTOM). K CONTRACTOR SHALL REFER TO A321 FOR TYPICAL ROOF DETAILS IN ADDITION TO DETAILS SPECIFICALLY NOTED ON PLANS.
- L CONTRACTOR TO ENSURE ALL ROOFTOP PENETRATIONS (EQUIPMENT, SOIL STACKS, ETC.) ARE INSTALLED MIN. 2'-0" FROM OTHER DECK PENETRATIONS, RISE WALLS, AND ROOF EDGE. M THROUGH WALL BASE FLASHING MIN. HEIGHT 10" AND MAX. HEIGHT 20" FROM FINISH DECK. DO
- NOT STEP THROUGH WALL FLASHING CLOSER THAN 5'-0" FROM CORNERS. N LOCATE PERIMETER DRAINS MAX. 6'-0" FROM EDGE TYPICAL UNLESS SHOWN OTHERWISE.
- O CONTRACTOR SHALL EXAMINE AND ENSURE DRAIN LINES, GUTTERS AND DOWNSPOUTS ARE FREE OF DEBRIS AND BLOCKAGE, FLUSH WITH WATER TO ENSURE THAT DRAINS FLOW FREELY, WHERE APPLICABLE.
- P OVERFLOW DRAINS SHALL BE SET 2" HIGHER THAN MAIN ROOF DRAIN ELEVATIONS UNLESS NOTED OTHERWISE. OVERFLOW DRAINS SHALL NOT HAVE STRAINERS UNLESS REQUIRED BY LOCAL CODES.
- Q AVOID THE USE OF PITCH PANS ON LOW-PITCH ROOFS EXCEPT WHERE NO OTHER SOLUTION CAN BE USED.
- R SECURE NAILERS AND CANT STRIPS TO ROOF DECK, NOT TO PARAPETS OR ADJACENT WALLS, TYPICAL.
- S CONTRACTOR SHALL PROVIDE ALL EQUIPMENT CURBS AND STANDS NECESSARY FOR ROOFTOP EQUIPMENT.

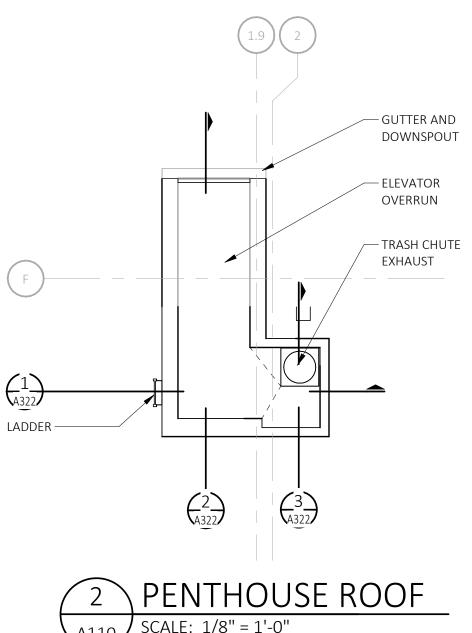

A110 SCALE: 1/8" = 1'-0" REFERENCE LOCATIONS: A110

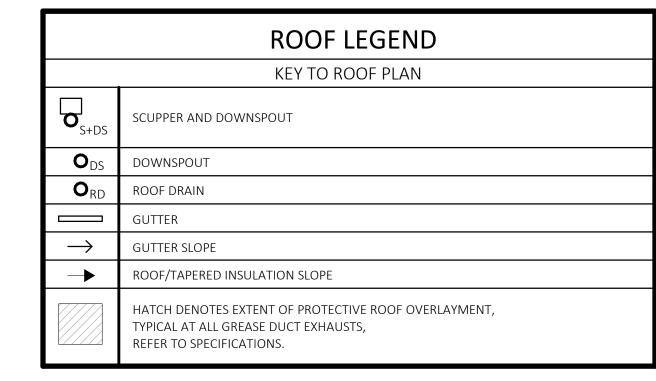



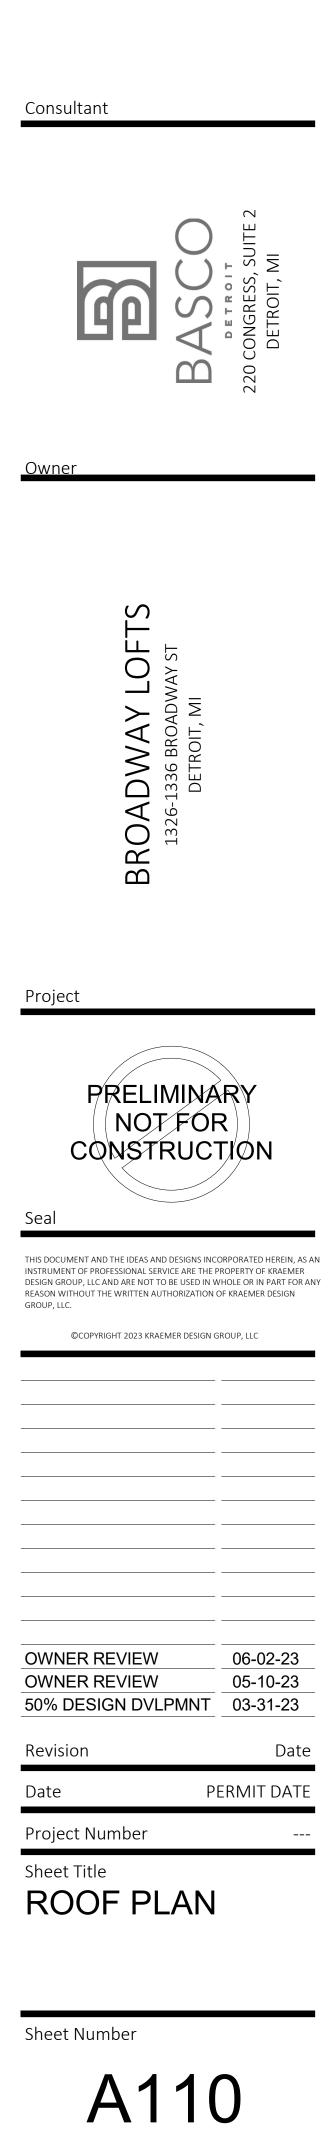

Architect

signG

THE FOLLOWING DIMENSION EQUALS

1

2

3

4

5

G

 $(\mathsf{F})$ 


E

С

B

A

D

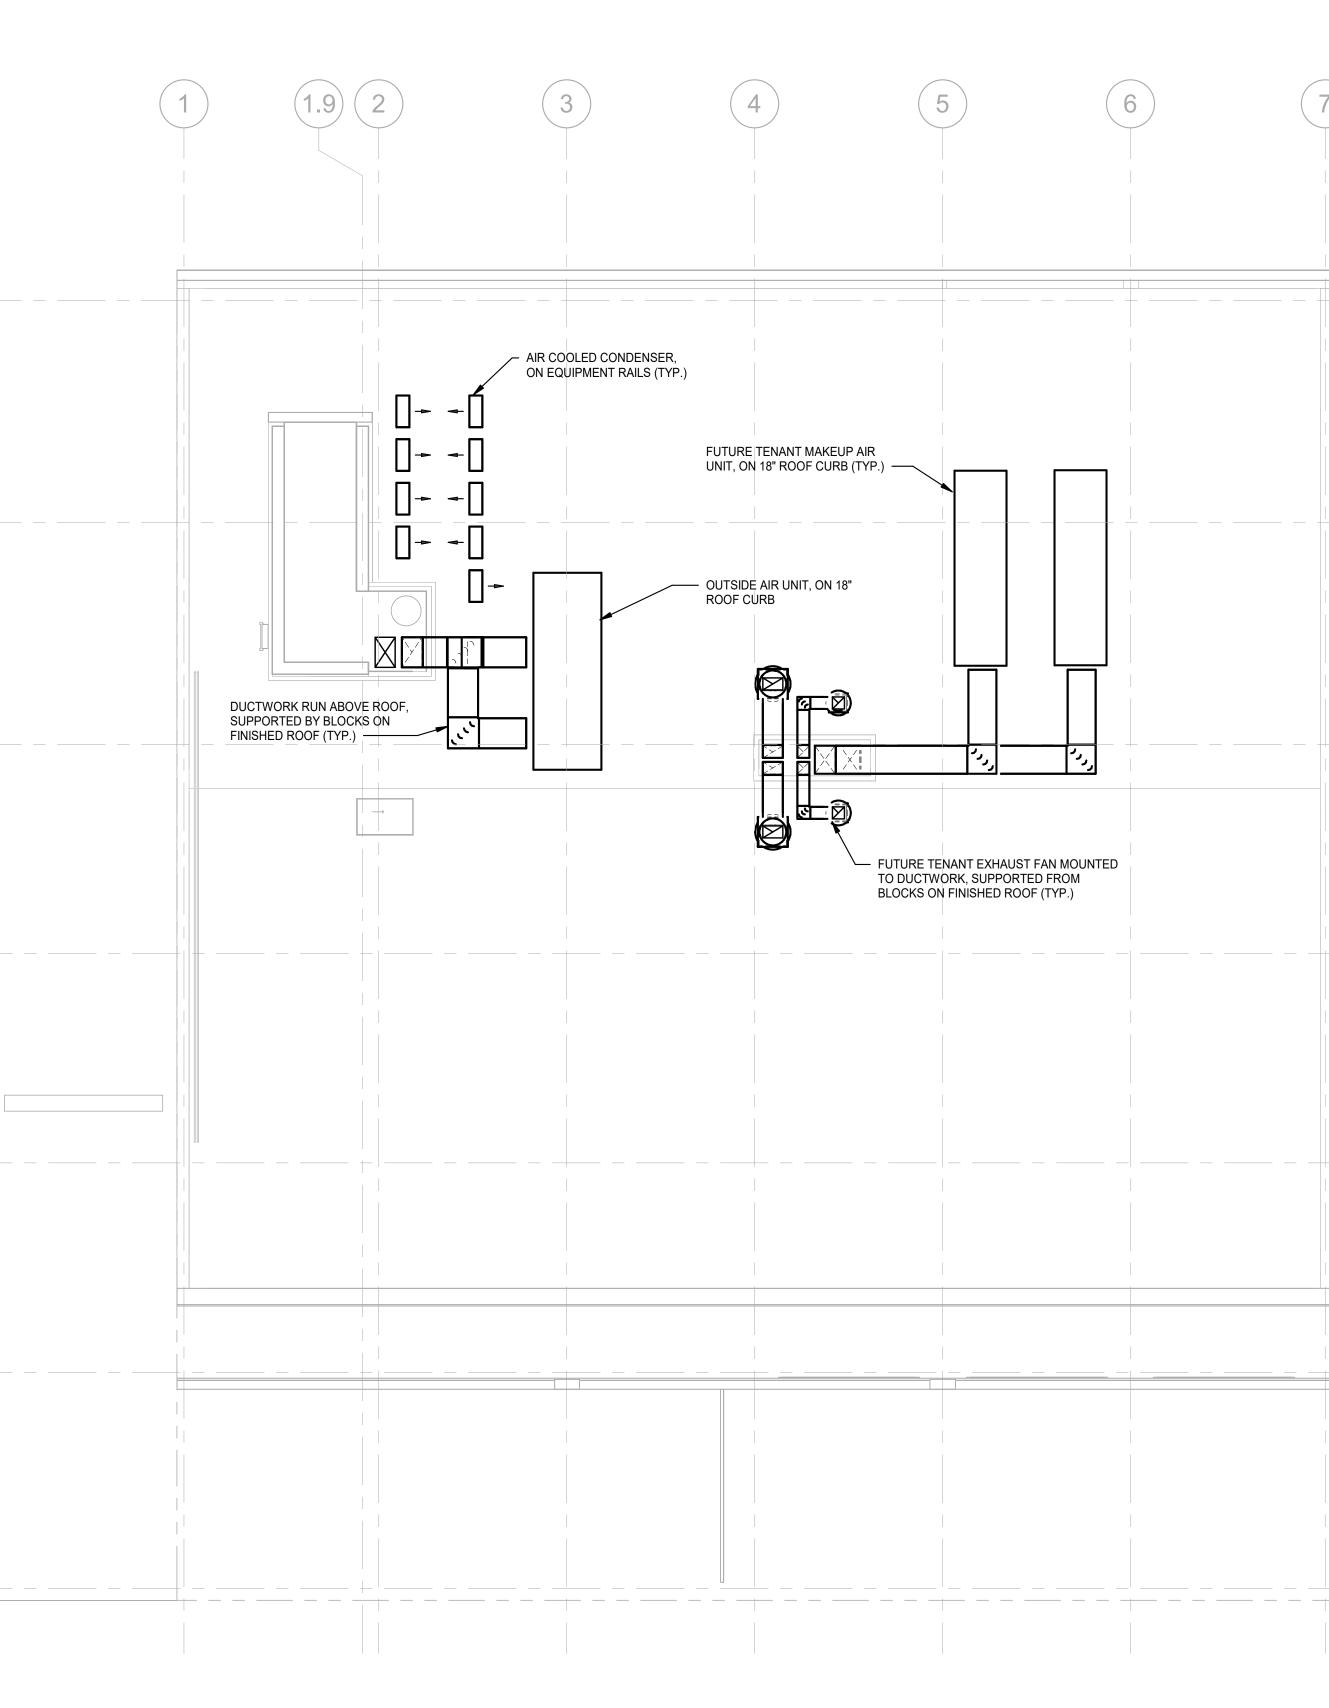

С




(7)

### SHEET METAL GENERAL NOTES:

А

- 1 THESE DRAWINGS ARE DIAGRAMMATIC, AND REPRESENT THE GENERAL INTENT AND ARRANGEMENT OF SYSTEMS. THEY ARE NOT TO BE CONSIDERED FABRICATION/COORDINATION/SHOP DRAWINGS. COORDINATION WITH OTHER TRADES IS REQUIRED. PROVIDE THE ADDITIONAL FITTINGS AND OFFSETS THAT WILL BE REQUIRED TO COMPLETE EACH SYSTEM AND TO AVOID INTERFERENCES WITH ALL OTHER SYSTEMS INCLUDING THE STRUCTURE, PIPING SYSTEMS, ELECTRICAL CONDUITS, BUS DUCTS, CABLE TRAY, LIGHT FIXTURES, ETC. AND/OR OTHER SPACE CONSTRAINTS.
- 2 INSTALL SYSTEMS SUCH THAT REQUIRED CLEARANCE AND SERVICE ACCESS SPACE IS PROVIDED AROUND ALL MECHANICAL AND ELECTRICAL EQUIPMENT, AND AROUND ANY COMPONENTS WHICH REQUIRE SERVICE ACCESS.
- 3 PIPING AND DUCTWORK SHALL NOT BE INSTALLED ABOVE ELECTRICAL TRANSFORMERS, SWITCHBOARDS, PANELBOARDS OR MOTOR CONTROL CENTERS.
- 4 COORDINATE AND PROVIDE ACCESS DOORS WITHIN INACCESSIBLE CEILING, SHAFT, AND CHASE AREAS FOR ALL COMPONENTS WHICH REQUIRE SERVICE ACCESS. REFER TO ARCHITECTURAL DRAWINGS FOR CEILING TYPES.
- 5 PROVIDE SUPPLEMENTARY STEEL AS REQUIRED FOR THE PROPER SUPPORT OF ALL SYSTEMS.
- 6 REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR DIMENSIONED LOCATION OF GRILLES, REGISTERS, AND DIFFUSERS.
- 7 REFER TO TEMPERATURE CONTROLS STANDARD MOUNTING HEIGHTS DETAIL FOR ELEVATIONS OF WALL MOUNTED TEMPERATURE CONTROL DEVICES.
- <u>#</u> <u>CONSTRUCTION KEY NOTES:</u>







1A201 SCALE: 1/8" = 1'-0" REFERENCE LOCATIONS: A101

3

# EXTERIOR ELEVATION MATERIAL LEGEND


MTL-1A	FLAT, FINISH: CHAMPAGNE
MTL-1B	FLAT, FINISH: CLASSIC BRONZE
MTL-2A	CORRUGATED, FINISH: CHAMPAG
MTL-2B	CORRUGATED, FINISH: MEDIUM
MTL-3A	CORRUGATED PERFORATED, FINI CHAMPAGNE
MTL-3B	CORRUGATED PERFORATED, FINI MEDIUM BRONZE
MTL-4A	TRIM, FINISH: CHAMPAGNE
MTL-4B	TRIM, FINISH: CLASSIC BRONZE


A201 SCALE: 1/8" = 1'-0" REFERENCE LOCATIONS: A101


- onze HAMPAGNE EDIUM BRONZE ED, FINISH: ED, FINISH:
- BRK-1 BRICK TECH, FINISH: OBSIDIAN VELOUR BRK-2 EXISTING BRICK BRK-3 BELDEN BRICK, FINISH: GRAPHITE BLACK VELOUR STN-1 HISTORIC STONE PANELS STN-2 LIMESTONE TRC-1 EXISTING TERRA COTTA


#### GENERAL NOTES

- A REFER TO A600 SERIES FOR WINDOW AND DOOR SCHEDULE AND DETAILS.
- B REFER TO REFLECTED CEILING PLANS FOR EXTERIOR SOFFIT INFORMATION. C REFER TO ROOF PLAN FOR PARAPET AND OVERHANG INFORMATION.
- D SEE ELECTRICAL DRAWINGS FOR ADDITIONAL LIGHTING REQUIREMENTS AND FIXTURE TYPES. E SEE ELEVATIONS AND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION AND CONTROL JOINTS. CONTRACTOR SHALL PROVIDE ADDITIONAL INTERIOR CONTROL JOINTS AS REQUIRED TO COMPLY WITH MAXIMUM SPACING REQUIREMENTS IN SPECIFICATIONS AND NATIONAL MASONRY INSTITUTE. PROVIDE CONTROL JOINTS AT ALL MASONRY REENTRANT CORNERS.
- F PROVIDE BACKING AND/OR STRUCTURAL SUPPORT AS REQUIRED FOR SIGNAGE AND LIGHTING. G EXPOSED STRUCTURAL STEEL SHALL BE GALVANIZED AND PAINTED UNLESS NOTED OTHERWISE.
- H APPLY SEALANT WHENEVER DISSIMILAR MATERIALS MEET.





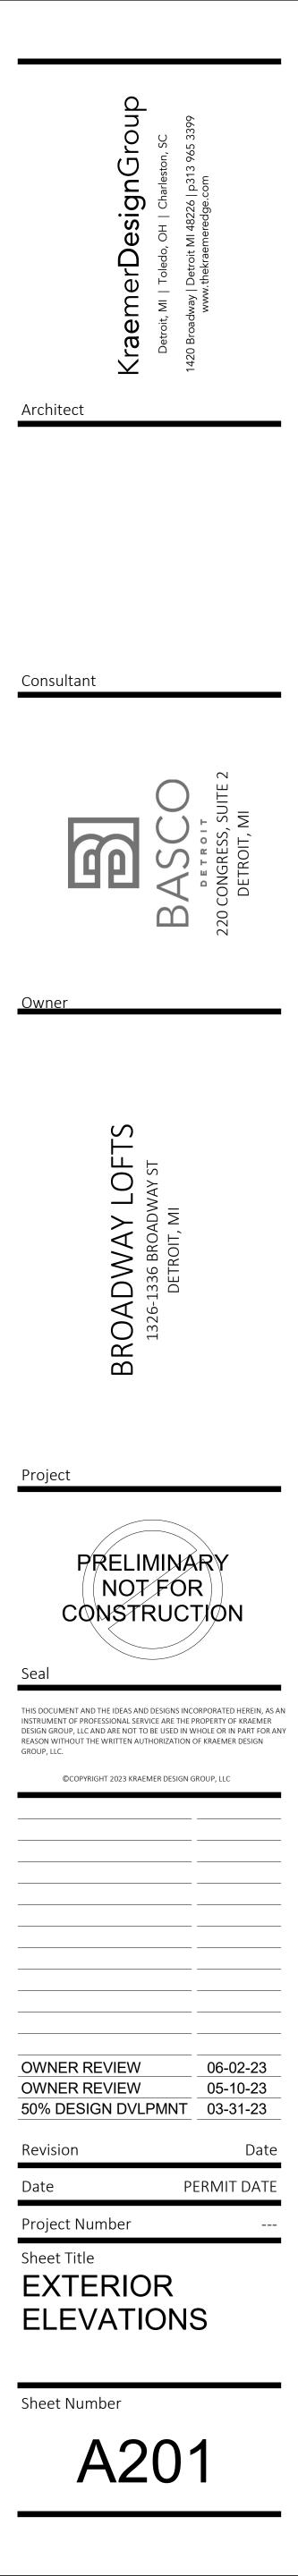

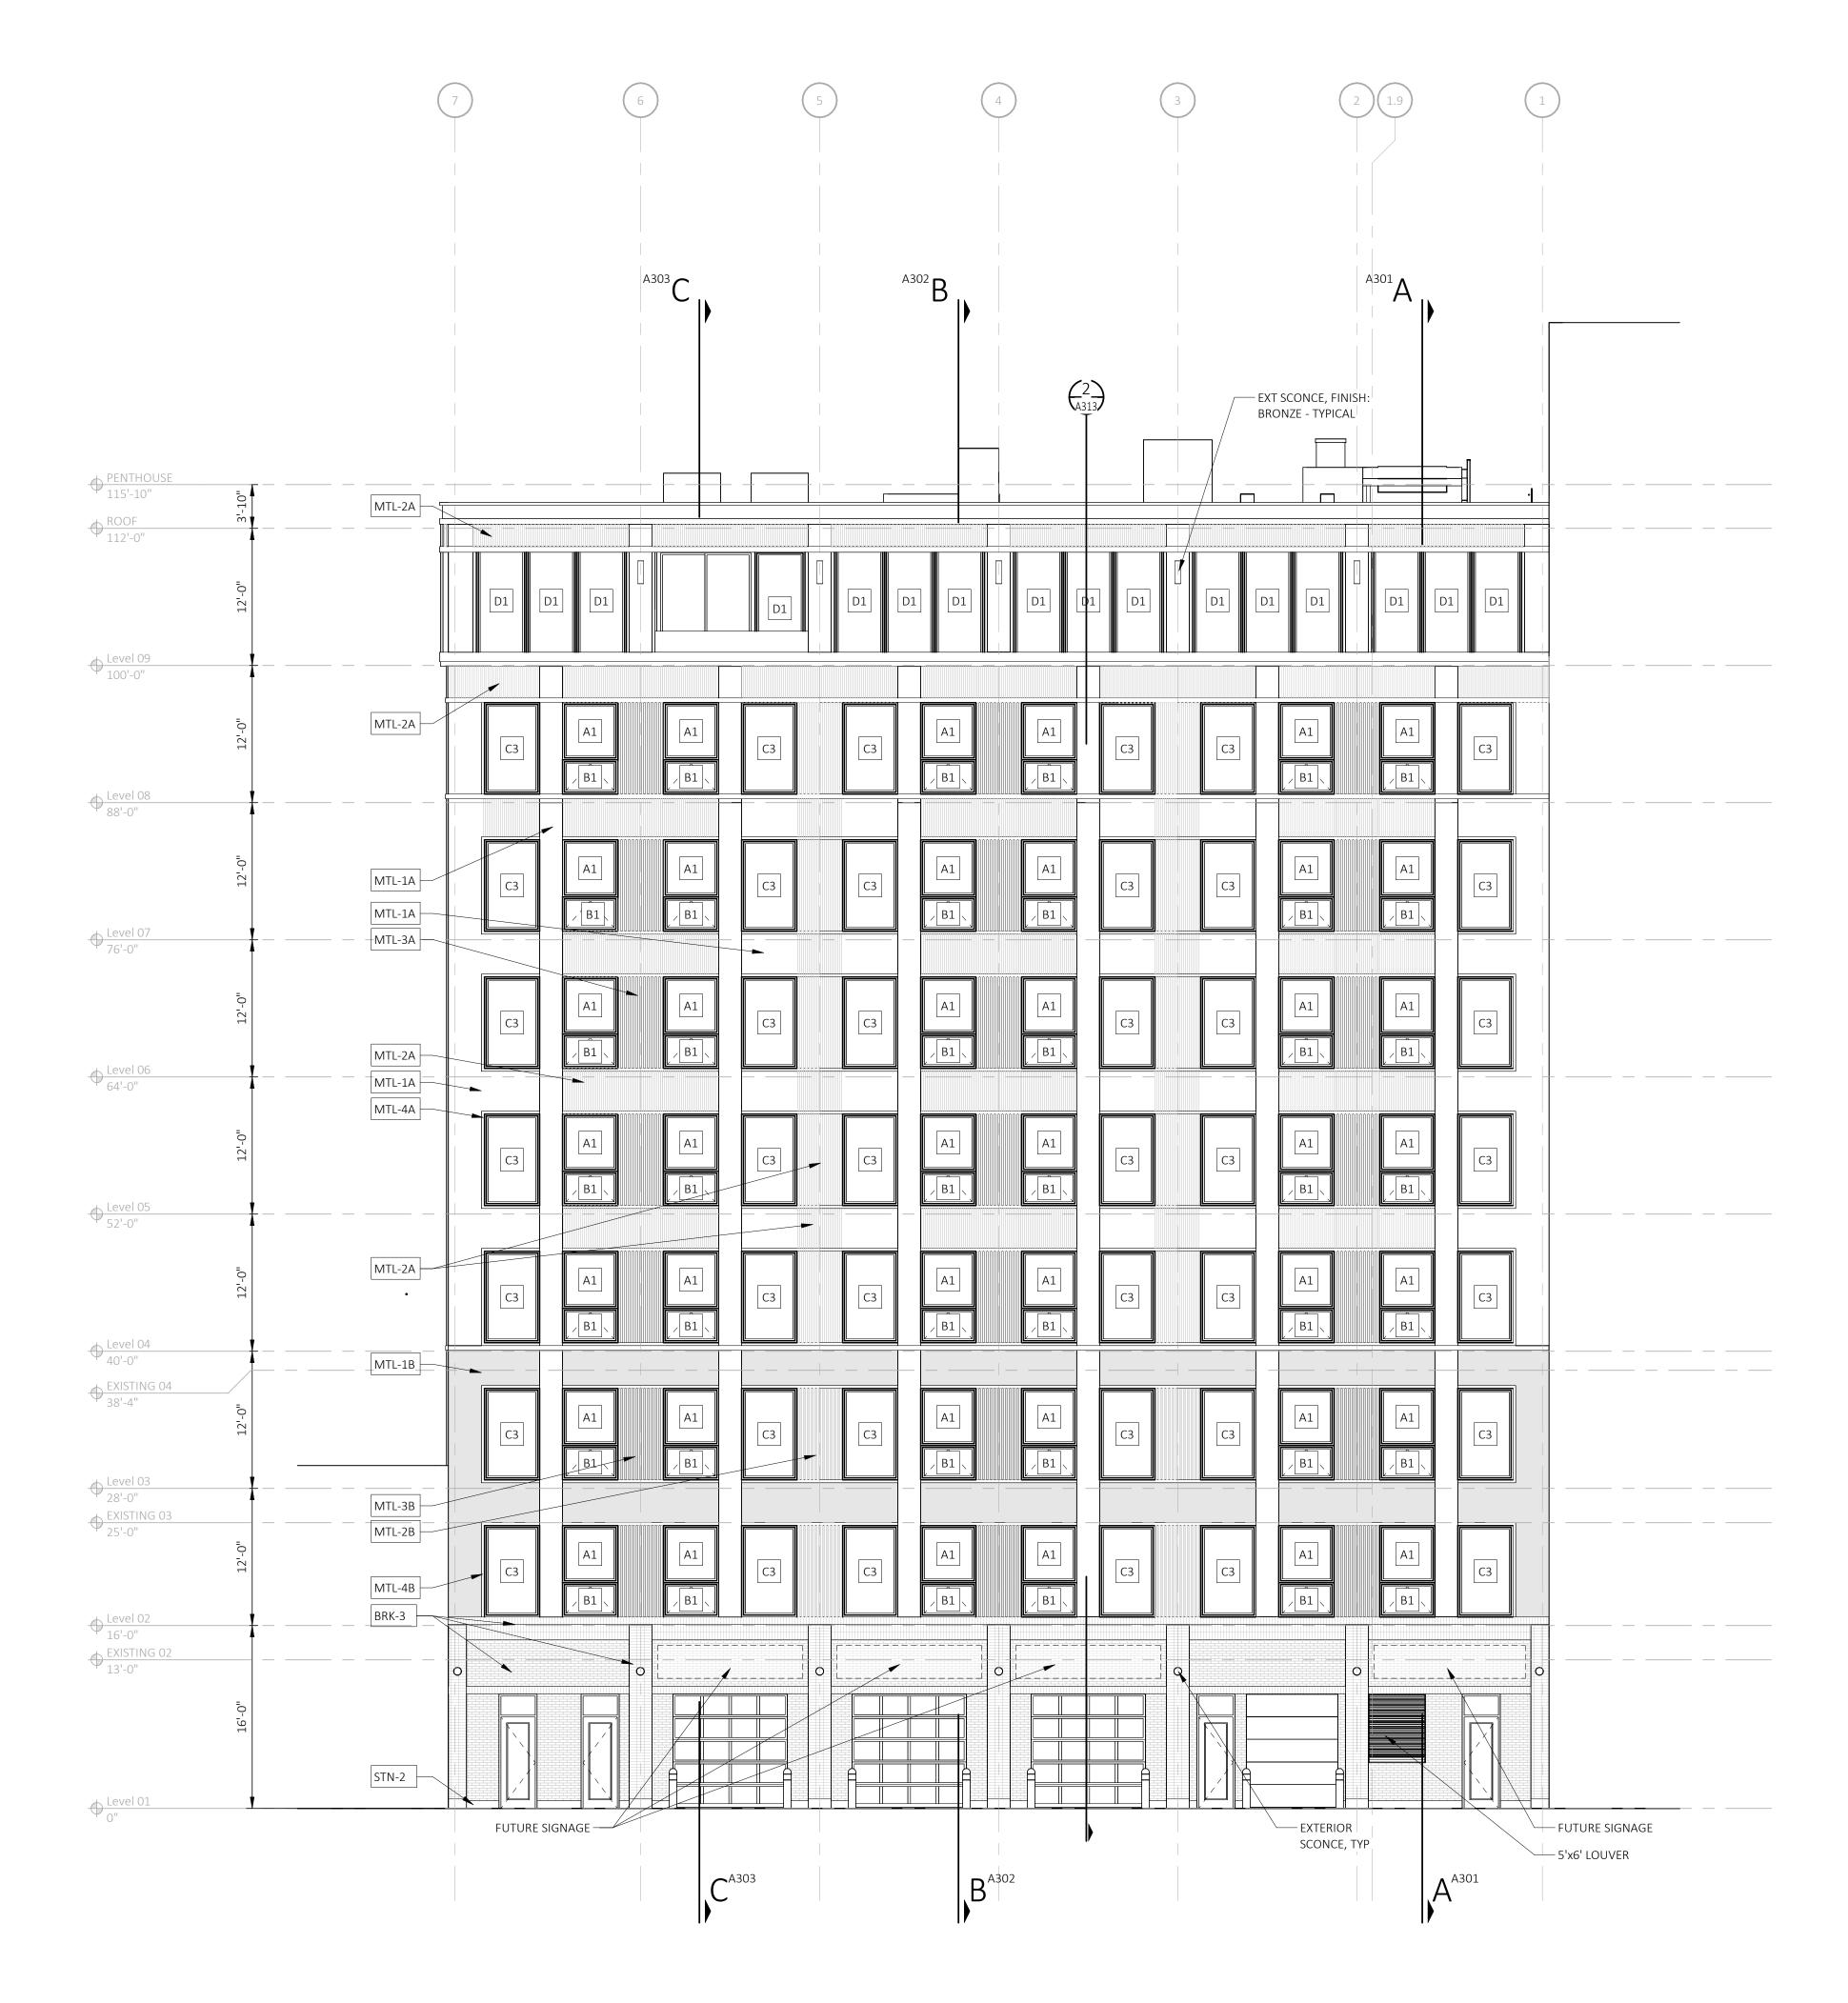

1 EL-NORTH ELEVATION A202 SCALE: 1/8" = 1'-0" REFERENCE LOCATIONS: A101

3

D

MTL-1A	FLAT, FINISH: CHAMPAGNE
MTL-1B	FLAT, FINISH: CLASSIC BRONZE
MTL-2A	CORRUGATED, FINISH: CHAMPA
MTL-2B	CORRUGATED, FINISH: MEDIUM
MTL-3A	CORRUGATED PERFORATED, FIN CHAMPAGNE
MTL-3B	CORRUGATED PERFORATED, FIN MEDIUM BRONZE
MTL-4A	TRIM, FINISH: CHAMPAGNE
MTL-4B	TRIM, FINISH: CLASSIC BRONZE

С

### **GENERAL NOTES**

A REFER TO A600 SERIES FOR WINDOW AND DOOR SCHEDULE AND DETAILS.

- B REFER TO REFLECTED CEILING PLANS FOR EXTERIOR SOFFIT INFORMATION. C REFER TO ROOF PLAN FOR PARAPET AND OVERHANG INFORMATION.
- D SEE ELECTRICAL DRAWINGS FOR ADDITIONAL LIGHTING REQUIREMENTS AND FIXTURE TYPES. E SEE ELEVATIONS AND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION AND CONTROL JOINTS. CONTRACTOR SHALL PROVIDE ADDITIONAL INTERIOR CONTROL JOINTS AS REQUIRED TO COMPLY WITH MAXIMUM SPACING REQUIREMENTS IN SPECIFICATIONS AND NATIONAL MASONRY INSTITUTE. PROVIDE CONTROL JOINTS AT ALL MASONRY REENTRANT CORNERS.

Α

- F PROVIDE BACKING AND/OR STRUCTURAL SUPPORT AS REQUIRED FOR SIGNAGE AND LIGHTING. G EXPOSED STRUCTURAL STEEL SHALL BE GALVANIZED AND PAINTED UNLESS NOTED OTHERWISE.
- H APPLY SEALANT WHENEVER DISSIMILAR MATERIALS MEET.

#### EXTERIOR ELEVATION MATERIAL LEGEND

- ONZE HAMPAGNE EDIUM BRONZE ED, FINISH:
- ED, FINISH:
- BRK-1 BRICK TECH, FINISH: OBSIDIAN VELOUR BRK-2 EXISTING BRICK BRK-3 BELDEN BRICK, FINISH: GRAPHITE BLACK VELOUR STN-1 HISTORIC STONE PANELS STN-2 LIMESTONE TRC-1 EXISTING TERRA COTTA

# GENERAL NOTES

- A REFER TO A600 SERIES FOR WINDOW AND DOOR SCHEDULE AND DETAILS. B REFER TO REFLECTED CEILING PLANS FOR EXTERIOR SOFFIT INFORMATION.
- C REFER TO ROOF PLAN FOR PARAPET AND OVERHANG INFORMATION.
- D SEE ELECTRICAL DRAWINGS FOR ADDITIONAL LIGHTING REQUIREMENTS AND FIXTURE TYPES. E SEE ELEVATIONS AND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION AND CONTROL JOINTS. CONTRACTOR SHALL PROVIDE ADDITIONAL INTERIOR CONTROL JOINTS AS REQUIRED TO COMPLY WITH MAXIMUM SPACING REQUIREMENTS IN SPECIFICATIONS AND NATIONAL MASONRY INSTITUTE. PROVIDE CONTROL JOINTS AT ALL MASONRY REENTRANT CORNERS.
- F PROVIDE BACKING AND/OR STRUCTURAL SUPPORT AS REQUIRED FOR SIGNAGE AND LIGHTING. G EXPOSED STRUCTURAL STEEL SHALL BE GALVANIZED AND PAINTED UNLESS NOTED OTHERWISE.
- H APPLY SEALANT WHENEVER DISSIMILAR MATERIALS MEET.


SCALE: 1/8" = 1'-0"




TRUE

NORTH



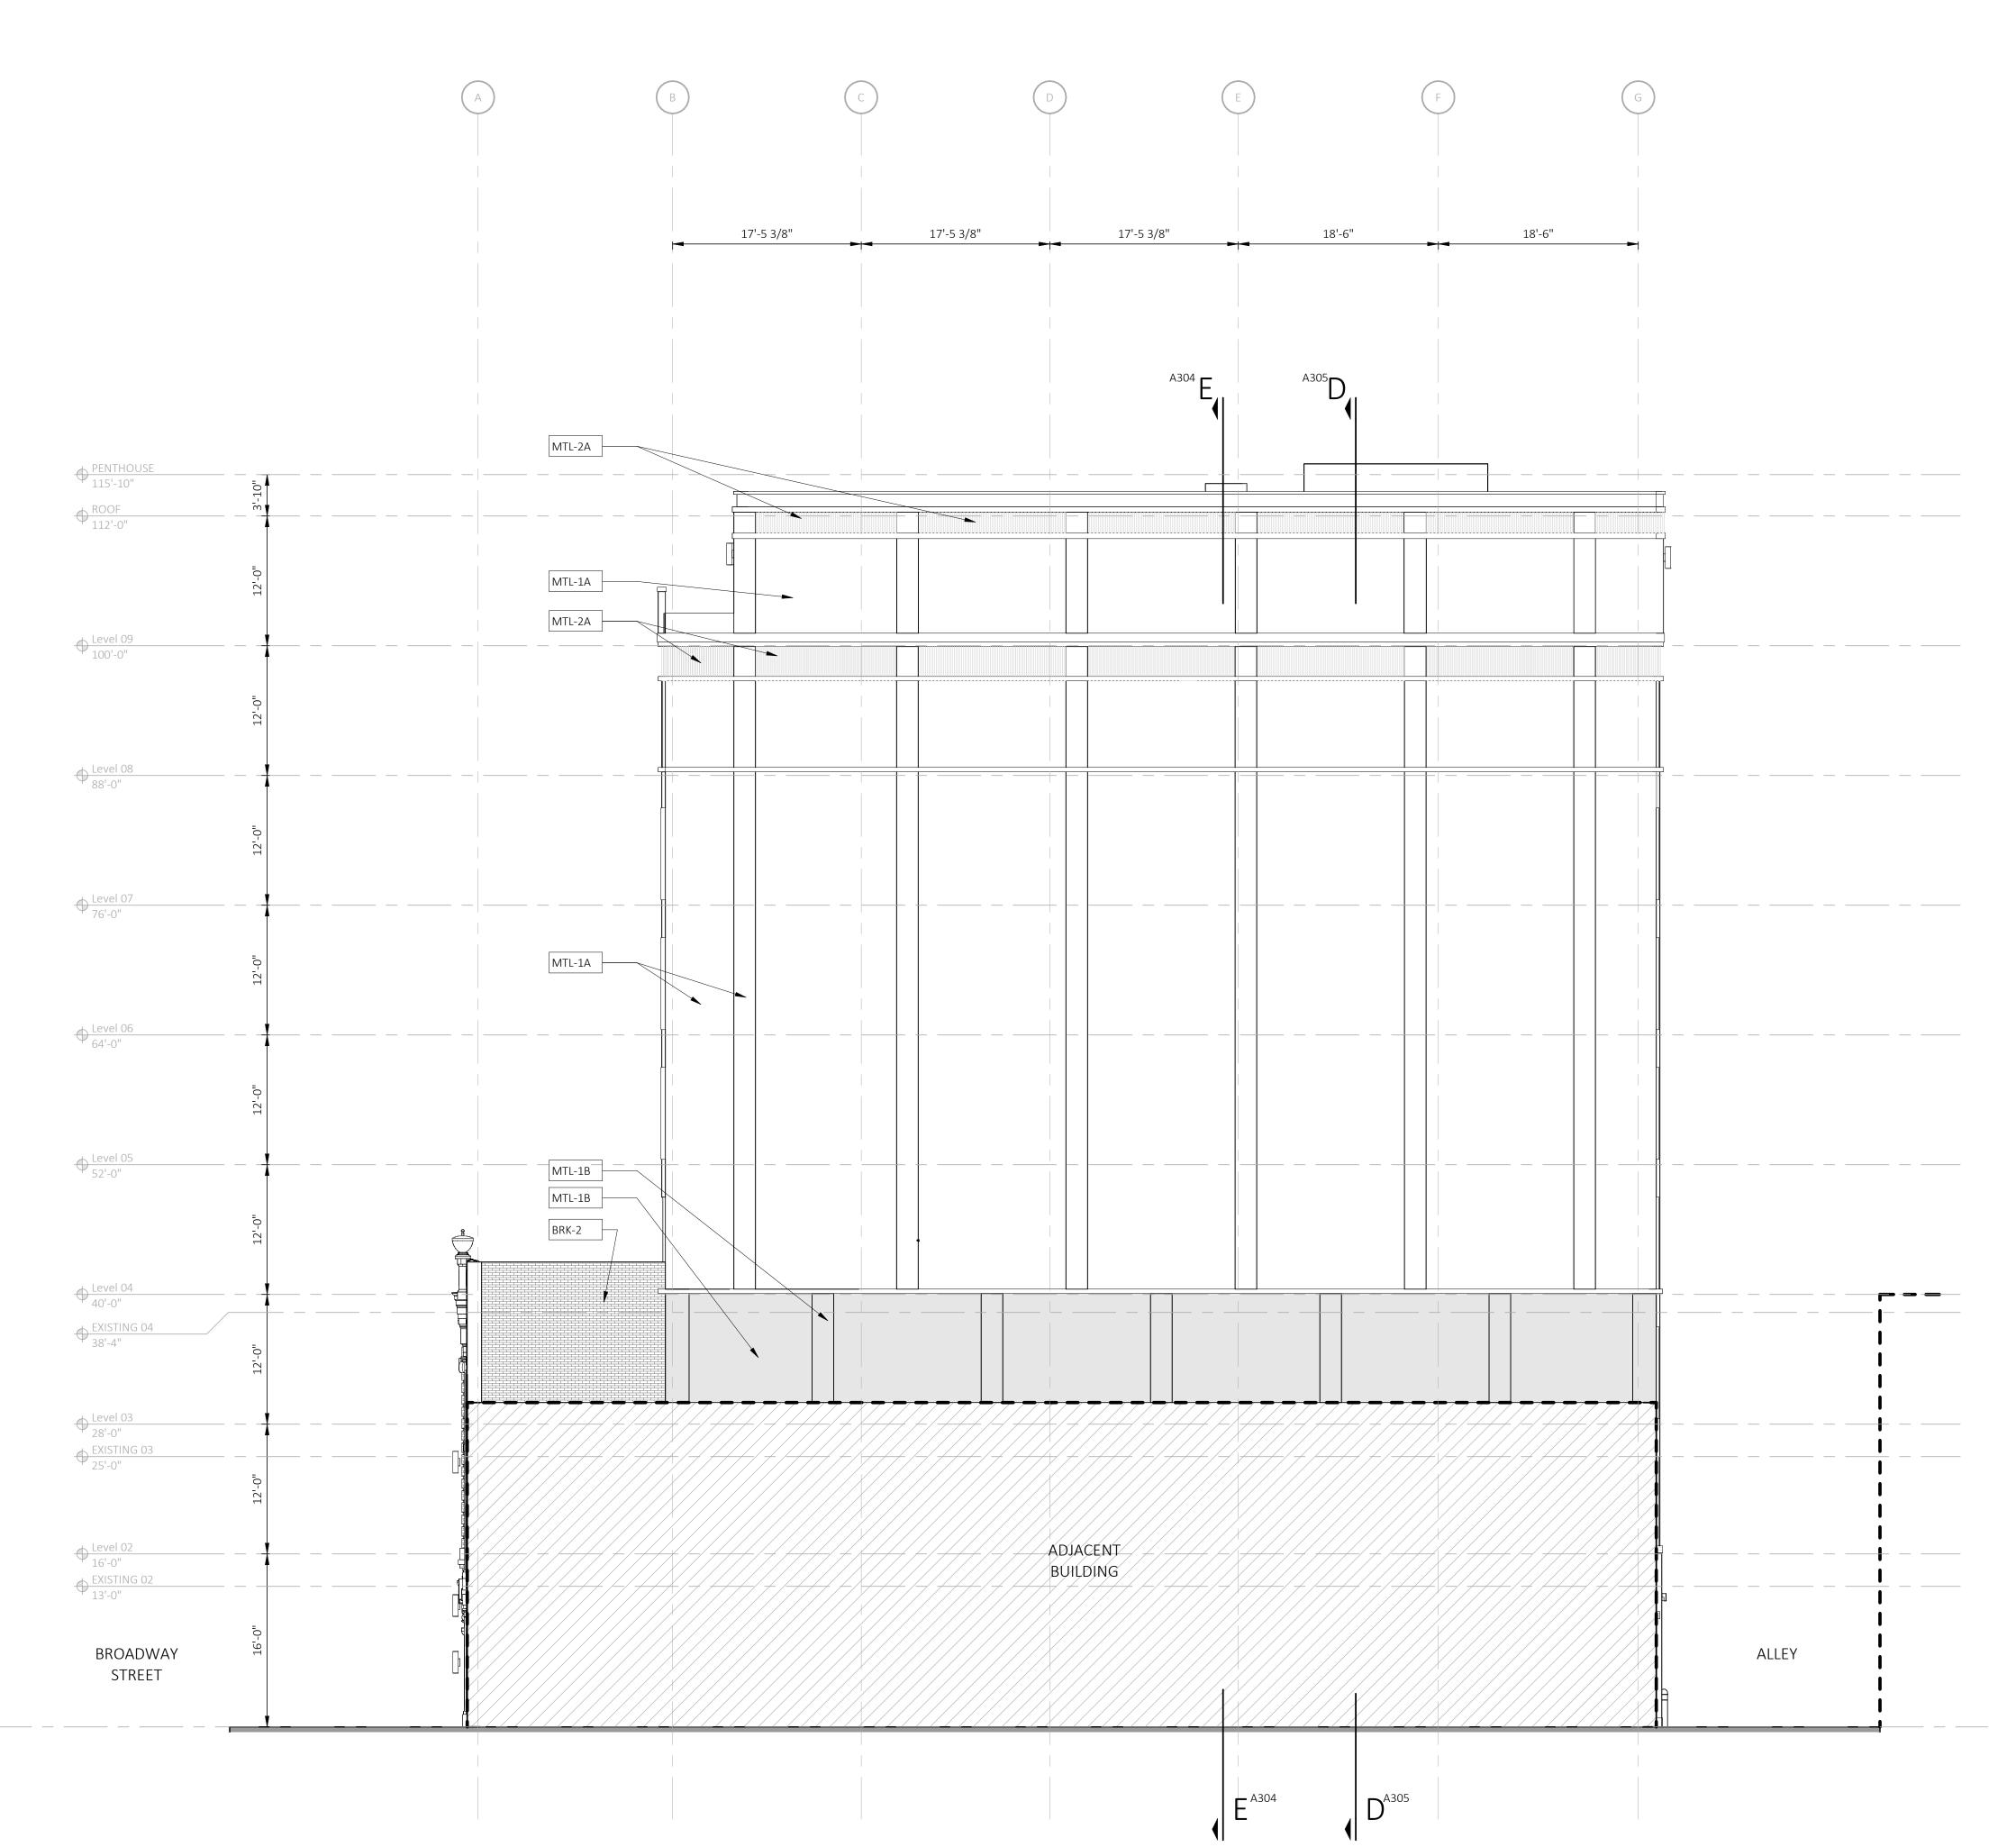



4

?

5

# EXTERIOR ELEVATION MATERIAL LEGEND

MTL-1A	FLAT, FINISH: CHAMPAGNE
MTL-1B	FLAT, FINISH: CLASSIC BRONZE
MTL-2A	CORRUGATED, FINISH: CHAMPA
MTL-2B	CORRUGATED, FINISH: MEDIUM
MTL-3A	CORRUGATED PERFORATED, FIN CHAMPAGNE
MTL-3B	CORRUGATED PERFORATED, FIN MEDIUM BRONZE
MTL-4A	TRIM, FINISH: CHAMPAGNE
MTL-4B	TRIM, FINISH: CLASSIC BRONZE

С

### **GENERAL NOTES**

A REFER TO A600 SERIES FOR WINDOW AND DOOR SCHEDULE AND DETAILS.


- B REFER TO REFLECTED CEILING PLANS FOR EXTERIOR SOFFIT INFORMATION. C REFER TO ROOF PLAN FOR PARAPET AND OVERHANG INFORMATION.
- D SEE ELECTRICAL DRAWINGS FOR ADDITIONAL LIGHTING REQUIREMENTS AND FIXTURE TYPES. E SEE ELEVATIONS AND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION AND CONTROL JOINTS. CONTRACTOR SHALL PROVIDE ADDITIONAL INTERIOR CONTROL JOINTS AS REQUIRED TO COMPLY WITH MAXIMUM SPACING REQUIREMENTS IN SPECIFICATIONS AND NATIONAL MASONRY INSTITUTE. PROVIDE CONTROL JOINTS AT ALL MASONRY REENTRANT CORNERS.
- F PROVIDE BACKING AND/OR STRUCTURAL SUPPORT AS REQUIRED FOR SIGNAGE AND LIGHTING. G EXPOSED STRUCTURAL STEEL SHALL BE GALVANIZED AND PAINTED UNLESS NOTED OTHERWISE.
- H APPLY SEALANT WHENEVER DISSIMILAR MATERIALS MEET.

- ONZE HAMPAGNE EDIUM BRONZE ED, FINISH:
- ED, FINISH:
- NE


BRK-1	BRICK TECH, FINISH: OBSIDIAN VELOUR
BRK-2	EXISTING BRICK
BRK-3	BELDEN BRICK, FINISH: GRAPHITE BLACK VELOUR
STN-1	HISTORIC STONE PANELS
STN-2	LIMESTONE
TRC-1	EXISTING TERRA COTTA

#### GENERAL NOTES

- A REFER TO A600 SERIES FOR WINDOW AND DOOR SCHEDULE AND DETAILS. B REFER TO REFLECTED CEILING PLANS FOR EXTERIOR SOFFIT INFORMATION.
- C REFER TO ROOF PLAN FOR PARAPET AND OVERHANG INFORMATION.
- D SEE ELECTRICAL DRAWINGS FOR ADDITIONAL LIGHTING REQUIREMENTS AND FIXTURE TYPES. SEE ELEVATIONS AND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION AND CONTROL JOINTS. CONTRACTOR SHALL PROVIDE ADDITIONAL INTERIOR CONTROL JOINTS AS REQUIRED TO COMPLY WITH MAXIMUM SPACING REQUIREMENTS IN SPECIFICATIONS AND NATIONAL MASONRY INSTITUTE. PROVIDE CONTROL JOINTS AT ALL MASONRY REENTRANT CORNERS.
- F PROVIDE BACKING AND/OR STRUCTURAL SUPPORT AS REQUIRED FOR SIGNAGE AND LIGHTING.
- G EXPOSED STRUCTURAL STEEL SHALL BE GALVANIZED AND PAINTED UNLESS NOTED OTHERWISE. H APPLY SEALANT WHENEVER DISSIMILAR MATERIALS MEET.







	G	F	A305D	( A304
	<b>F</b>			<u>1</u> !
⊕ PENTHOUSE		   		
+ 115'-10" + ROOF 112'-0"				
← Level 09 100'-0''				
⊕ Level 08 88'-0''				
← Level 07 76'-0"				
- ← Level 06 64'-0"				
← Level 05 52'-0"				
$ \begin{array}{c}                                     $				
<ul> <li>↓ Level 03</li> <li>28'-0"</li> <li>↓ EXISTING 03</li> <li>25'-0"</li> </ul>				
⊕ Level 02     16'-0"     ■     ■      ■      ■      ■      ■      ■      ■      ■      ■      ■     ■      ■				
Level 01				
			D <sup>A305</sup>	5

1

2

3

ADJACENT BUILDING		BROADWAY STREET
E <sup>A304</sup>		

С


# GENERAL NOTES

A REFER TO A600 SERIES FOR WINDOW AND DOOR SCHEDULE AND DETAILS.

- B REFER TO REFLECTED CEILING PLANS FOR EXTERIOR SOFFIT INFORMATION. C REFER TO ROOF PLAN FOR PARAPET AND OVERHANG INFORMATION.
- D SEE ELECTRICAL DRAWINGS FOR ADDITIONAL LIGHTING REQUIREMENTS AND FIXTURE TYPES. E SEE ELEVATIONS AND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION AND CONTROL JOINTS. CONTRACTOR SHALL PROVIDE ADDITIONAL INTERIOR CONTROL JOINTS AS REQUIRED TO COMPLY WITH MAXIMUM SPACING REQUIREMENTS IN SPECIFICATIONS AND NATIONAL MASONRY INSTITUTE. PROVIDE CONTROL JOINTS AT ALL MASONRY REENTRANT CORNERS.

Α

- F PROVIDE BACKING AND/OR STRUCTURAL SUPPORT AS REQUIRED FOR SIGNAGE AND LIGHTING. G EXPOSED STRUCTURAL STEEL SHALL BE GALVANIZED AND PAINTED UNLESS NOTED OTHERWISE.
- H APPLY SEALANT WHENEVER DISSIMILAR MATERIALS MEET.







- A REFER TO A600 SERIES FOR WINDOW AND DOOR SCHEDULE AND DETAILS.
- B REFER TO REFLECTED CEILING PLANS FOR EXTERIOR SOFFIT INFORMATION. C REFER TO ROOF PLAN FOR PARAPET AND OVERHANG INFORMATION.
- D SEE ELECTRICAL DRAWINGS FOR ADDITIONAL LIGHTING REQUIREMENTS AND FIXTURE TYPES. E SEE ELEVATIONS AND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION AND CONTROL JOINTS. CONTRACTOR SHALL PROVIDE ADDITIONAL INTERIOR CONTROL JOINTS AS REQUIRED TO
- COMPLY WITH MAXIMUM SPACING REQUIREMENTS IN SPECIFICATIONS AND NATIONAL MASONRY INSTITUTE. PROVIDE CONTROL JOINTS AT ALL MASONRY REENTRANT CORNERS. F PROVIDE BACKING AND/OR STRUCTURAL SUPPORT AS REQUIRED FOR SIGNAGE AND LIGHTING. G EXPOSED STRUCTURAL STEEL SHALL BE GALVANIZED AND PAINTED UNLESS NOTED OTHERWISE.
- H APPLY SEALANT WHENEVER DISSIMILAR MATERIALS MEET.

#### **EXTERIOR RESTORATION NOTES**

- A. MASONRY/STONE RESTORATION CONTRACTOR ("SUBCONTRACTOR") TO PROVIDE ALL LABOR, MATERIAL, EQUIPMENT, SUPERVISION, PERMITS AND ANY OTHER COSTS OR EXPENSES NECESSARY TO COMPLETE THE WORK. SUBCONTRACTOR JOB MOBILIZATION SHALL INCLUDE, BUT NOT BE LIMITED TO, ANY NECESSARY WORKSTATION AND JOB TRAILER, MAST CLIMBING PLATFORMS,
- AERIAL LIFTS, SWING STAGES, BARRICADES AND WALK THRU SCAFFOLD AS NEEDED. BUILDING RESTORATION TO INCLUDE ALL TERMS, CONDITIONS AND SPECIFICATIONS OF ORIGINAL CONTRACT AND ANY ADDITIONAL WORK NECESSARY TO MEET THE SECRETARY OF THE INTERIOR STANDARDS FOR THE REHABILITATION OF HISTORIC PROPERTIES. THIS INCLUDES ALL WORK NECESSARY OVER AND ABOVE THAT SPECIFIED IN THE ARCHITECTURAL DRAWINGS AND OTHER CONSTRUCTION DOCUMENTS, INCLUDING ALL NOTES REGARDLESS OF TIME AND MATERIAL NECESSARY TO EXECUTE THIS WORK. ANY AREAS INDICATED WITHIN DRAWINGS ARE ONLY SUGGESTIVE IN NATURE. MASON TO MEET WITH ARCHITECT AND OWNER TO CONFIRM THE SCOPE OF WORK.
- C. RESTORATION CONTRACTOR SHALL INSPECT ALL EXISTING MASONRY, INCLUDING BOTH SIDES OF PARAPET FULL HEIGHT, FOR STRUCTURAL STABILITY PRIOR TO BID. REINSPECT AFTER INITIAL CLEANING OF MASONRY.
- D. ALL ELEVATIONS SHALL UNDERGO COMPLETE BRICK, STONE, AND TERRA COTTA CLEANING FROM PARAPET TO GRADE. SEE MASONRY CLEANING SPECIFICATION SECTIONS FOR DETAILS ON APPROVED CLEANING PROCEDURES, PRODUCTS, AND MANUFACTURERS.
- E. CLEAN FACADE USING GENTLEST MEANS POSSIBLE TO ACHIEVE SATISFACTORY RESULTS WITHOUT CHANGING THE SURFACE OF THE MASONRY. PAY SPECIAL ATTENTION TO AREAS OF EXCESSIVE SOILING. CONTRACTOR SHALL CONDUCT TEST PATCHES TO ENSURE THE BEST AND MOST ECONOMICAL MEANS OF CLEANING. ALL MASONRY AND TERRA COTTA CLEANING SHALL MEET THE SECRETARY OF INTERIOR STANDARDS FOR REHABILITATION AS WELL AS ALL APPLICABLE NATIONAL PARK SERVICE TECHNICAL BRIEFS.
- F. SURFACES TO BE PRE-WET WITH CLEAN WATER. CLEANING SOLUTIONS TO NOT REMAIN ON SURFACES FOR MORE THAN 5 MINUTES FOLLOWED IMMEDIATELY BY LOW-PRESSURE FLOOD RINSE, UNLESS NOTED OTHERWISE IN MASONRY CLEANING SPECIFICATION. CLEANING IS TO BRING MASONRY / STONE UNIT AS CLOSE AS POSSIBLE TO ORIGINAL COLOR WITHOUT BURNING OR ABRASION.
- G CLEAN ALL STONE THAT IS TO REMAIN & LET WEATHER FOR TWO WEEKS BEFORE ANY REPLACEMENT OR PATCHING IS TO OCCUR - REPLACEMENT STONE & PATCHED AREAS TO MATCH EXIST 'CLEANED' COLOR
- H. 100% OF MORTAR JOINTS TO BE VISUALLY INSPECTED. ALL MORTAR JOINTS DETERIORATED IN EXCESS OF 3/8 INCH BEYOND FACE OF MASONRY/STONE UNIT, OR EVIDENCING UNSOUNDNESS OF CRACKING WHETHER STRUCTURAL OR OTHERWISE SHALL BE REMOVED TO A DEPTH OF 1/2" MINIMUM. WRITTEN APPROVAL BY OWNER SHALL BE REQUIRED PRIOR TO COMMENCEMENT OF REPAIR BY SATISFACTORY SUBMISSION OF MOCK-UP OF PROPOSED MORTAR JOINT. NEW MORTAR APPLIED TO ALL OPEN JOINTS SHALL BE OF NO GREATER STRENGTH THAN ORIGINAL
- MORTAR OR MASONRY UNITS. MORTAR COLOR, TEXTURE, CONSISTENCY AND JOINT PROFILE WILL MATCH EXISTING AS CLOSE AS POSSIBLE. J APPLY NEW, TWO COMPONENT URETHANE SEALANT AT ALL JOINTS WHERE DISSIMILAR MATERIALS MEET, AND ALL SKYWARD FACING JOINTS. BACKER ROD TO BE INSTALLED IN OPEN
- JOINT PRIOR TO SEALANT APPLICATION. K. NO ACCELERATORS OR OTHER ADMIXTURES SHALL BE USED WITHOUT PRIOR WRITTEN OWNER APPROVAL. ENCLOSURES AND HEAT SUFFICIENT TO PROTECT MORTAR FROM FREEZING PRIOR TO
- SET SHALL BE THE SOLE RESPONSIBILITY OF SUBCONTRACTOR. L. REPLACE/RESET LOOSE MASONRY UNITS AND REPOINT DAMAGED MORTAR JOINTS AS REQUIRED. IF NECESSARY. RECOMMEND FURTHER REHABILITATION TO ENSURE STABILITY OF EXTERIOR WALL
- AND PARAPET CONSTRUCTION. SEE MASONRY RESTORATION SPECIFICATIONS FOR DETAILS ON APPROVED RESTORATION PROCEDURES, PRODUCTS, AND MANUFACTURERS. ALL MASONRY RESTORATION WORK SHALL MEET THE SECRETARY OF INTERIOR STANDARDS FOR REHABILITATION AS WELL AS ALL APPLICABLE NATIONAL PARK SERVICE TECHNICAL BRIEFS.
- M. ALL MASONRY/ STONE UNIT SHALL BE REPLACED WITH OWNER APPROVED MATERIAL WHEREIN SPALLING OR OTHER DETERIORATION ELIMINATED MORE THAN 5% OF THE MASONRY/ STONE UNIT (MEASURED BY ORIGINAL BRICK OR STONE FACE AREA).
- N. INSPECT ALL TERRA COTTA UNITS FOR DAMAGE, SPALLING OR CRAZING.
- O. WHERE TERRA COTTA GLAZING HAS SPALLED AND THE CLAY SUBSTRATE IS IN GOOD CONDITION, COAT RAW CLAY WITH APPROVED BREATHABLE SEALER TO MATCH COLOR OF EXISTING GLAZING. P. WHERE TERRA COTTA UNITS HAVE SPALLED SIGNIFICANTLY, PATCH DAMAGED AREAS WITH APPROVED MASONRY REPAIR MORTAR AS REQUIRED BY DEPTH OF DAMAGED AREA. COAT PATCHED AREA WITH APPROVED BREATHABLE SEALER TO MATCH COLOR OF EXISTING GLAZING.
- Q. WHERE TERRA COTTA HAS DETERIORATED BEYOND REPAIR, REMOVE AFFECTED TERRA COTTA UNITS AND PROVIDE NEW TERRA COTTA UNITS TO MATCH EXISTING PROFILE, COLOR AND FINISH. R. SEE TERRA COTTA RESTORATION SPECIFICATIONS FOR APPROVED RESTORATION PROCEDURES,
- PRODUCTS, AND MANUFACTURERS. ALL TERRA COTTA RESTORATION WORK SHALL MEET THE SECRETARY OF INTERIOR STANDARDS FOR REHABILITATION AS WELL AS ALL APPLICABLE NATIONAL PARK SERVICE TECHNICAL BRIEFS.


#### EXTERIOR ELEVATION MATERIAL LEGEND

TL-1A	FLAT, FINISH: CHAMPAGNE
TL-1B	FLAT, FINISH: CLASSIC BRONZE
TL-2A	CORRUGATED, FINISH: CHAMPAGNE
TL-2B	CORRUGATED, FINISH: MEDIUM BRONZE
TL-3A	CORRUGATED PERFORATED, FINISH: CHAMPAGNE
TL-3B	CORRUGATED PERFORATED, FINISH: MEDIUM BRONZE
TL-4A	TRIM, FINISH: CHAMPAGNE

BRK-2 EXISTING BRICK STN-1 HISTORIC STONE PANELS STN-2 LIMESTONE



- BRK-3 BELDEN BRICK, FINISH: GRAPHITE BLACK VELOUR
- TRC-1 EXISTING TERRA COTTA










12'-0" 12'-0" 3'-10" 3'-10"	*SIGHTLING TO ROOFTOP EQUIPMENT, NOT VISIBLE FROM STREET LEVEL		
12'-0"			
12'-0"			
12'-0"			
12'-0"			
12'-0"			
12'-0"			
12'-0"			ļ
12'-0''			1
12'-0"			
12'-0"			, I
			, I
			, I
			, I
12'-0"			, I
			ч 
			<b> </b> -
			" I
12'-0"			+
			, 
	<b>`</b>		
12'-0"			
12'-0"			
-0			<u> </u>
16'-	BROADWAY		1
	STREET		1
			 -
<b>▲</b>			
		ONED	FIRE PUMP
12			1
			 -
	12'-0" 16'-0" 12		10-21 10-21 10-21 10-21 10-21 10-21 BROADWAY STREET BROADWAY

**2 4** ∁ 💻 5

3

D


A

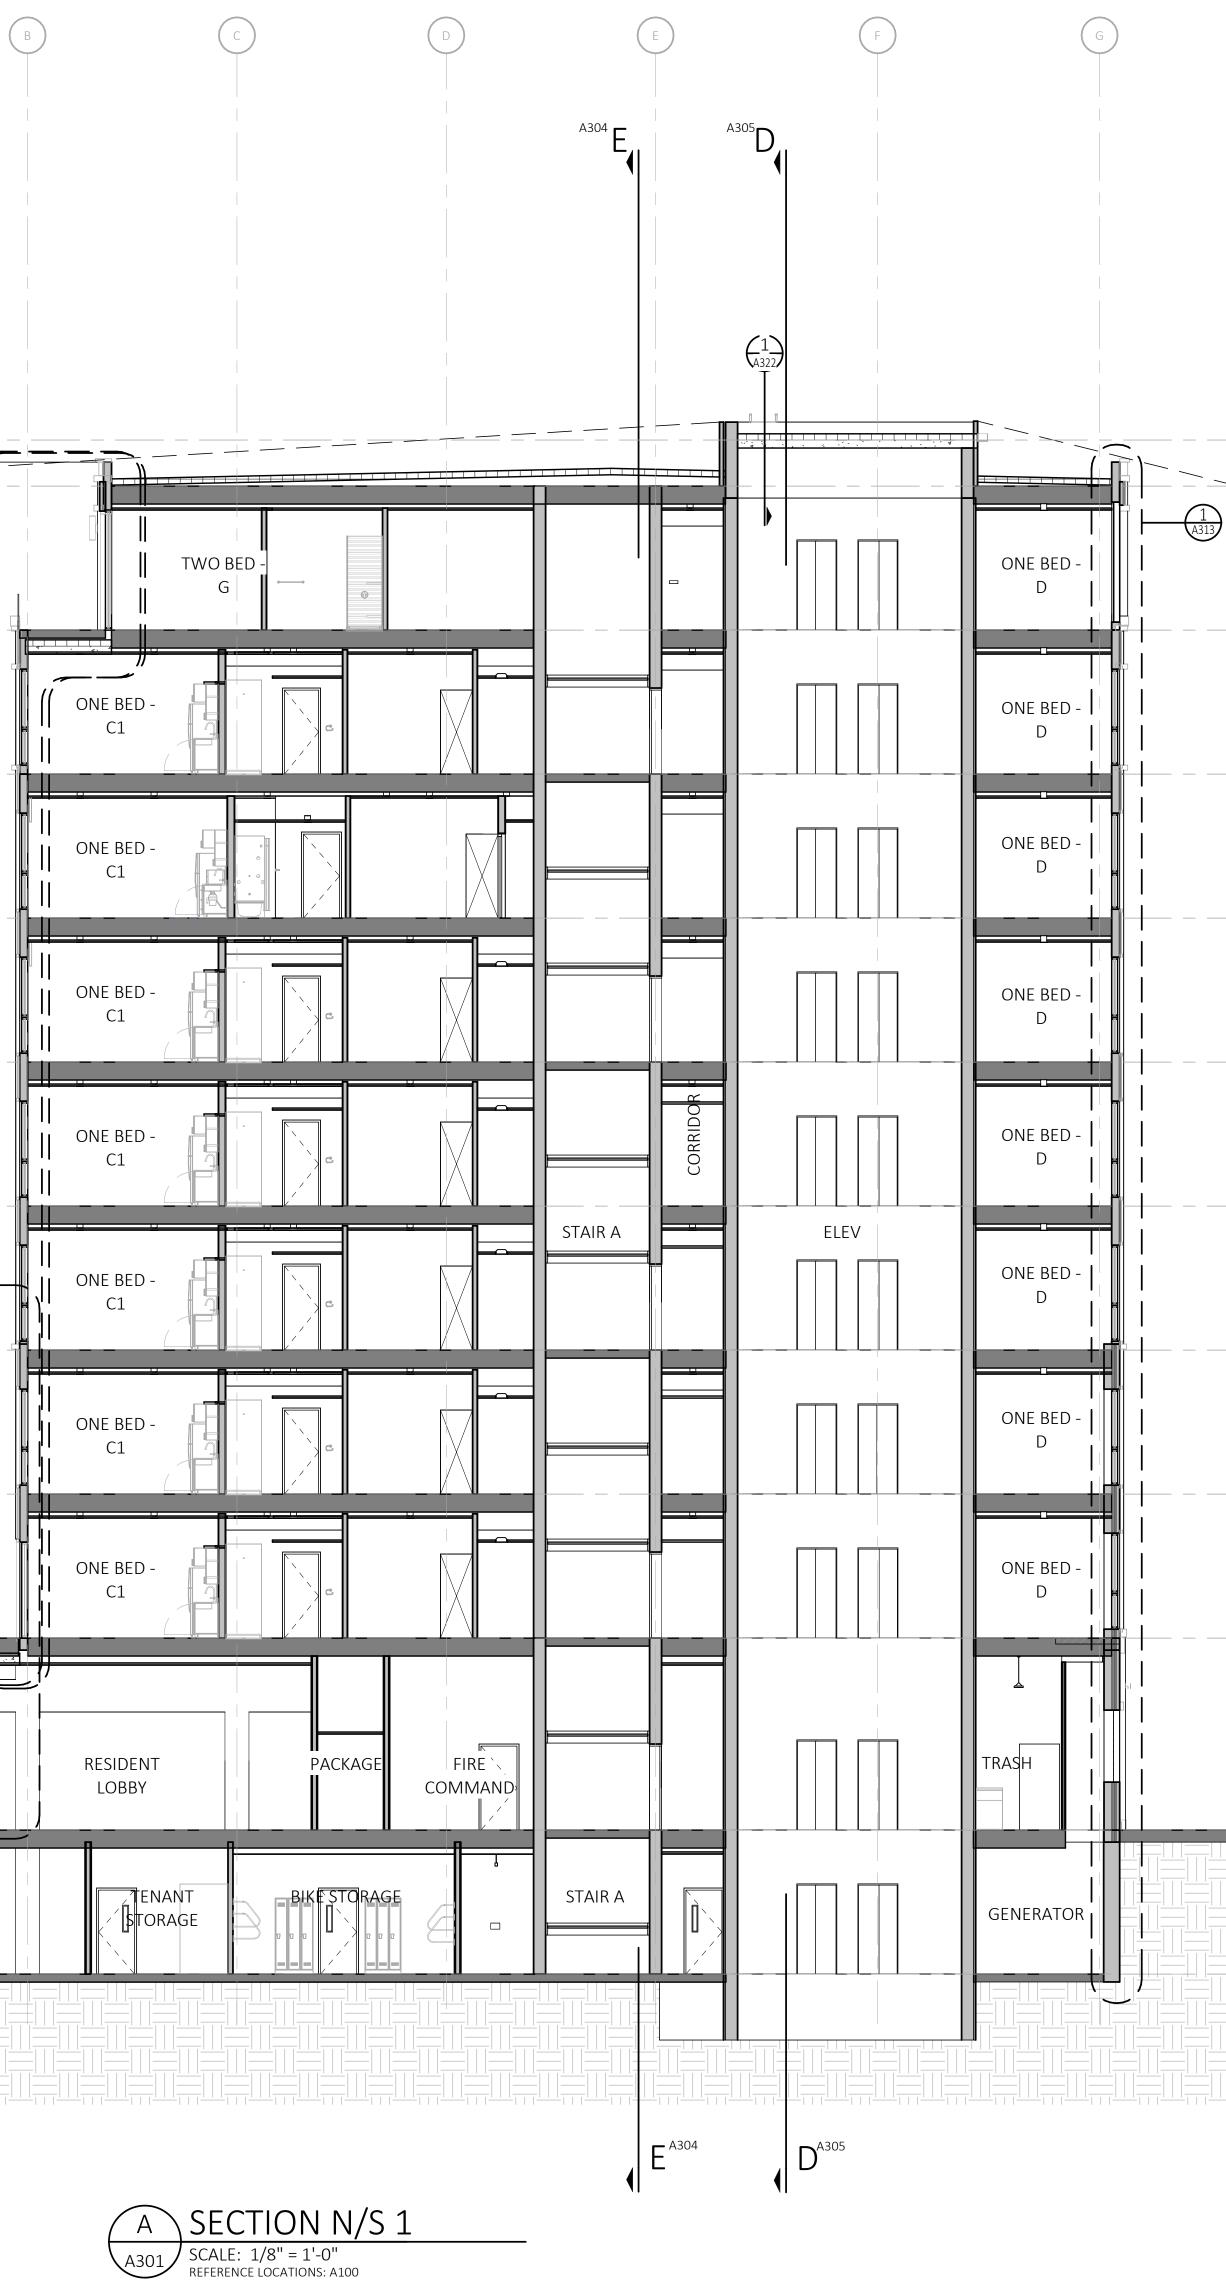

С


ALLEY	

	-		-		- 1 - 1
				-	
				-	
I I	-1 1 1		-		- 1 - 1
	-		-		-
	_				. 1 . 1
				-1 1 1	1 1
				-	
	1 1 1		1 1 1	-	1 1
	-		-		- 1 1
	_				1 1
	-1		-		-
<u> </u>				-	
				-	
				-	
	-1 1 1	1 1 1			1.1
	-1		-		-
	-	1 1 1	-		-1 1
				-	_
				_	
				-	
I I	-1 1 1	- 1 1	-		-
	-		-		-
	_		-		- 1 1
				-1 1 1	1 1
				-	
	1 1 1		1 1 1	-	1 1
	-		-		- 1 1
	_				1 1
<del></del>	-		-		-
<u> </u>				-	
		1 1 1			








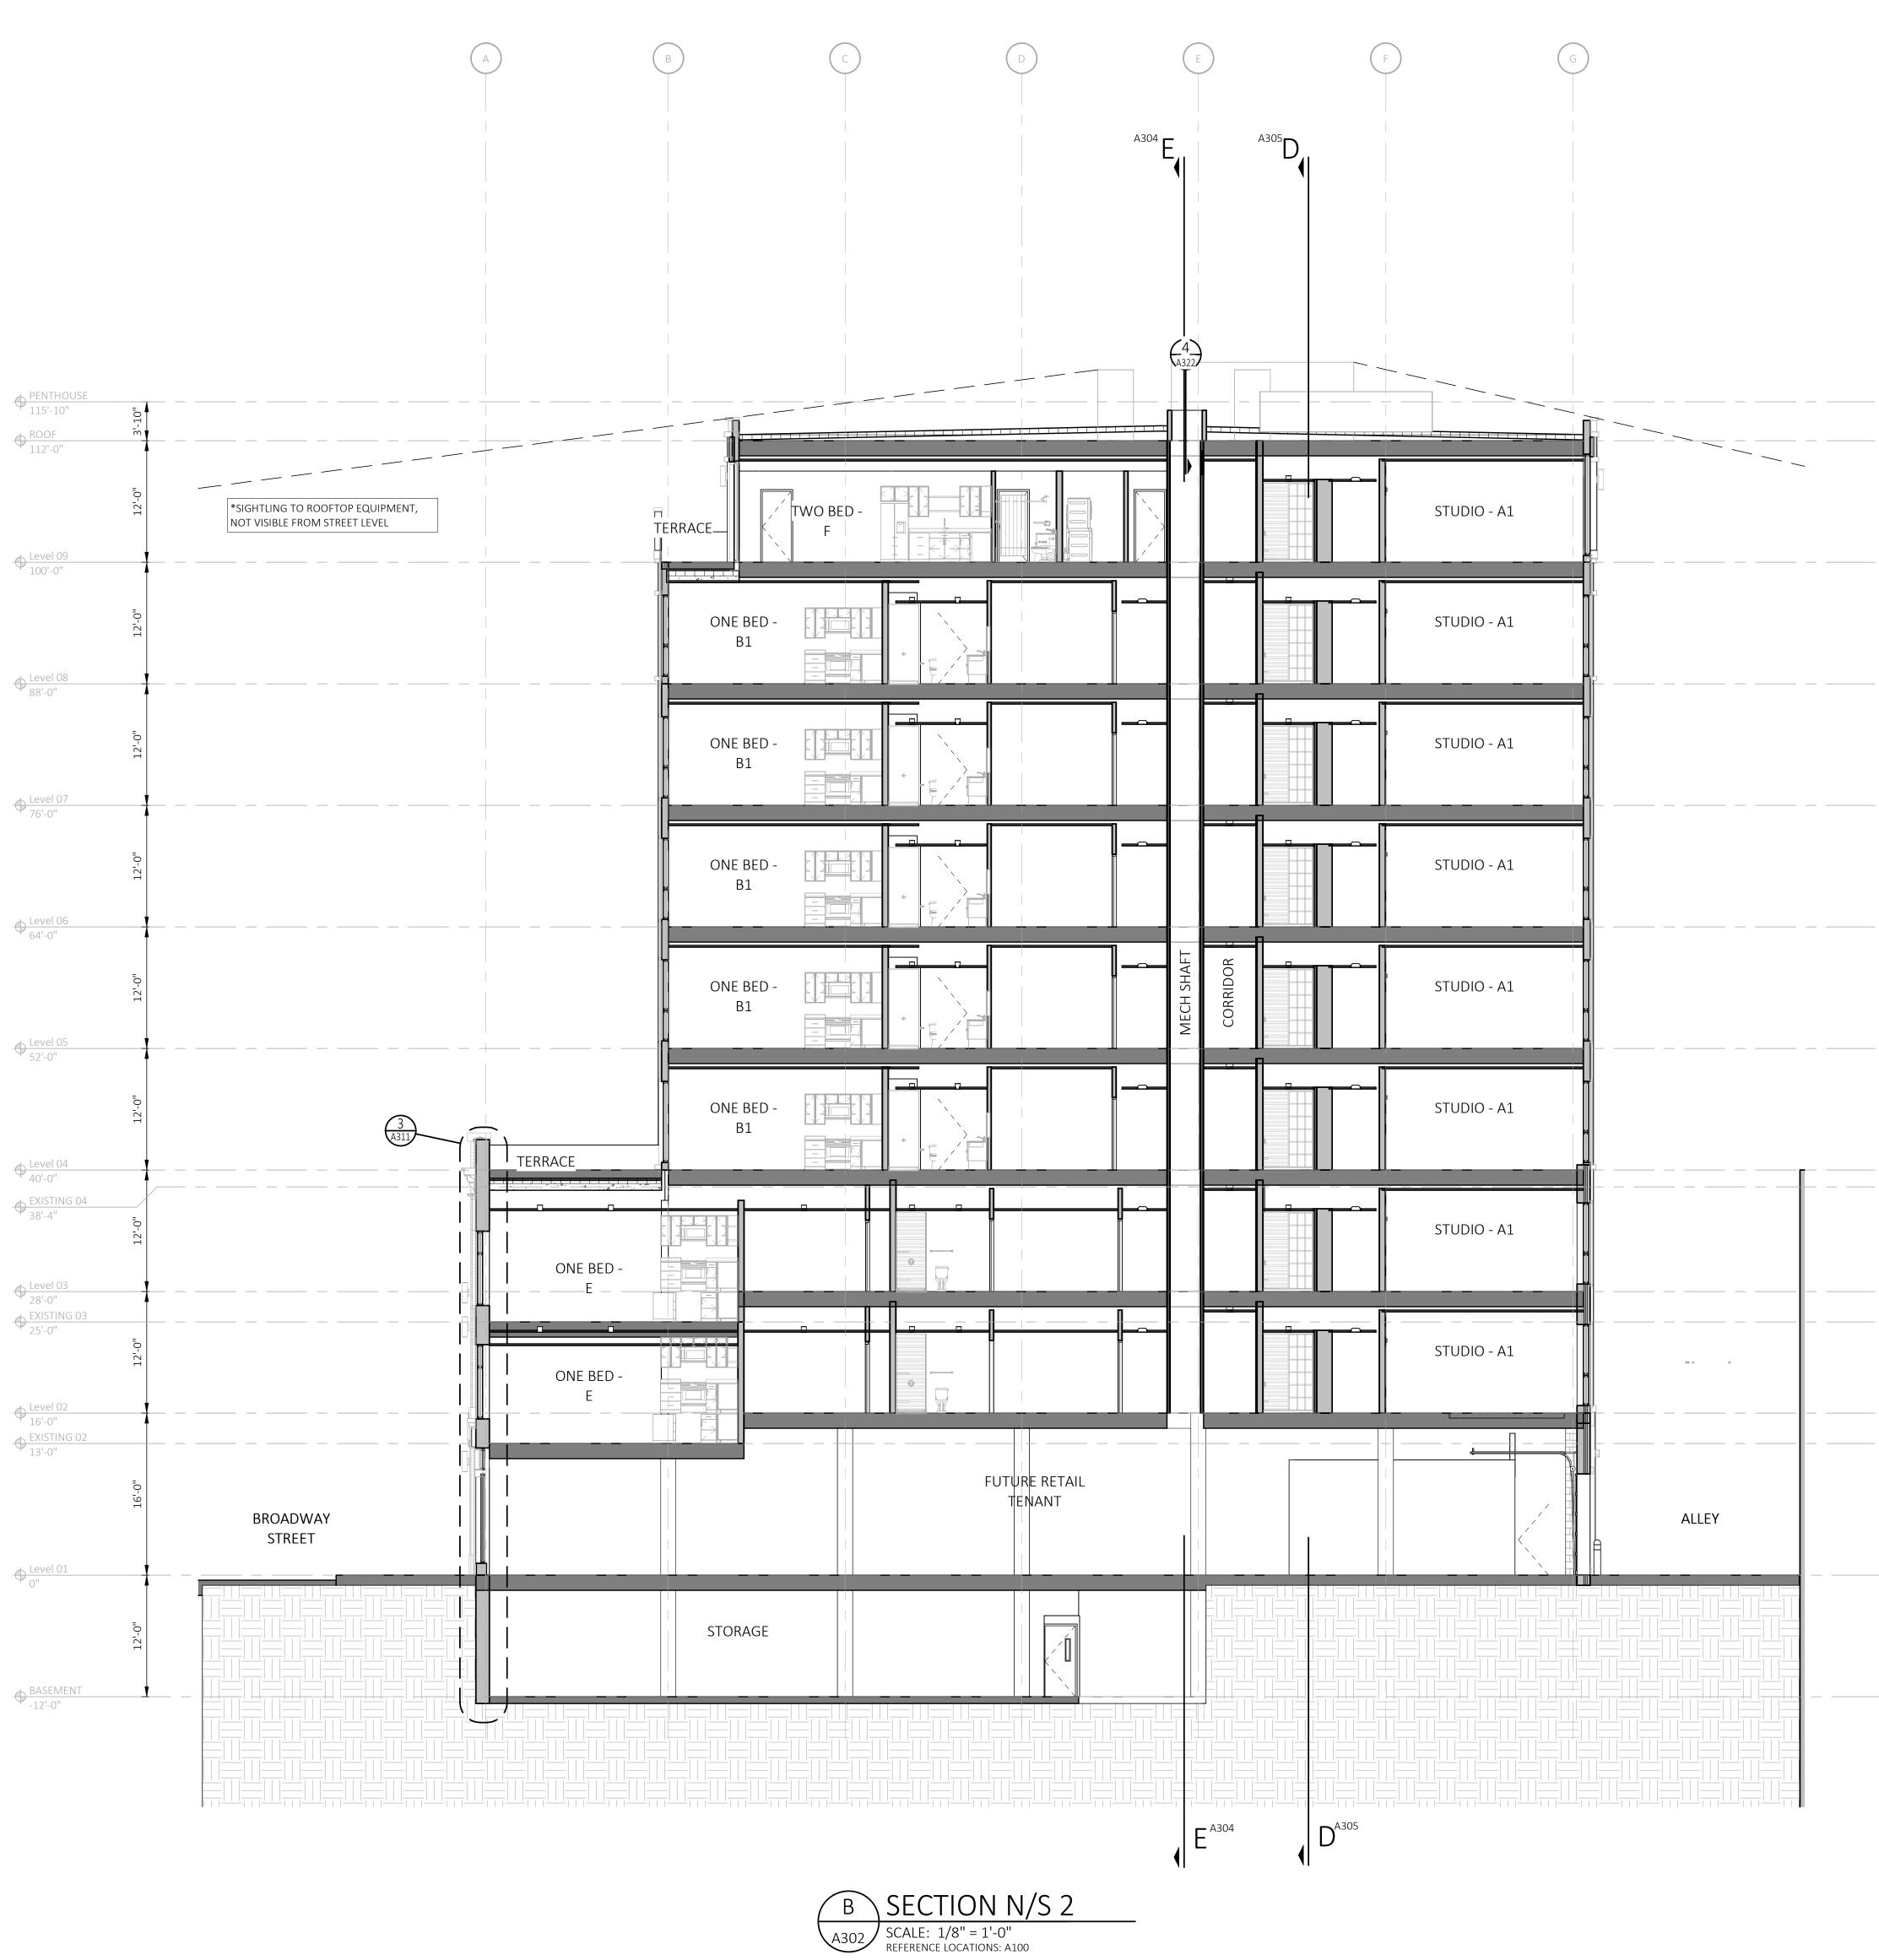




D

С








Α




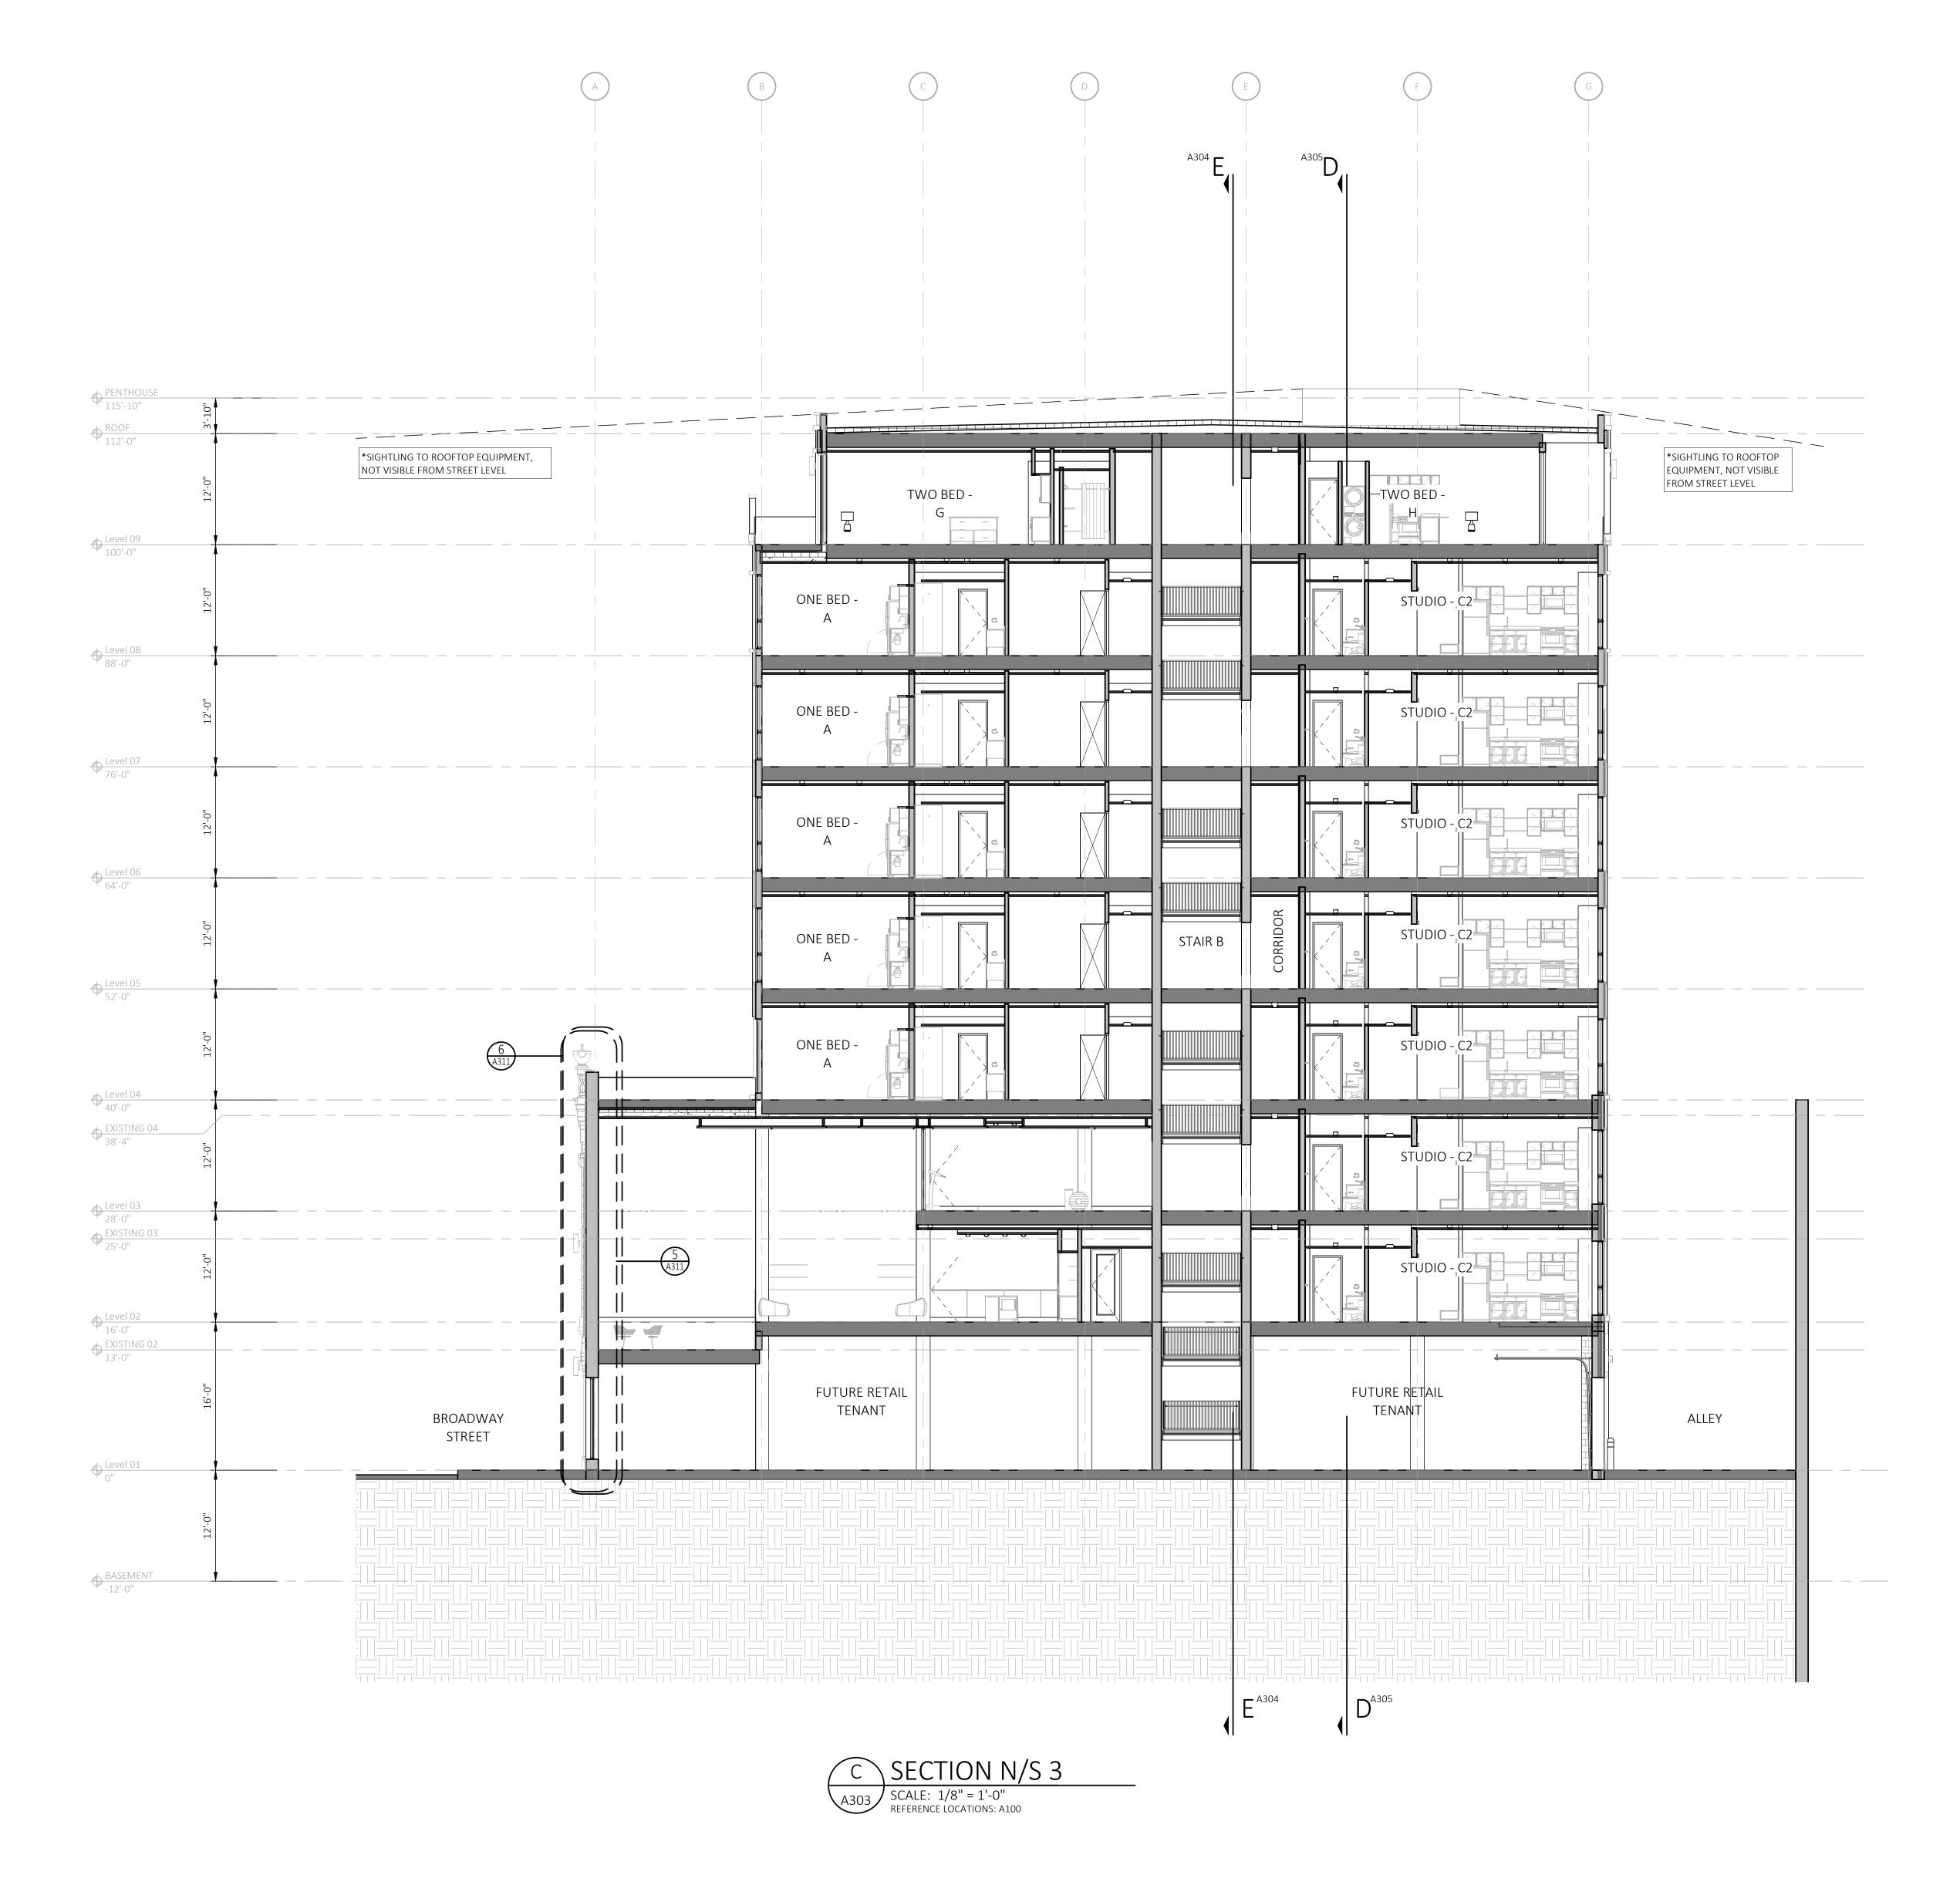

D


4


С





Α

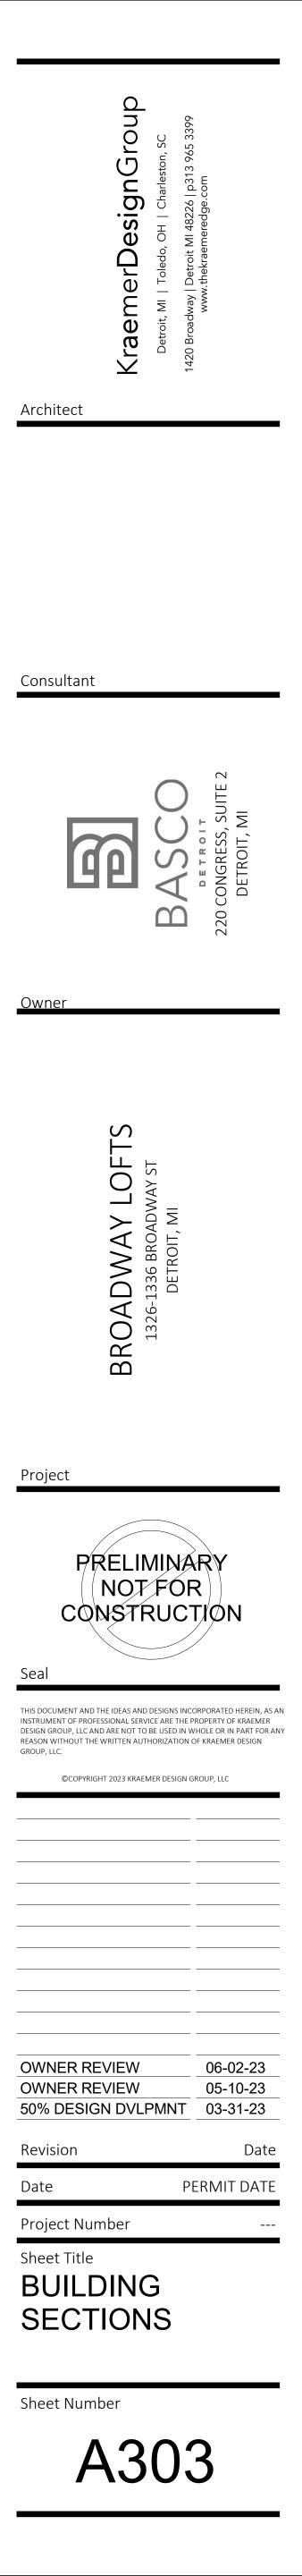

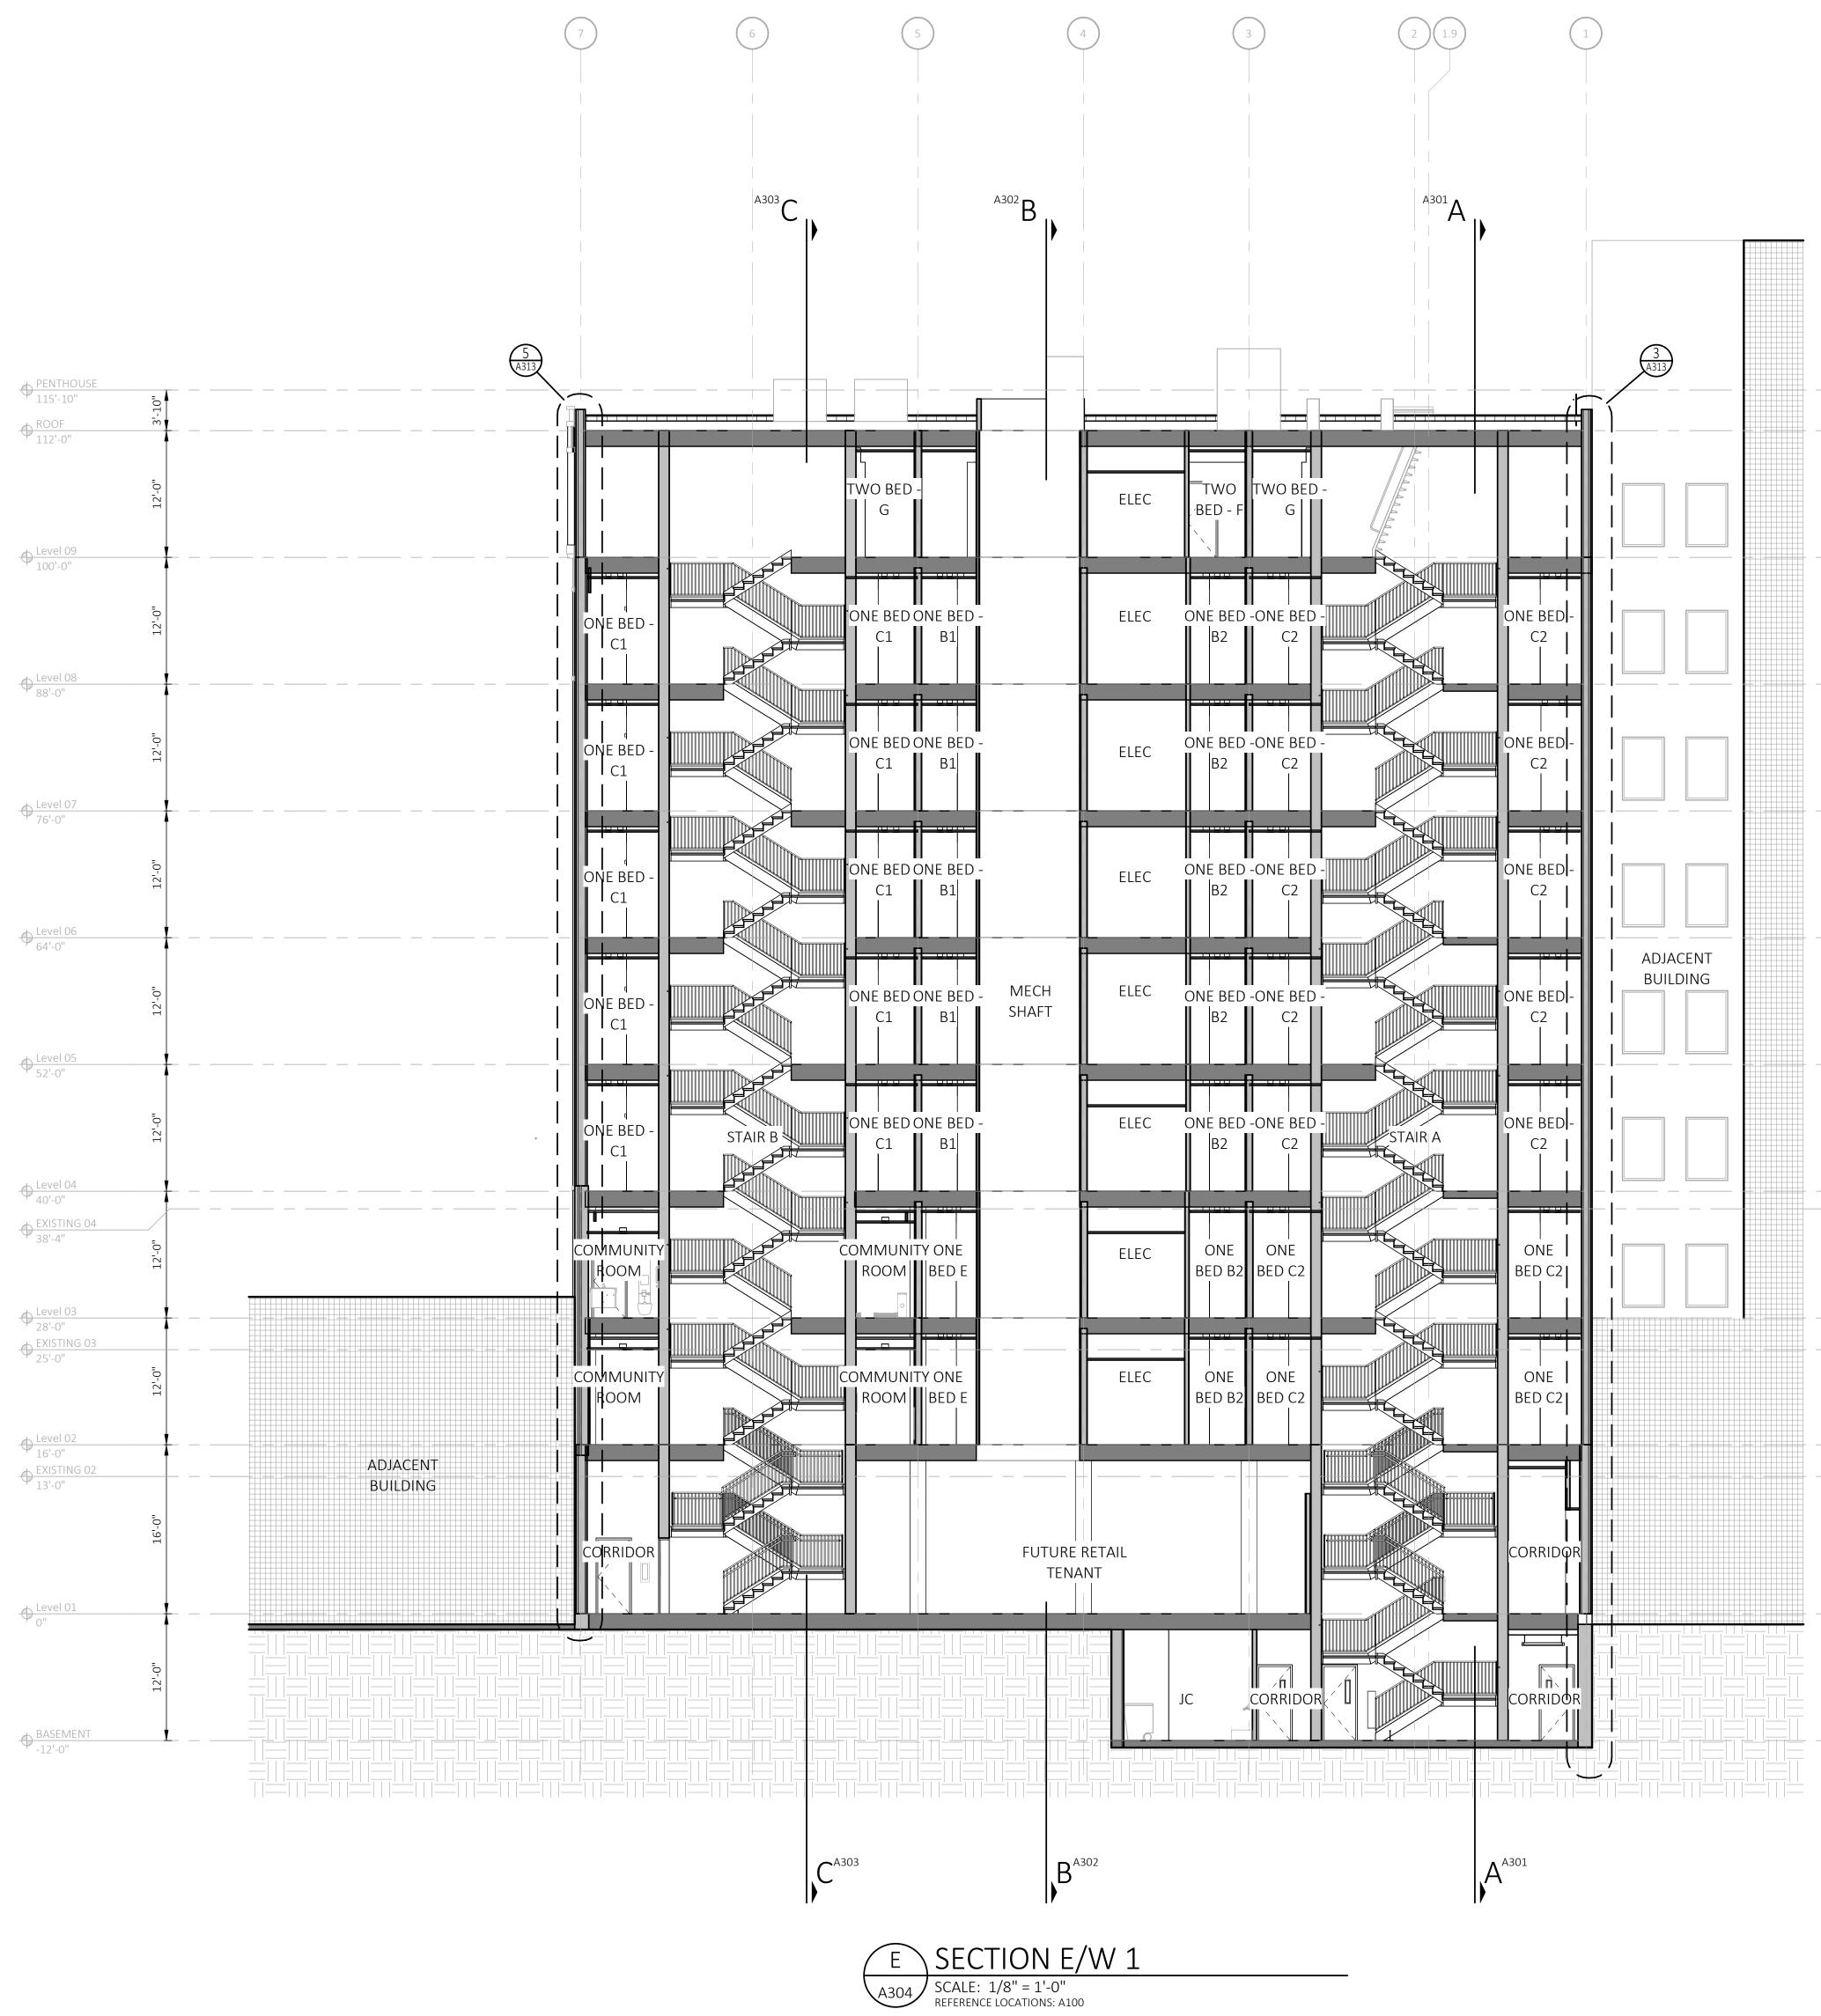


4

3


D

С

PROJECT NORTH NORTH





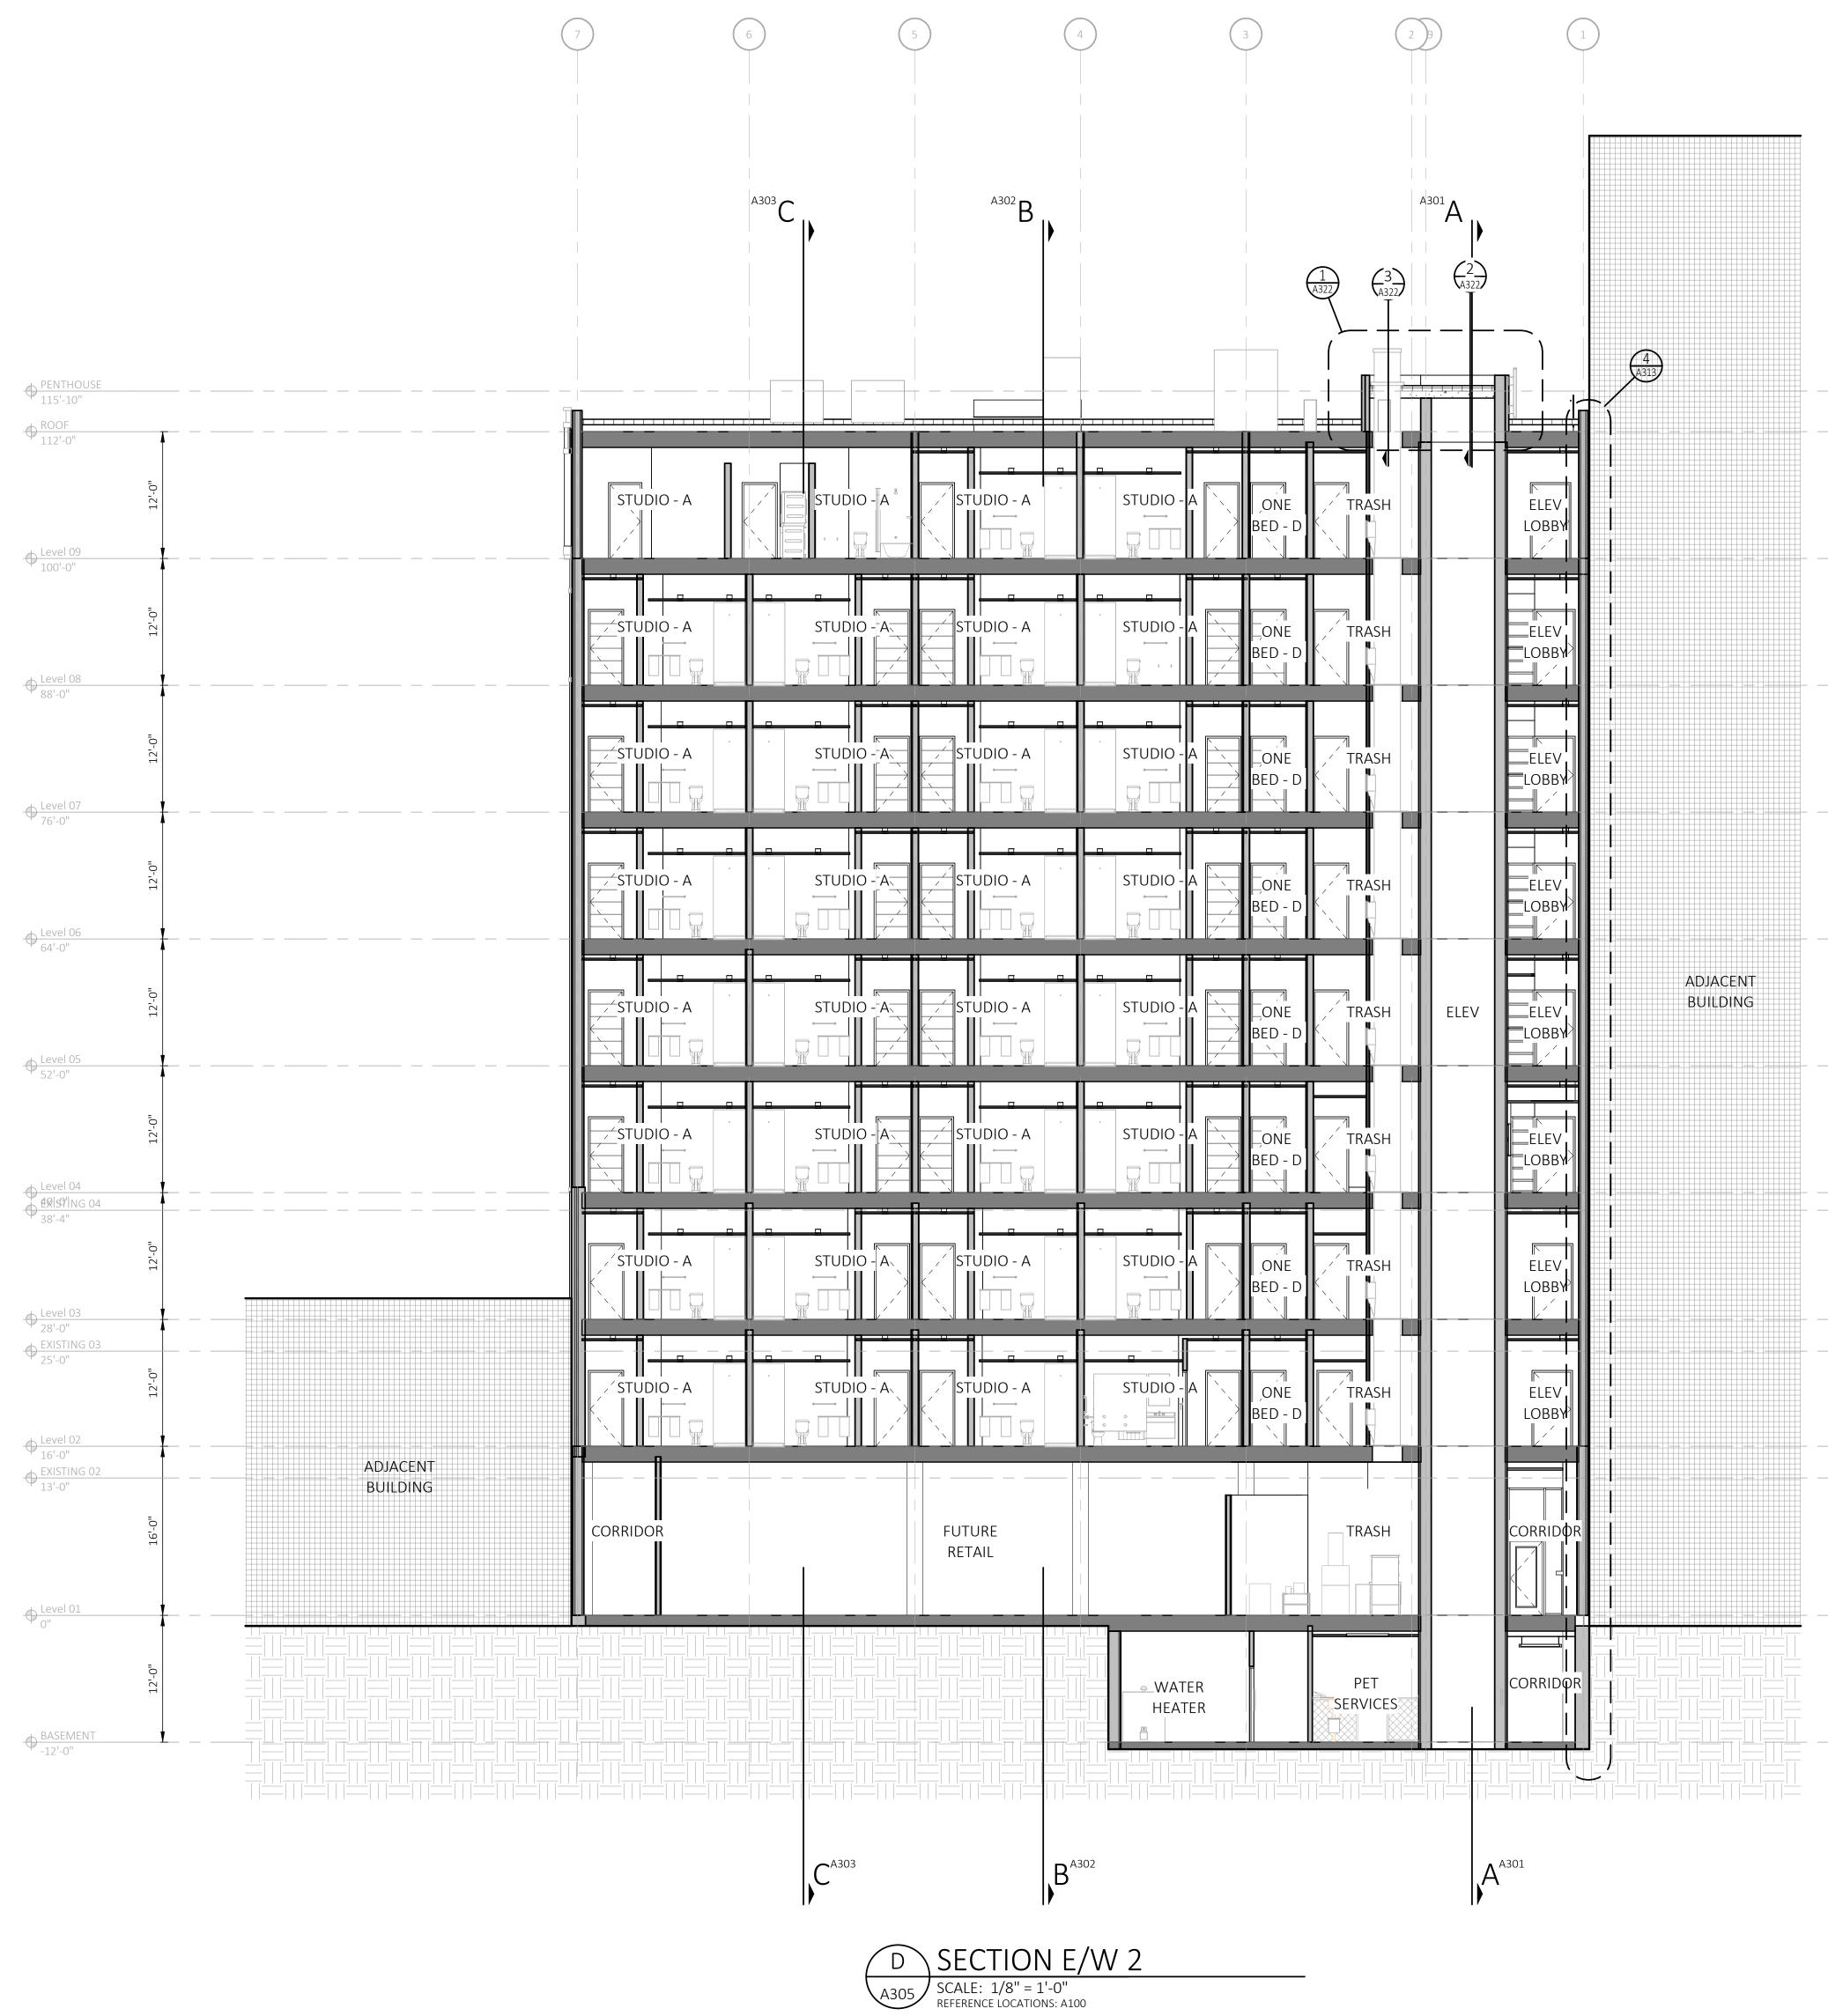


D




3

С





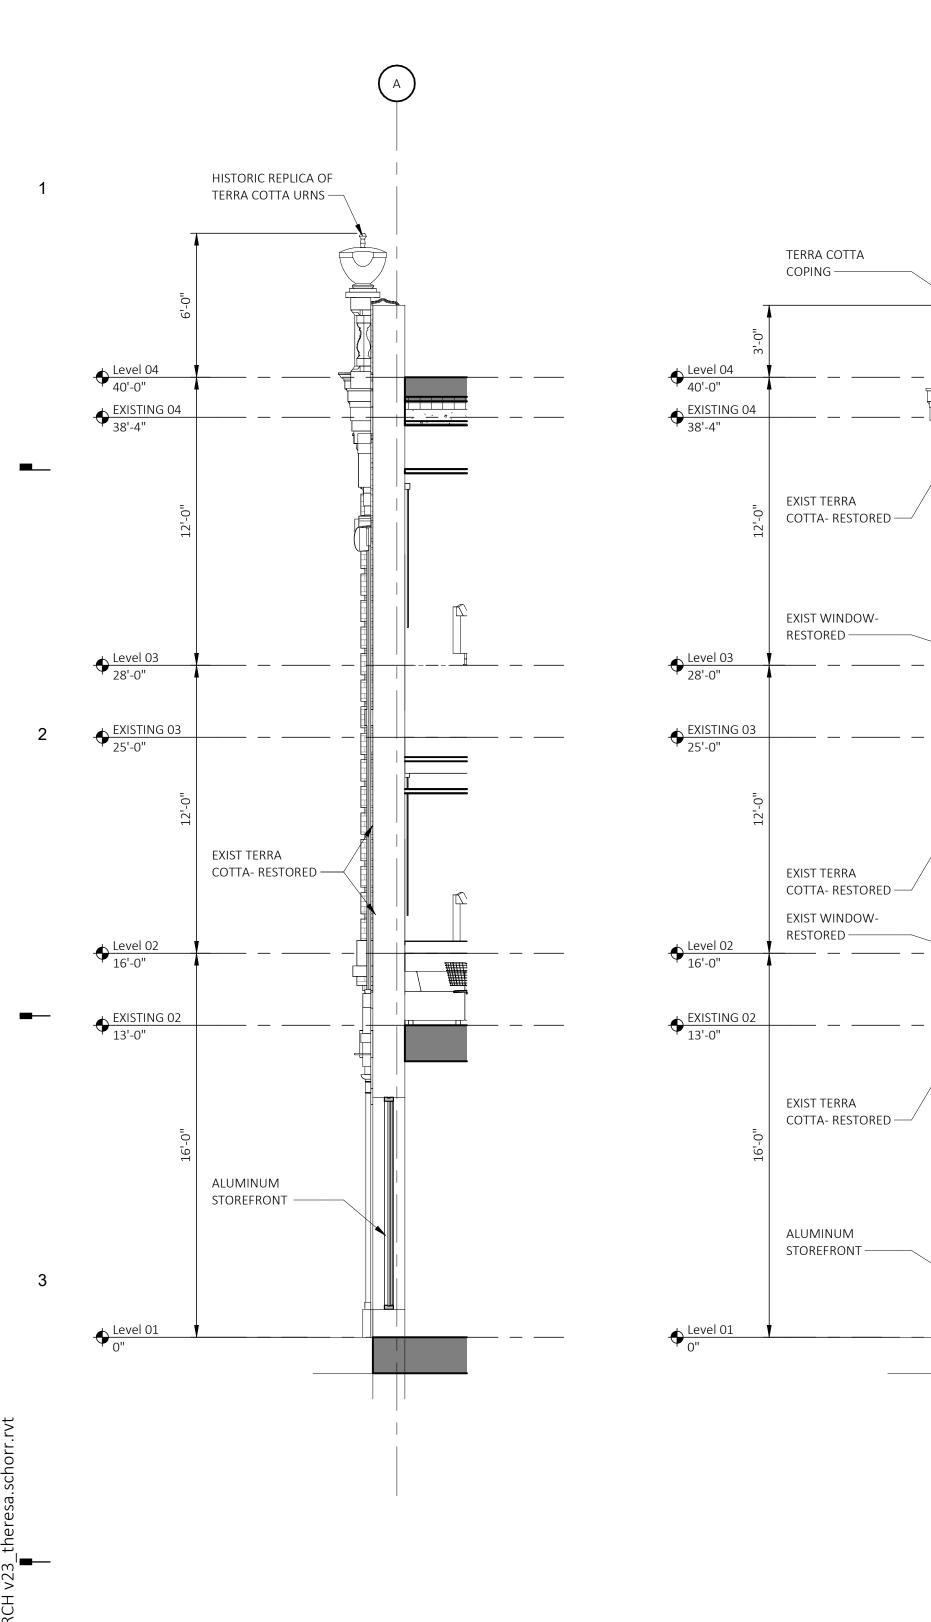

1322 SOUTH WALL SECTION

1322 SOUTH WALL SECTION 5 A311 SCALE: 1/4" = 1'-0" REFERENCE LOCATIONS: 01

4

6

A311


SCALE: 1/4" = 1'-0" REFERENCE LOCATIONS: A303

\_ \_\_\_\_ \_ \_\_\_


\_\_\_\_\_

\_\_\_\_

\_ \_\_\_

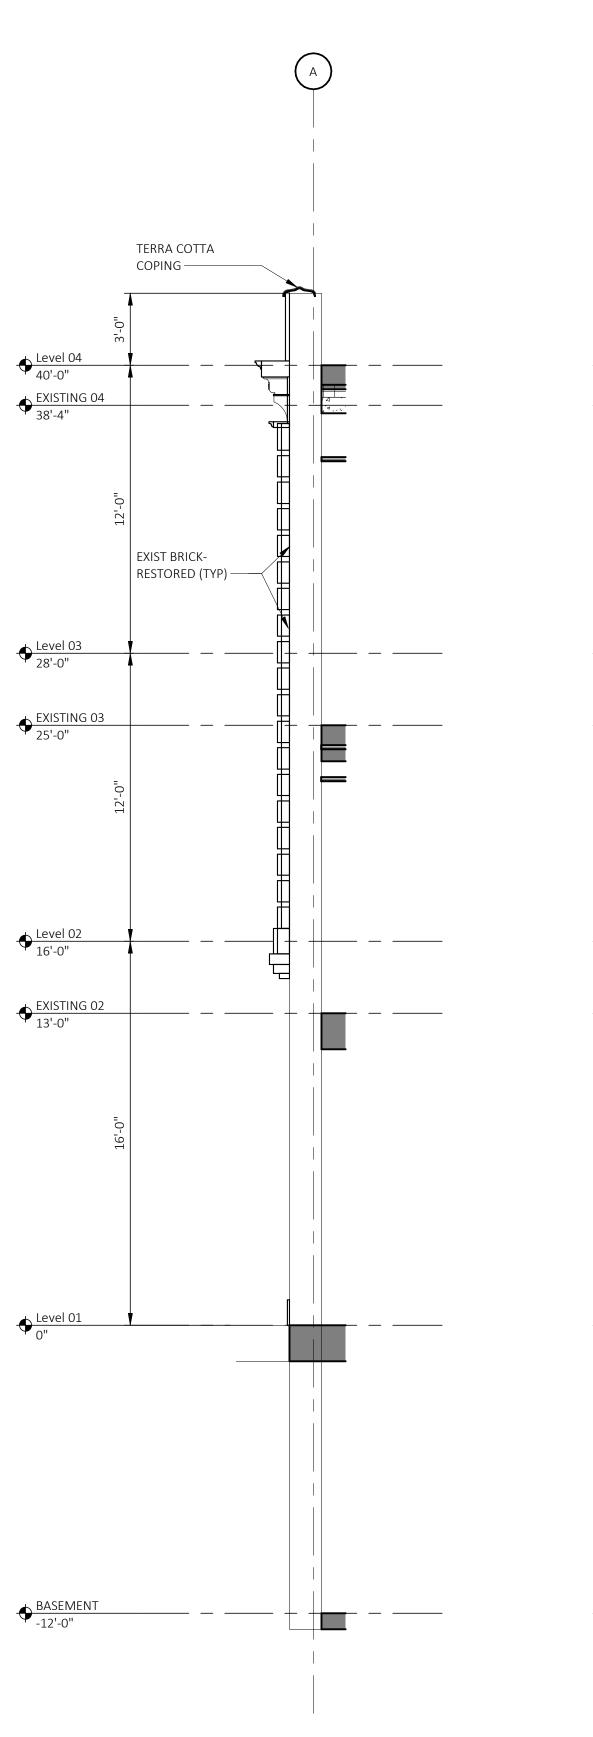



С

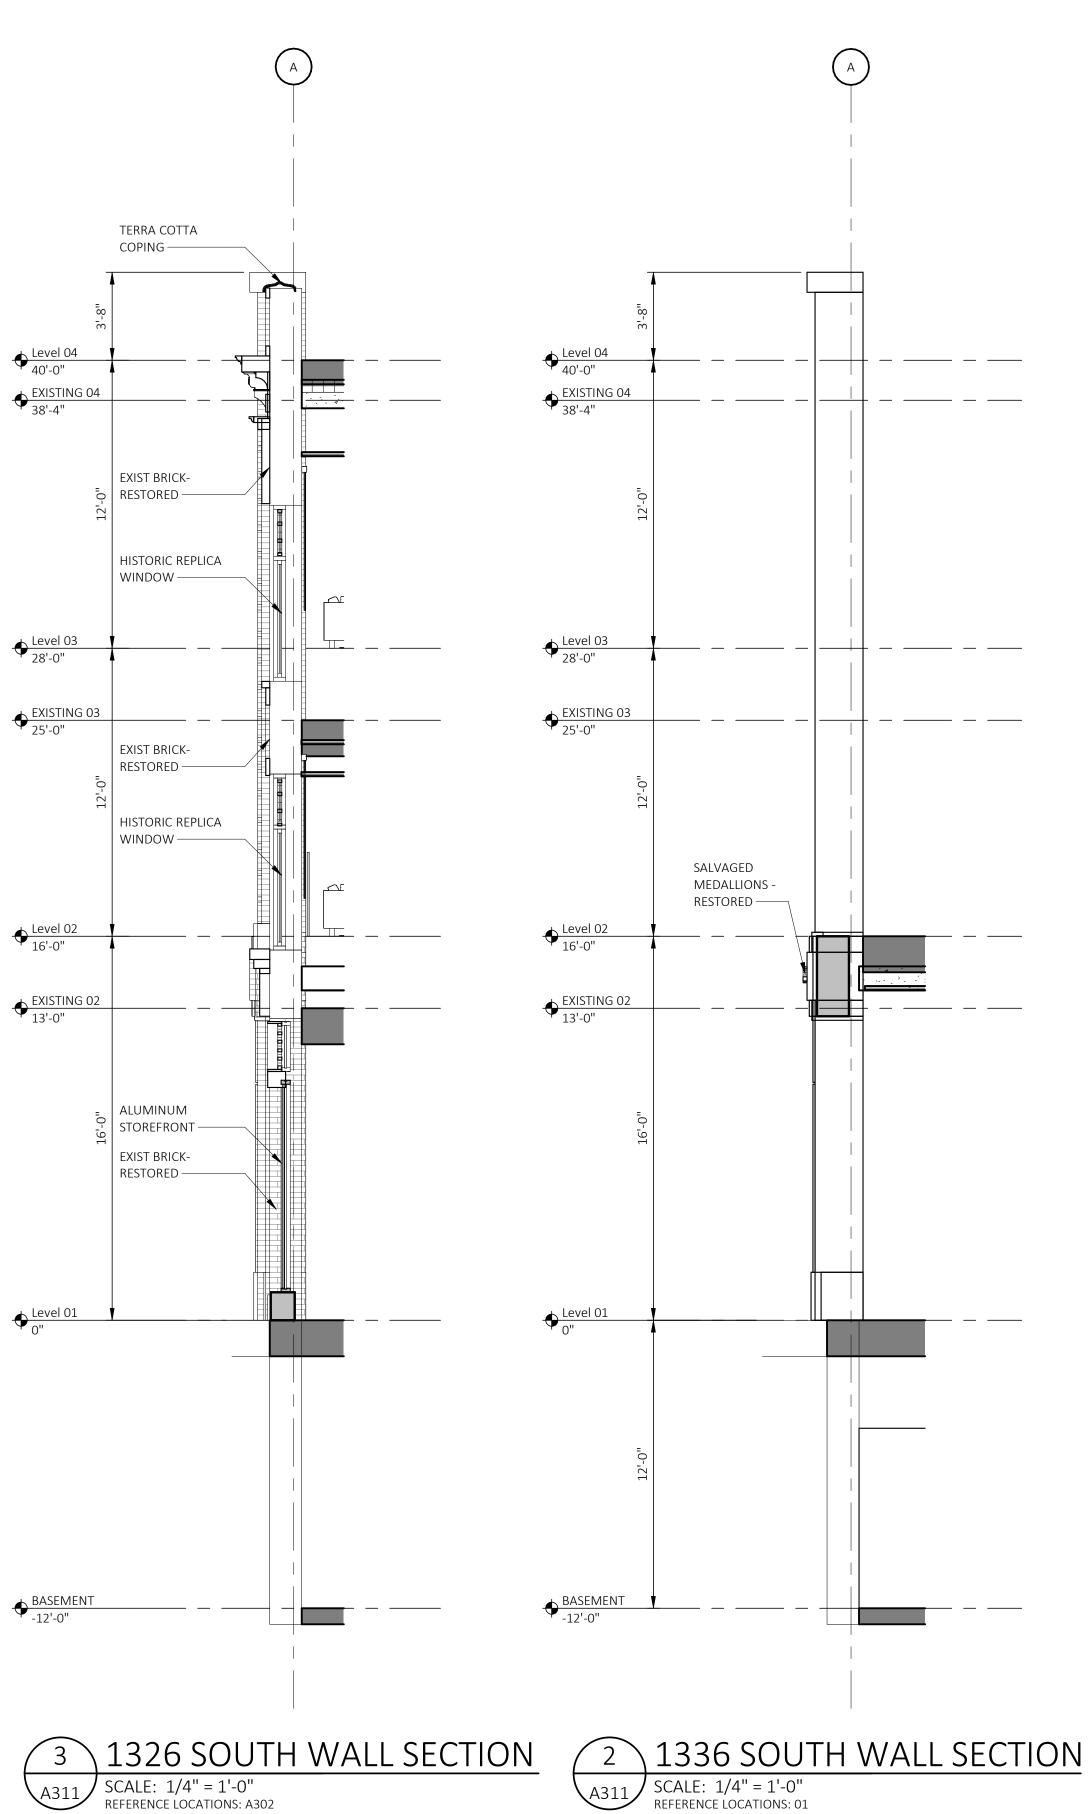


1326 SOUTH WALL SECTION (4) A311 SCALE: 1/4" = 1'-0" REFERENCE LOCATIONS: 01


3 1326 SOUTH WALL SECTION A311 SCALE: 1/4" = 1'-0" REFERENCE LOCATIONS: A302

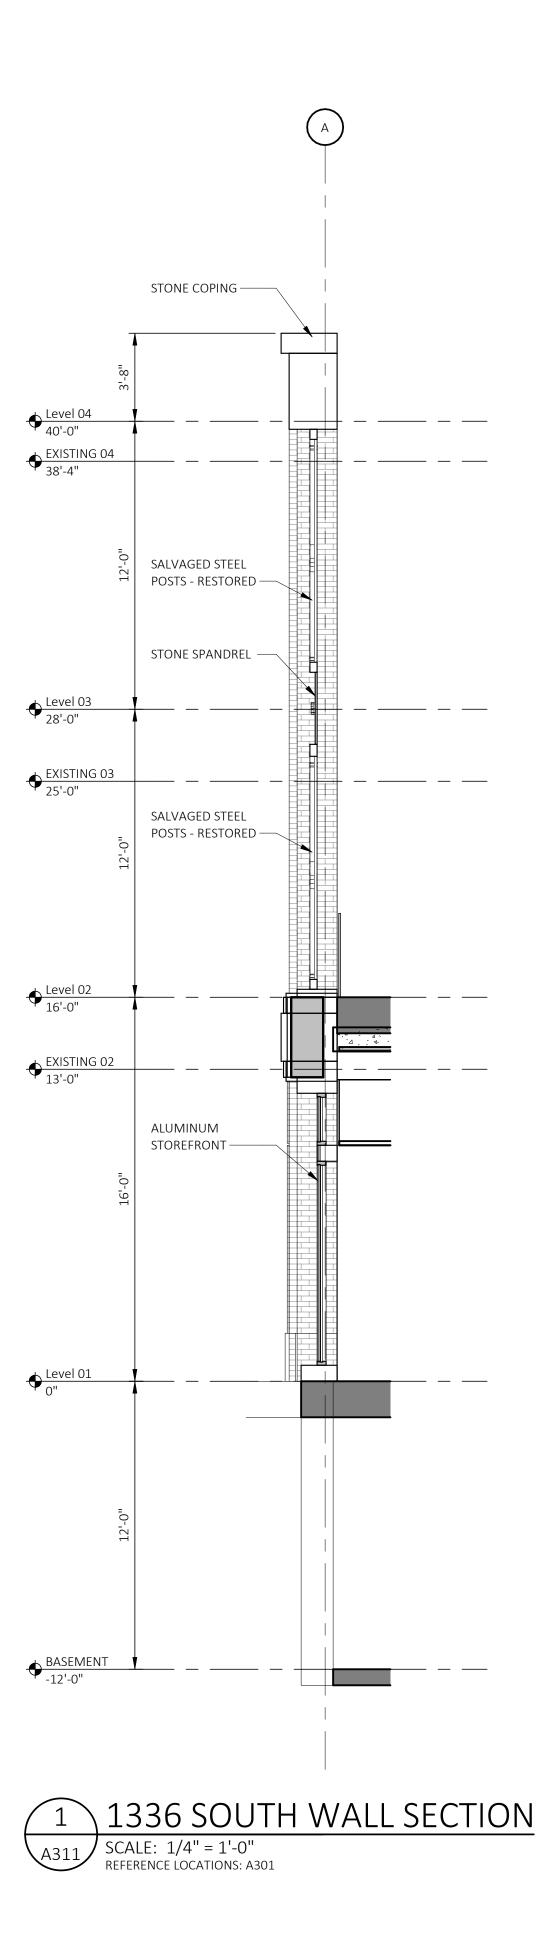







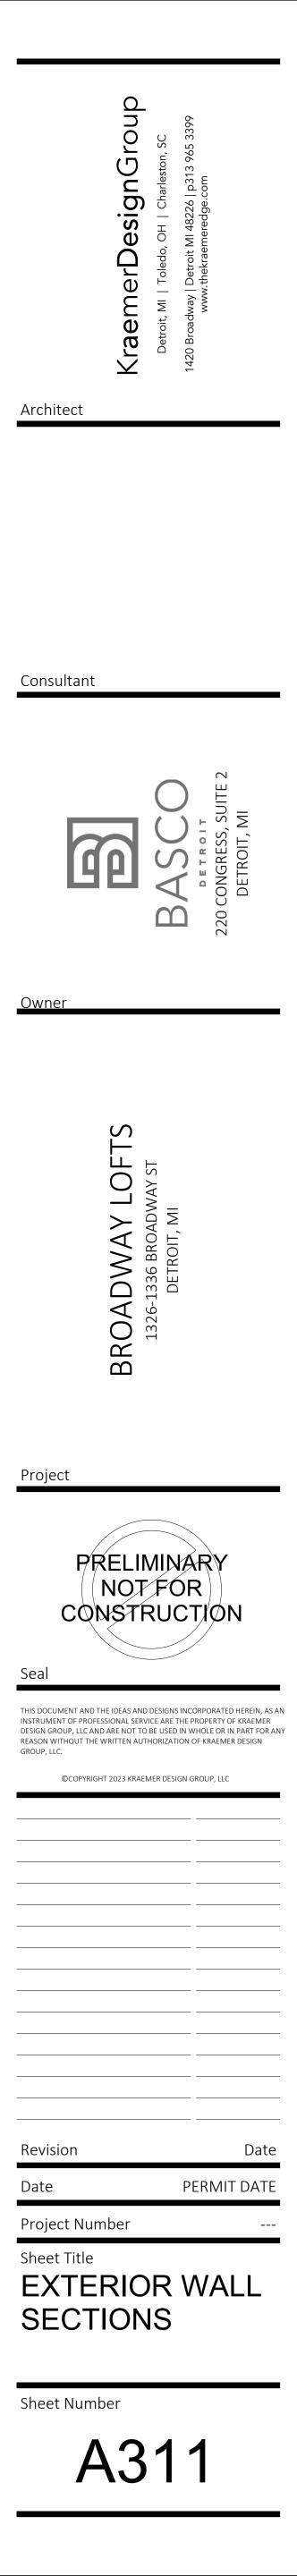

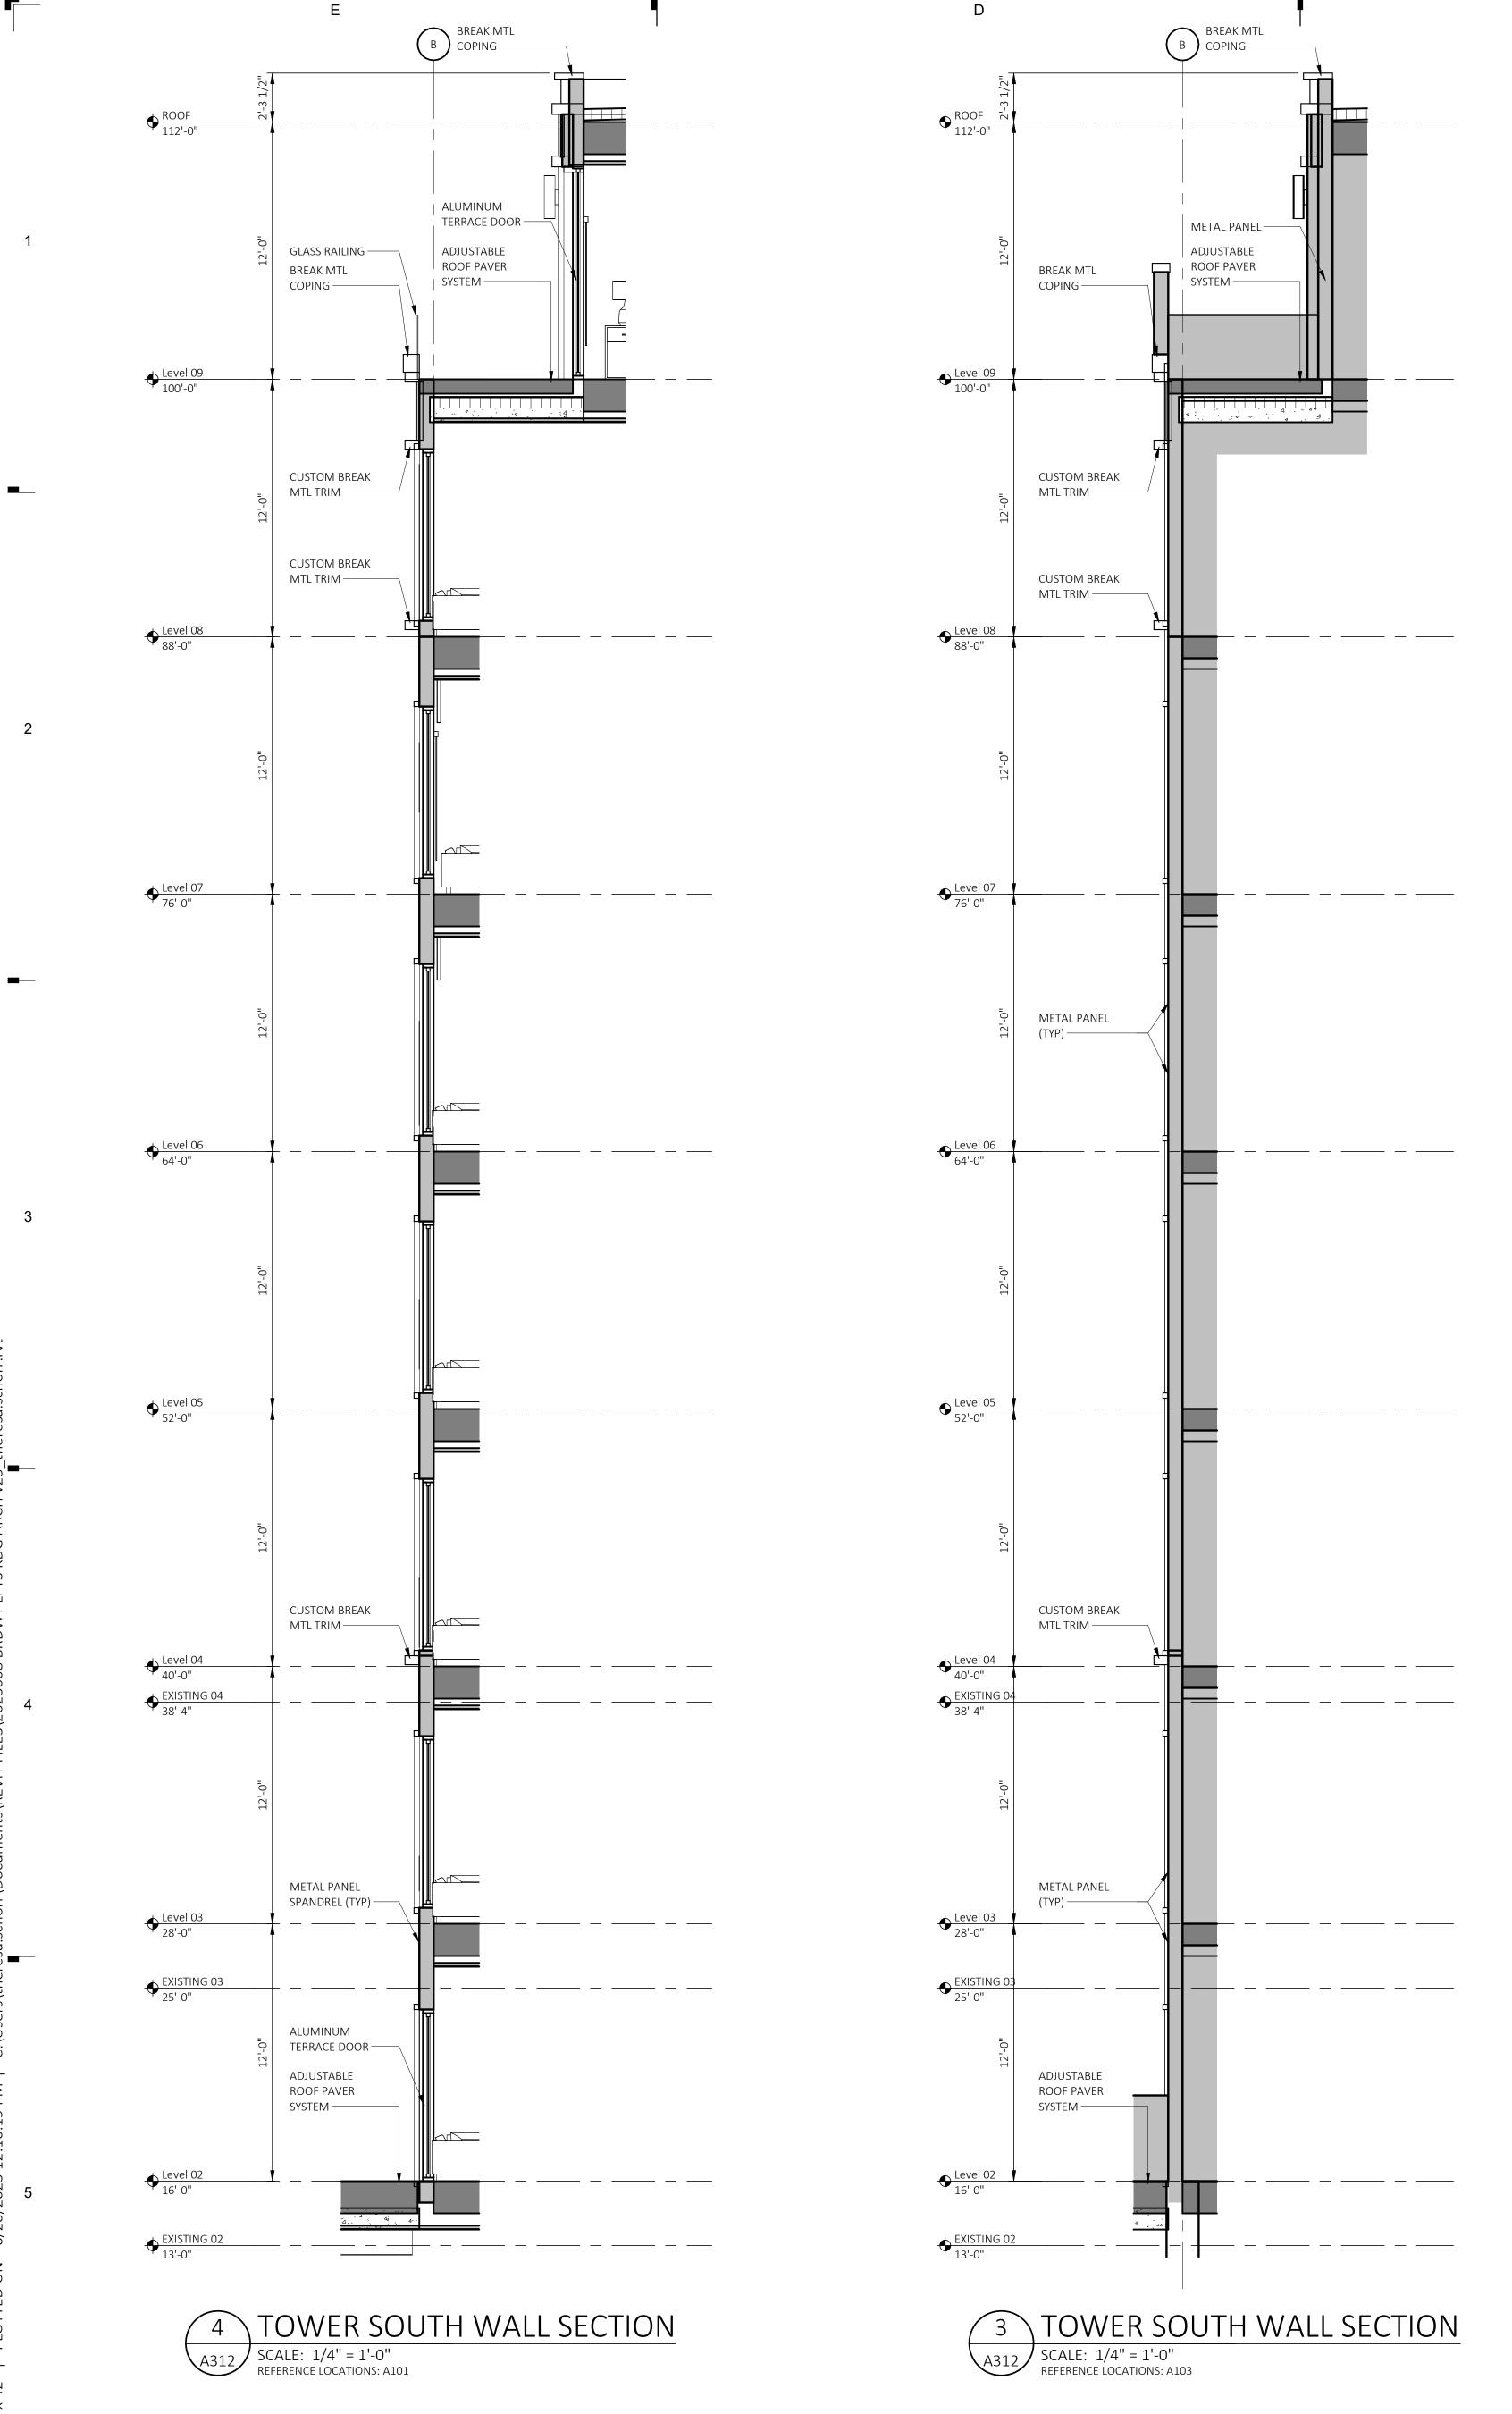


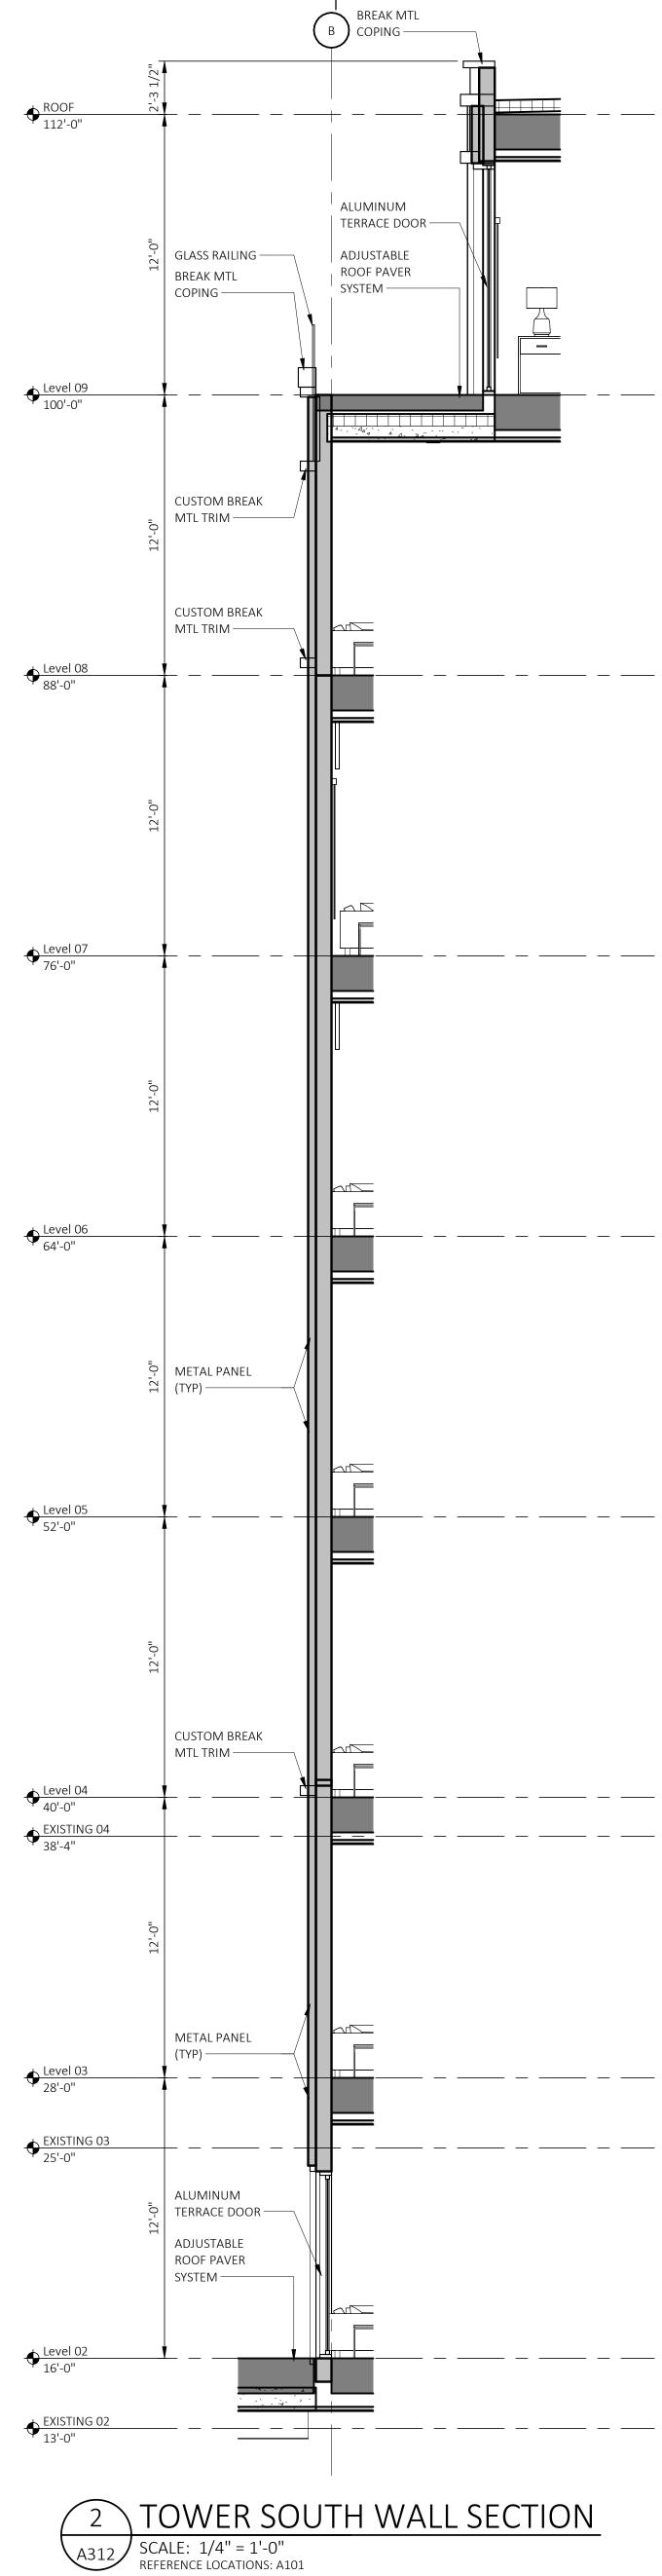



С

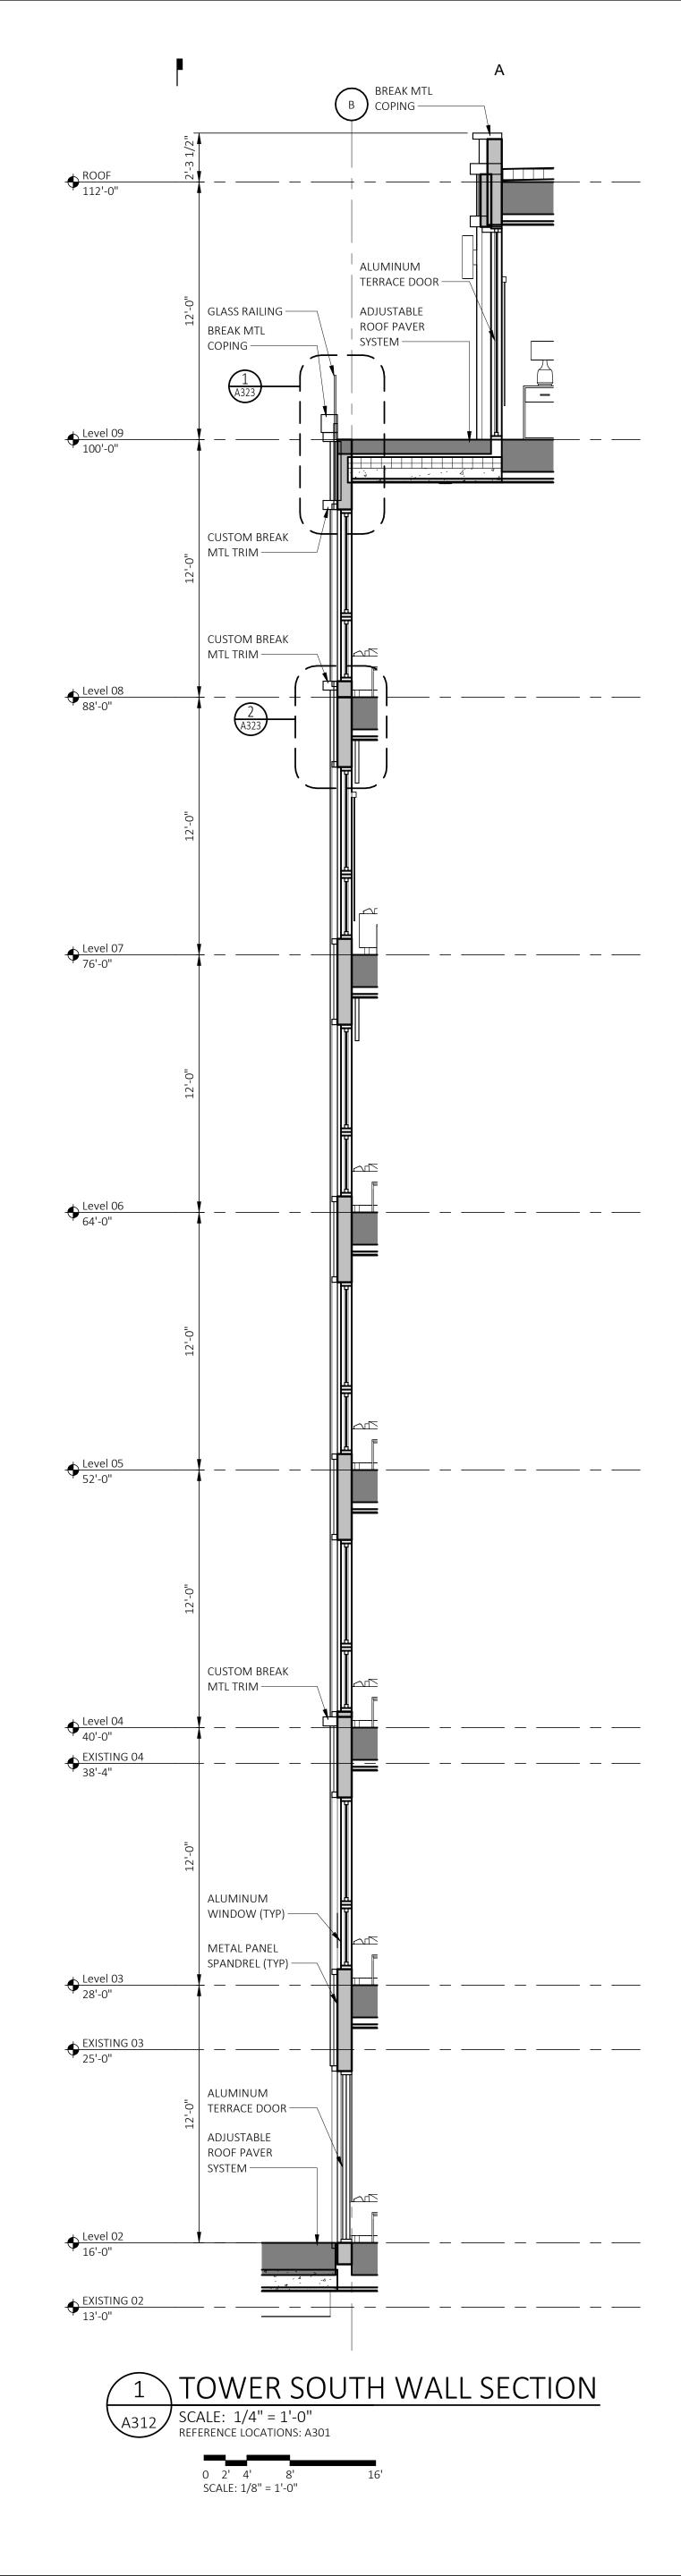



\_ \_\_\_

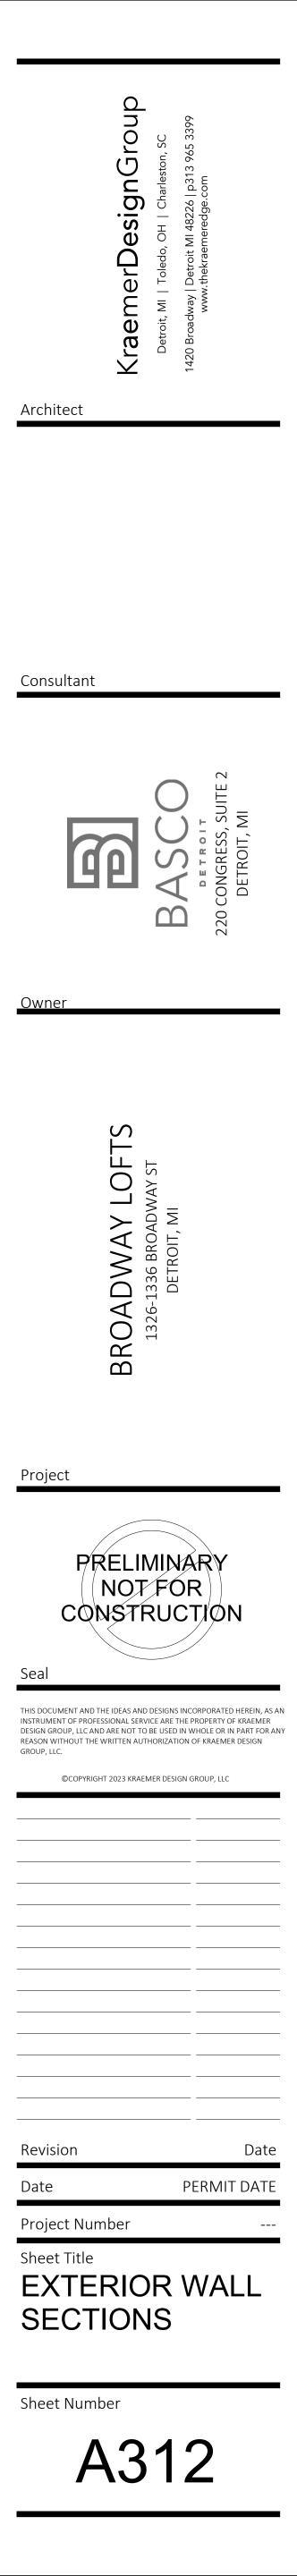

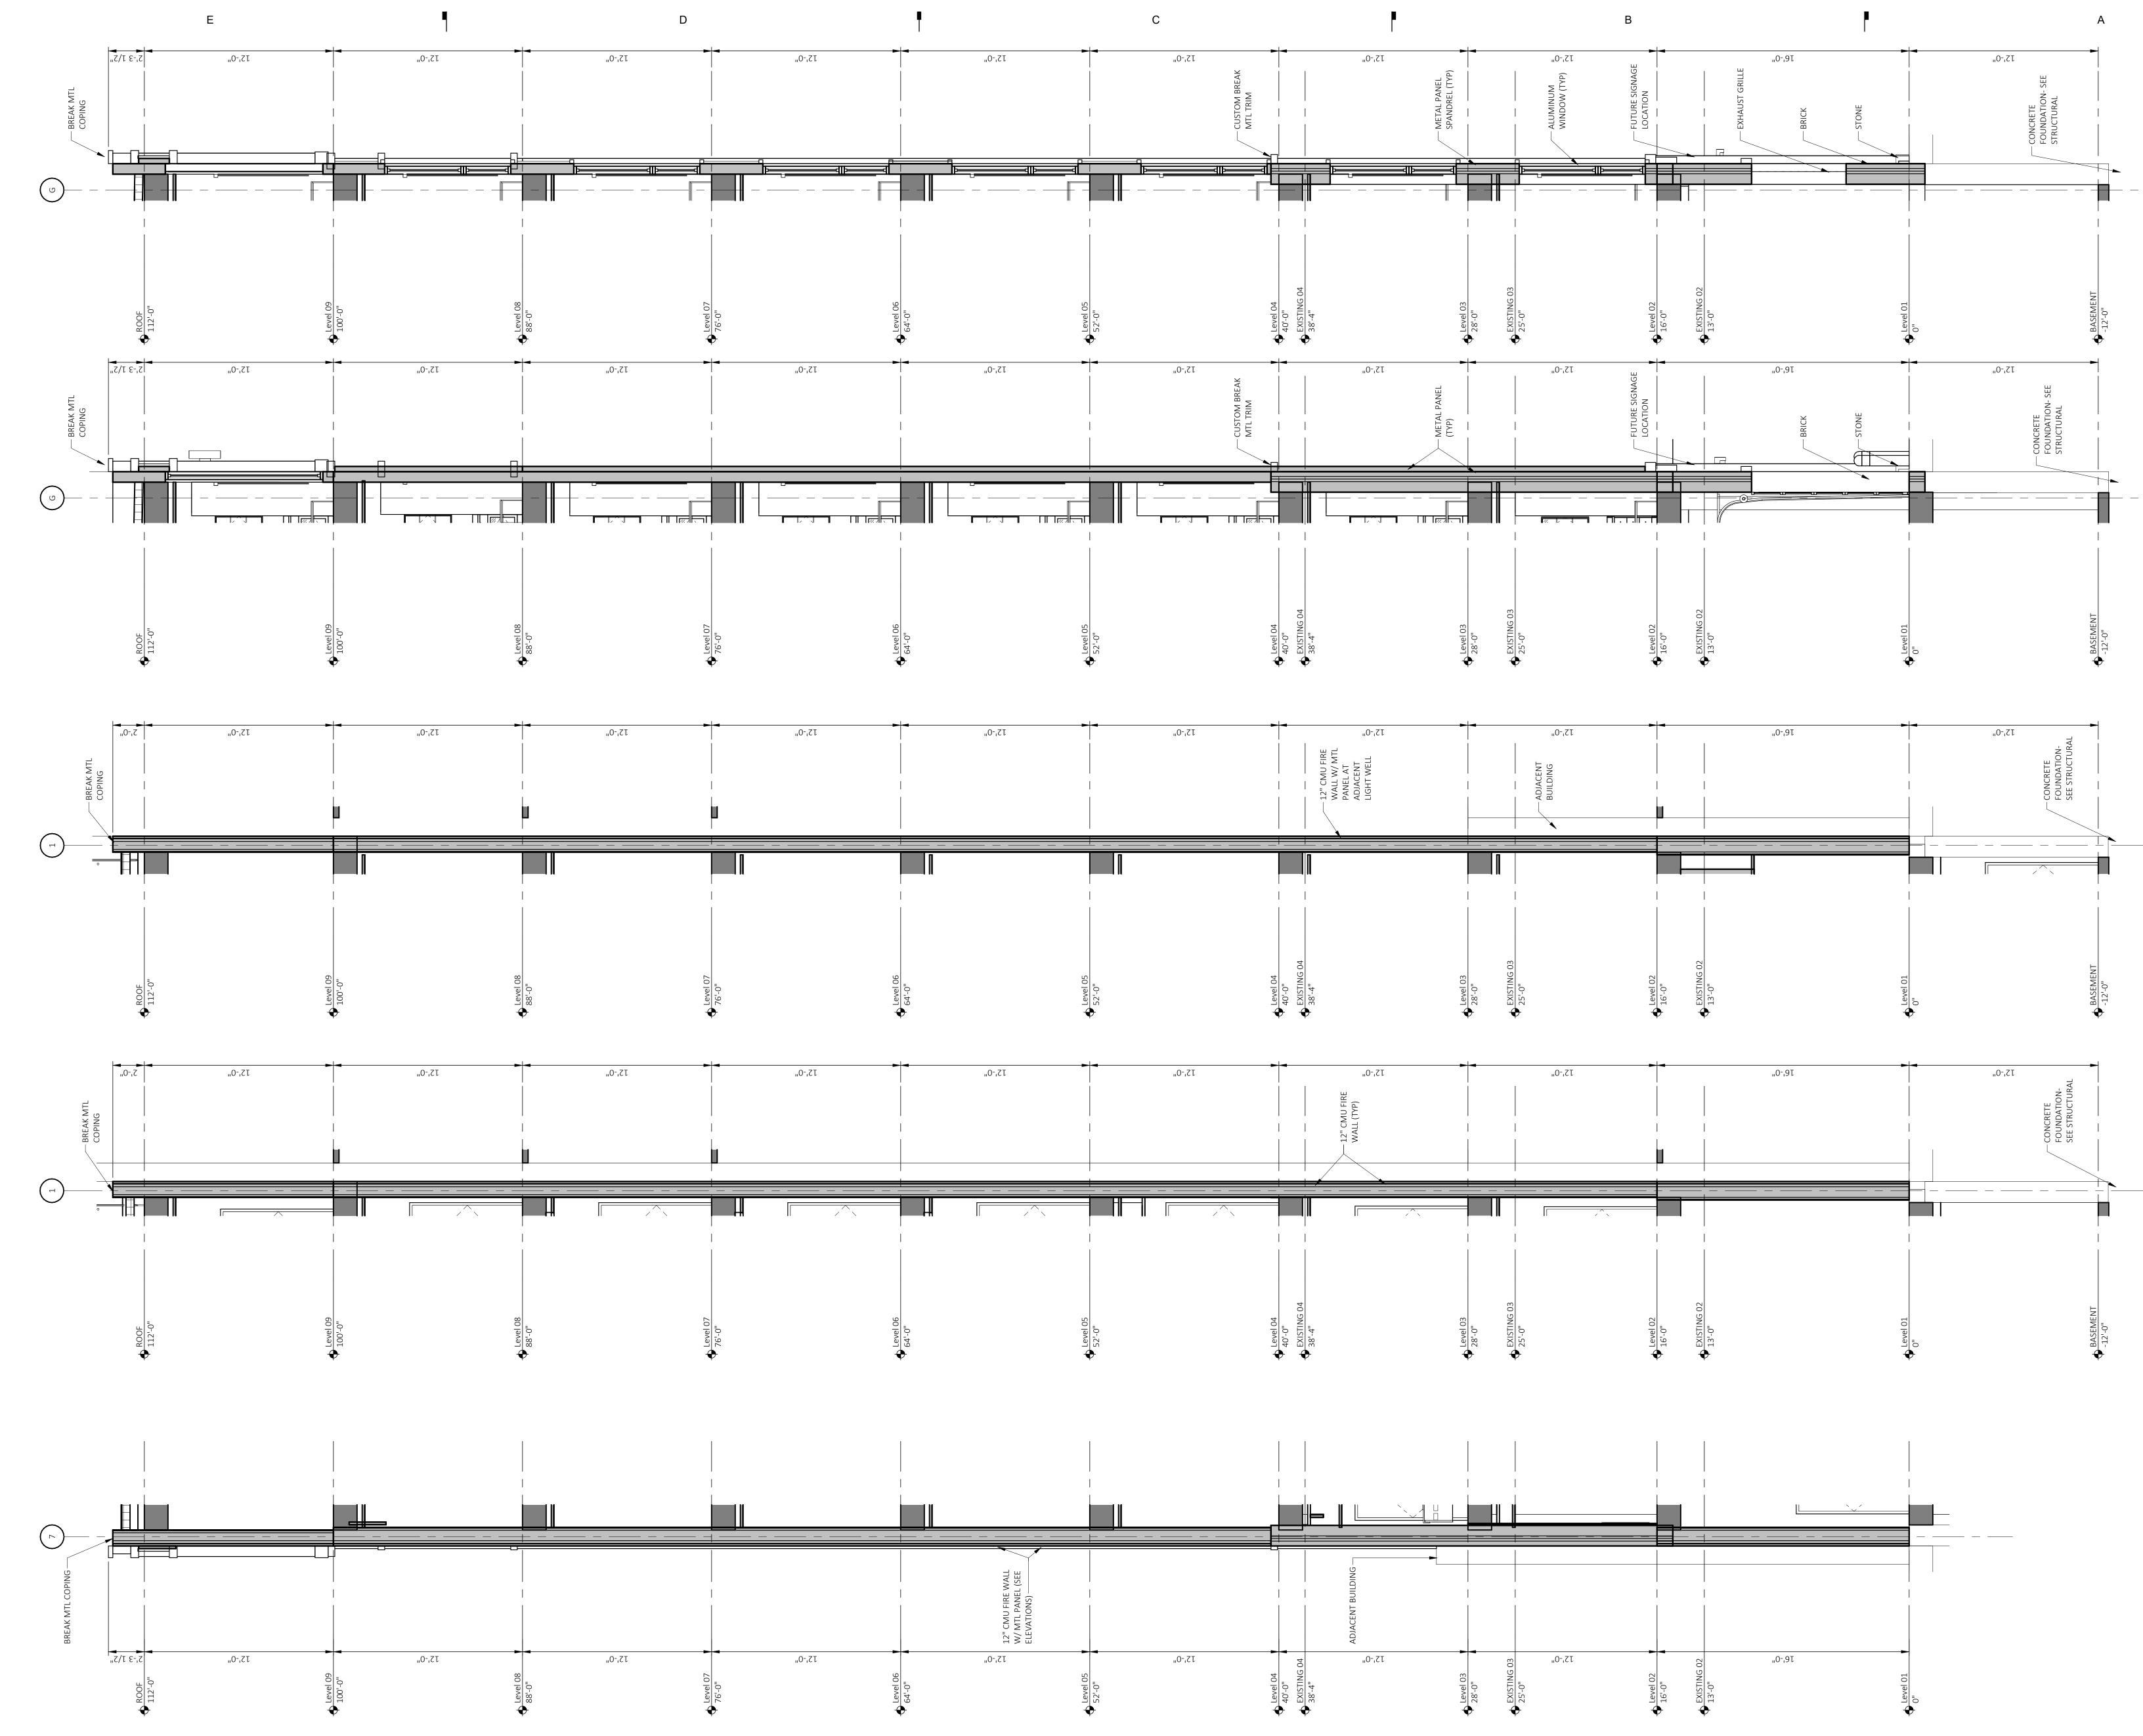

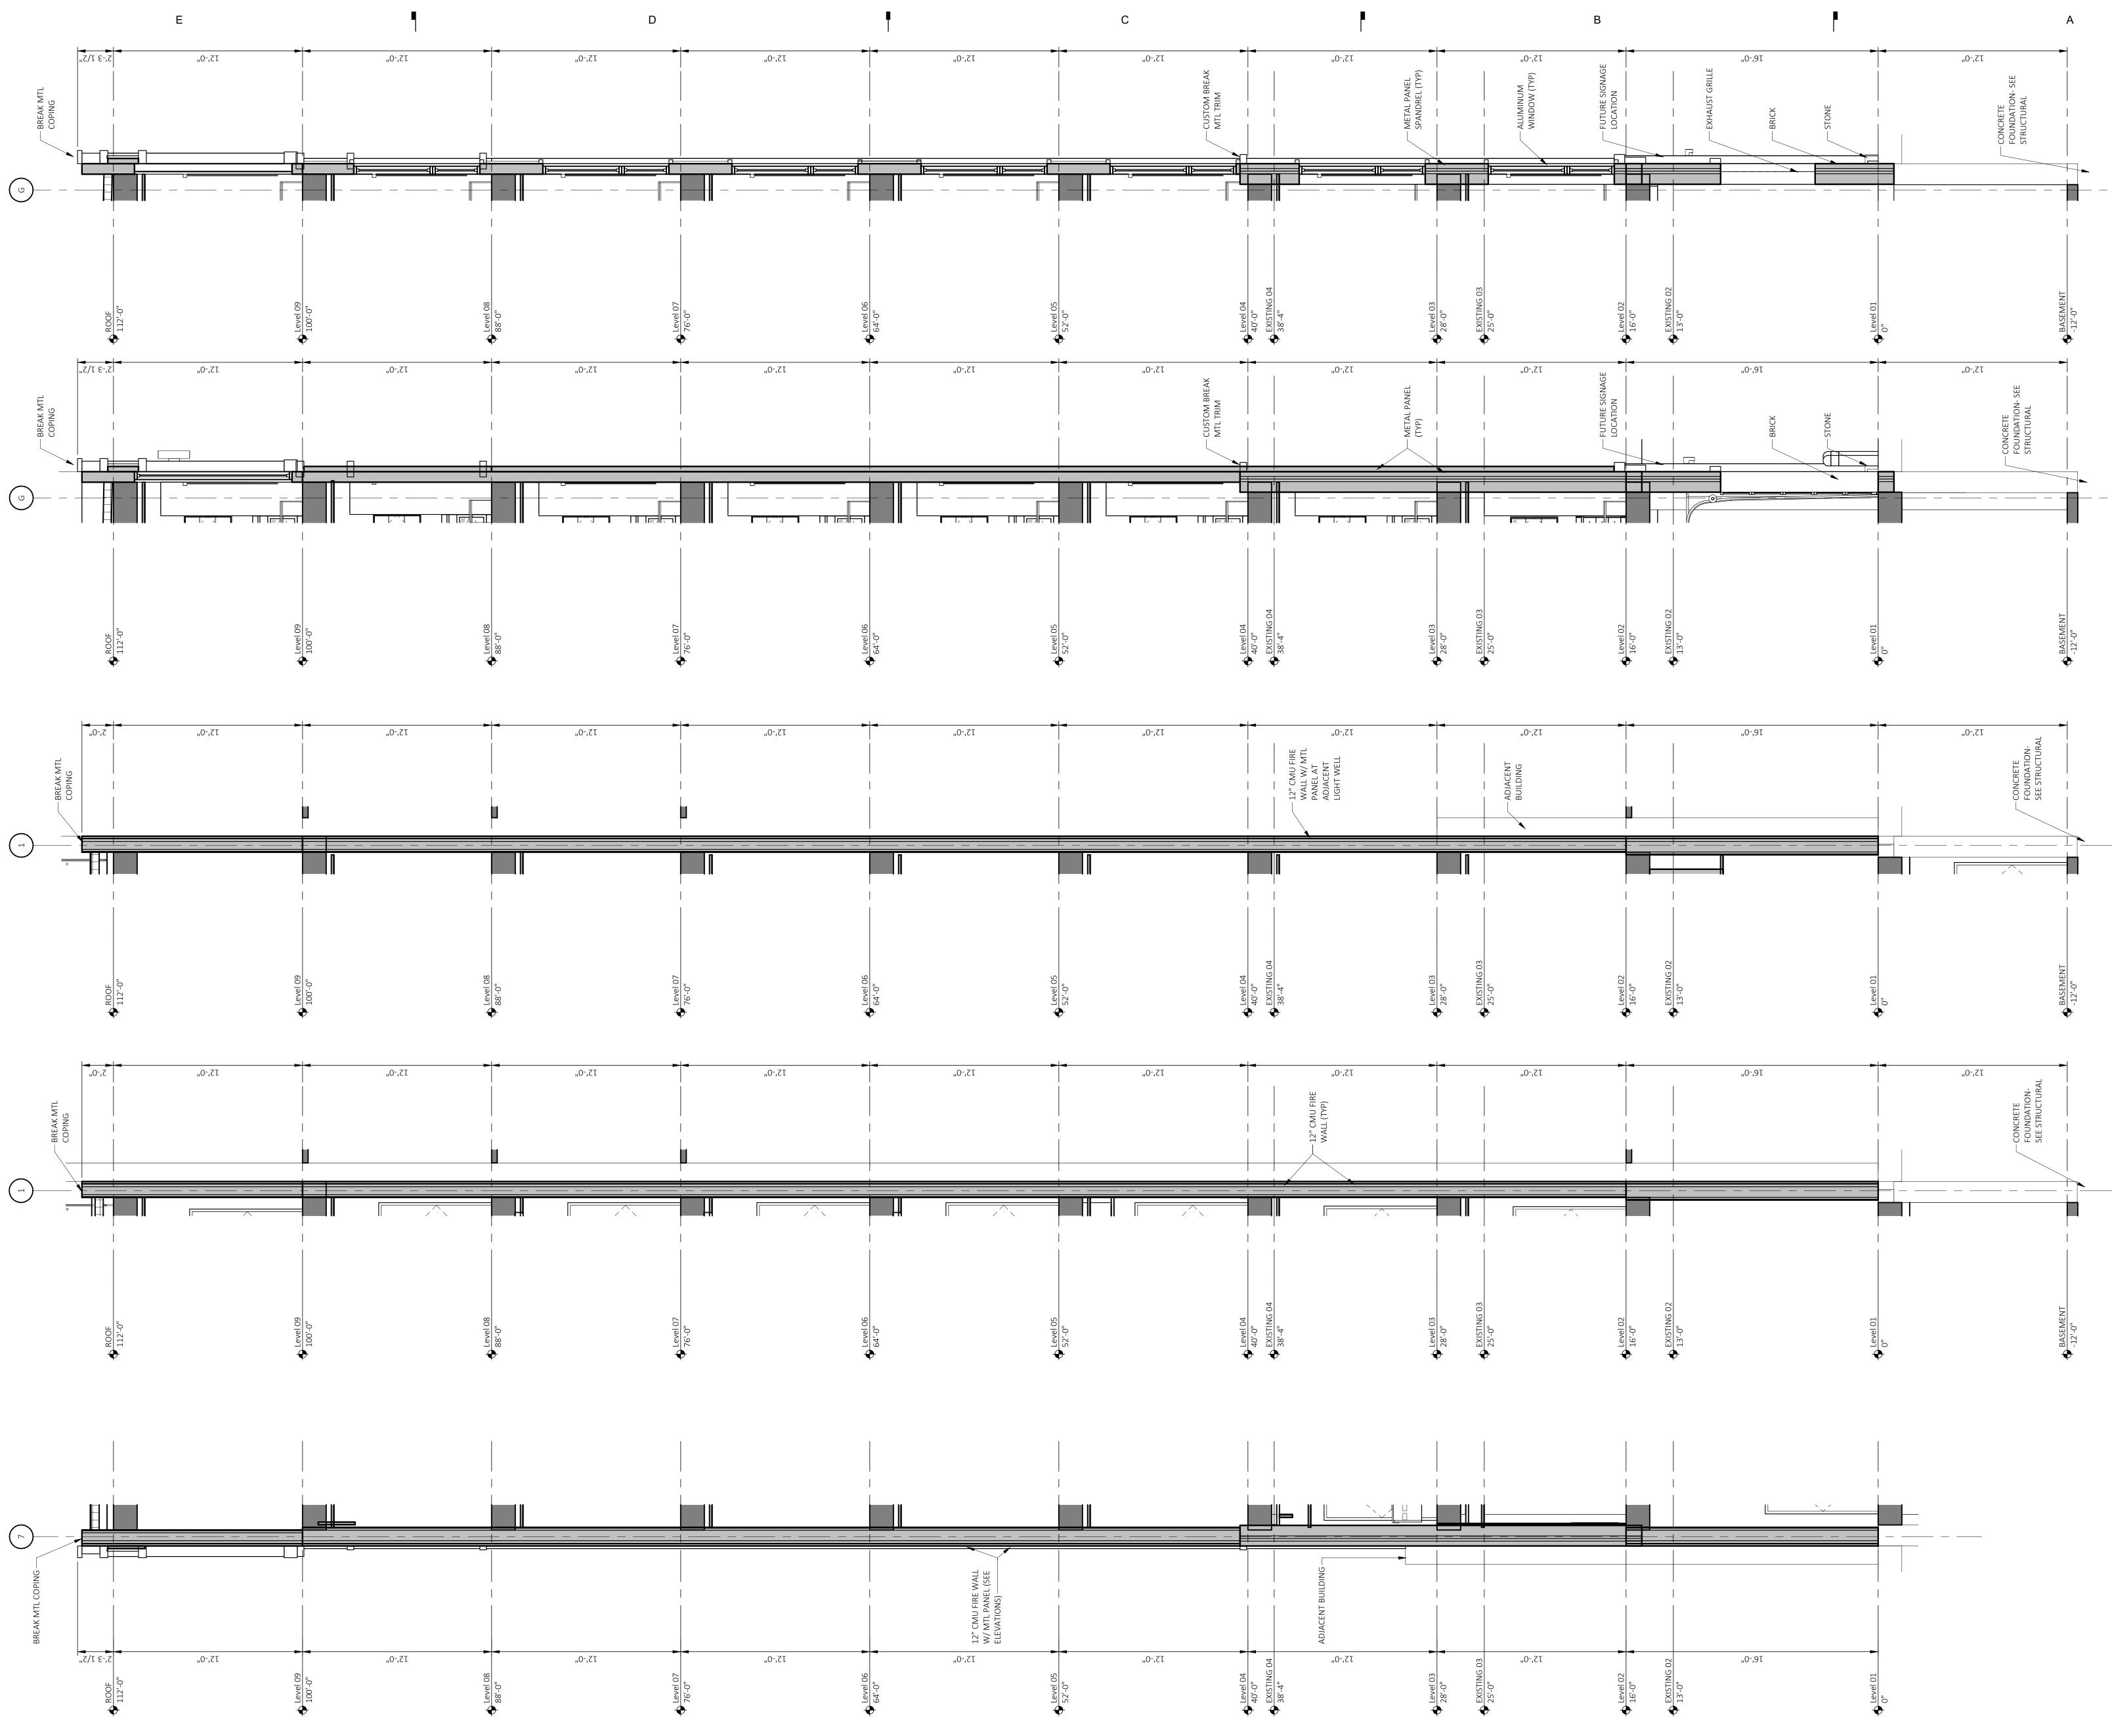

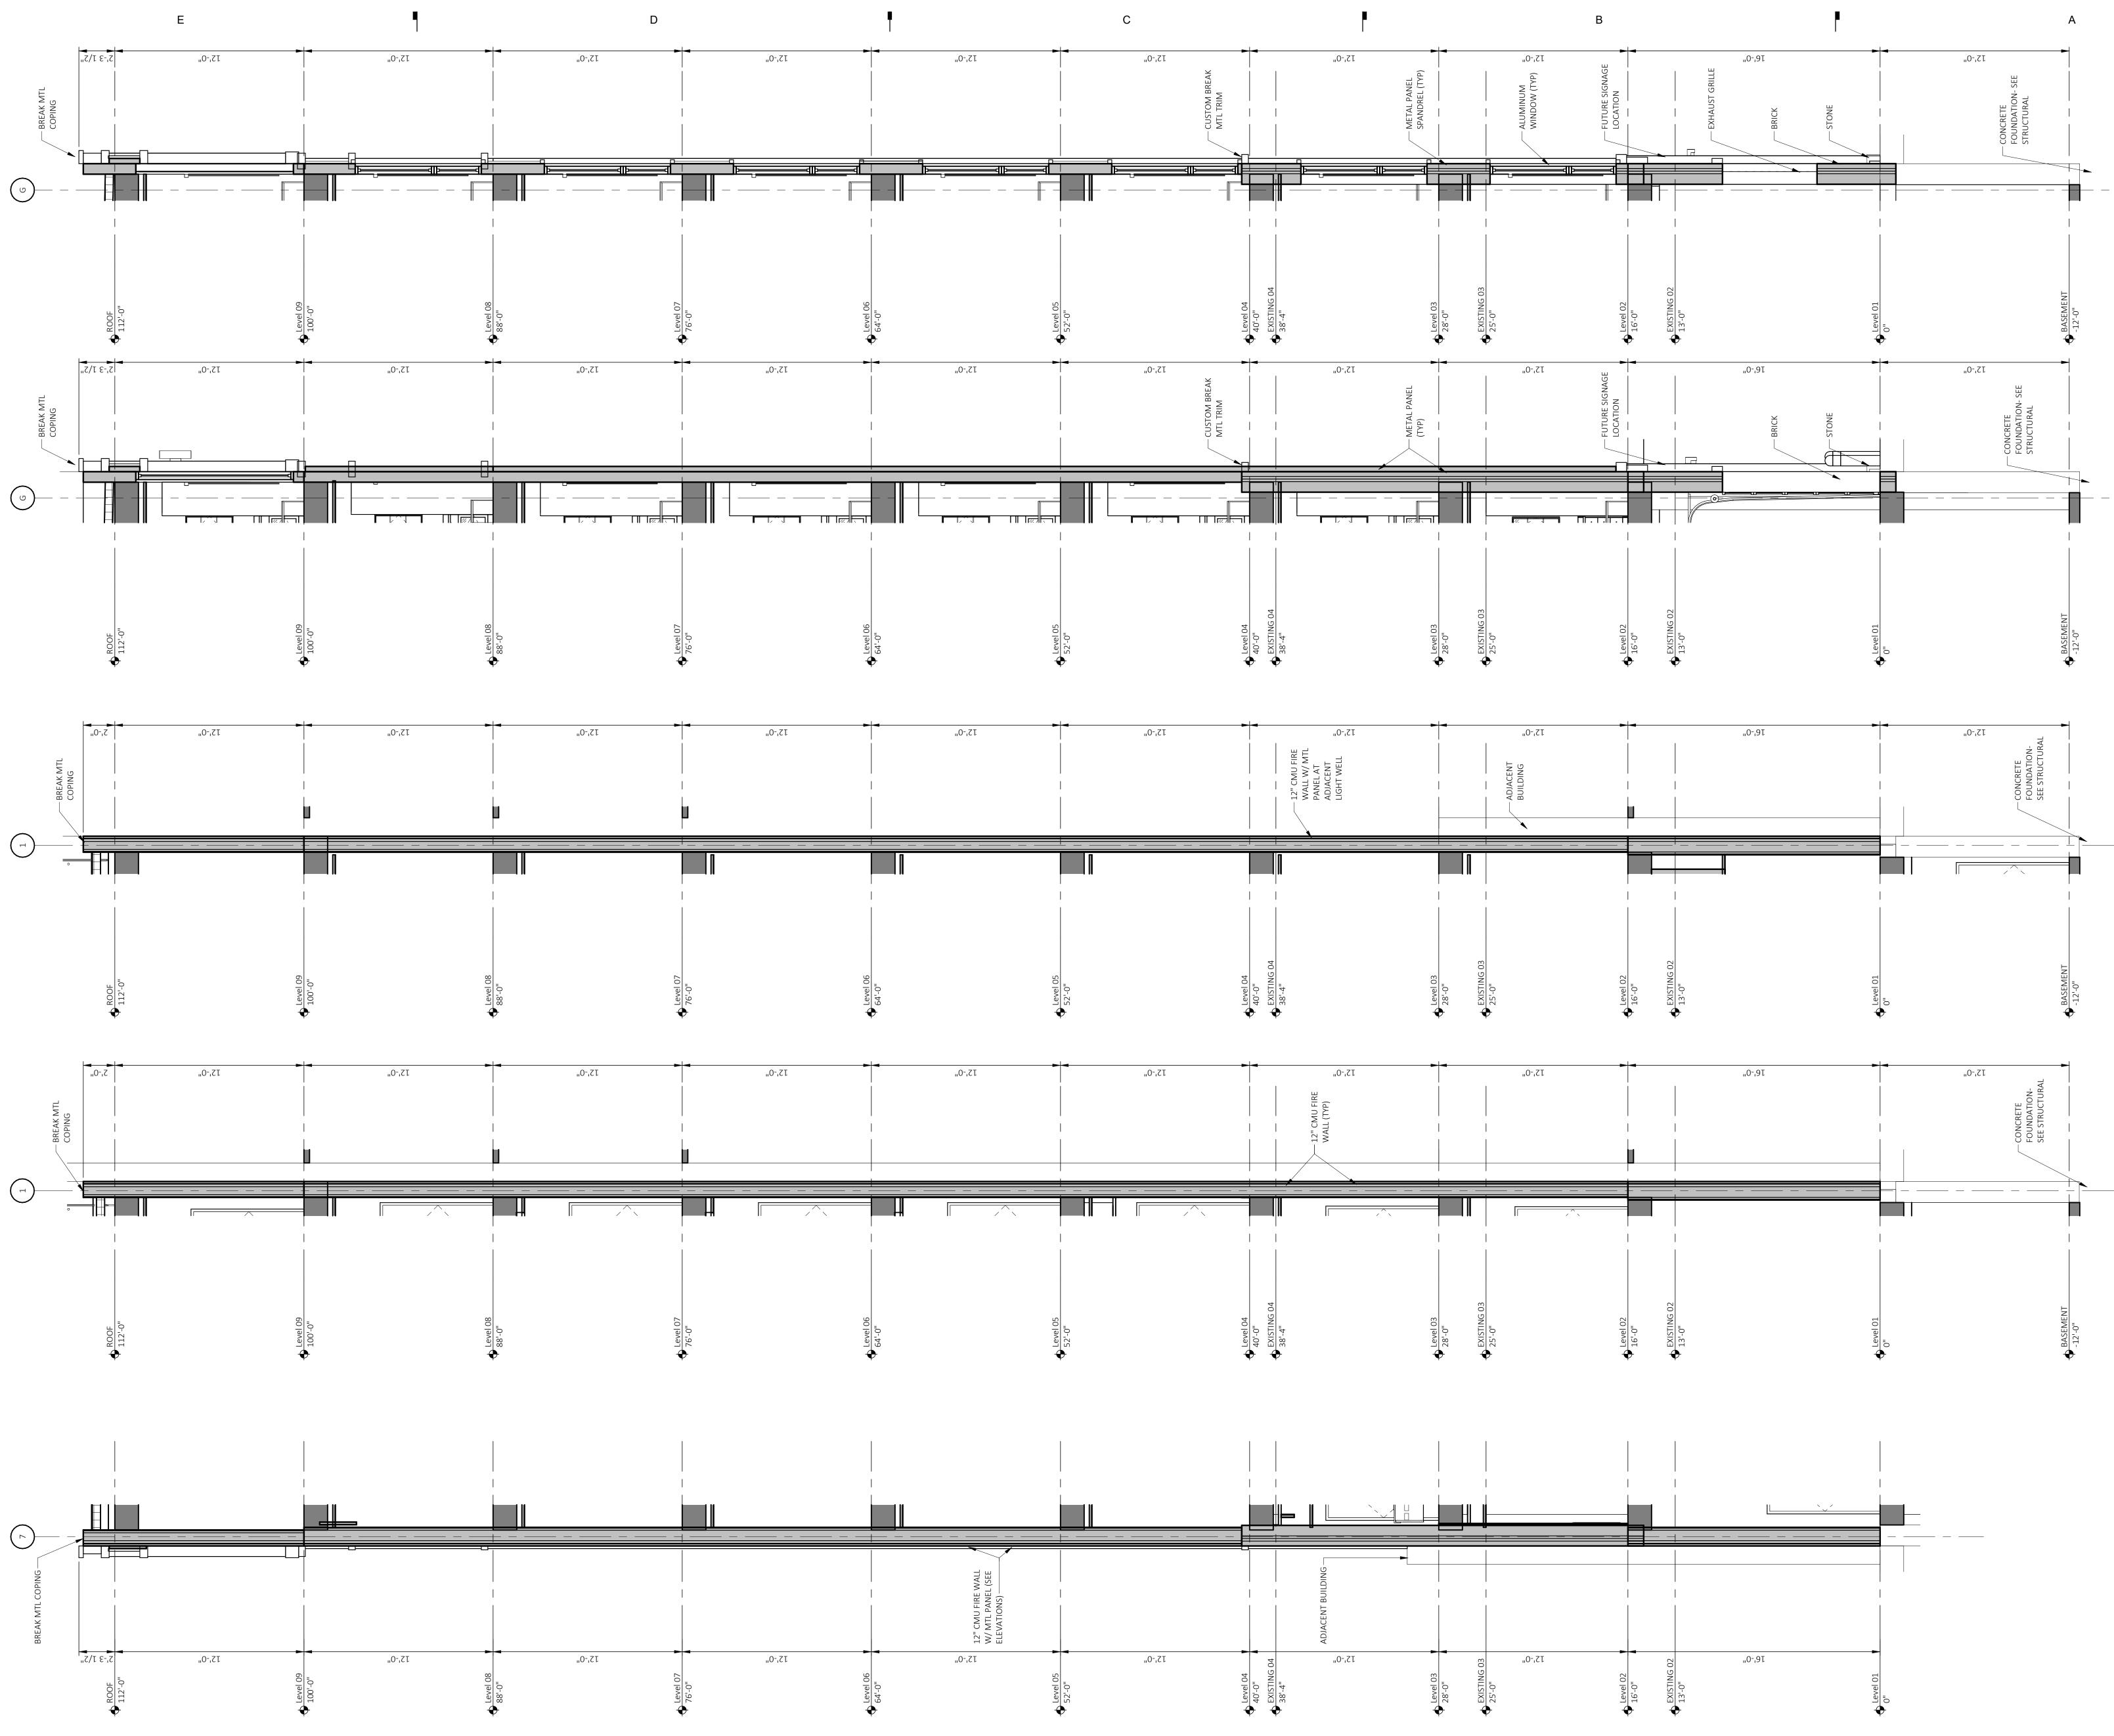

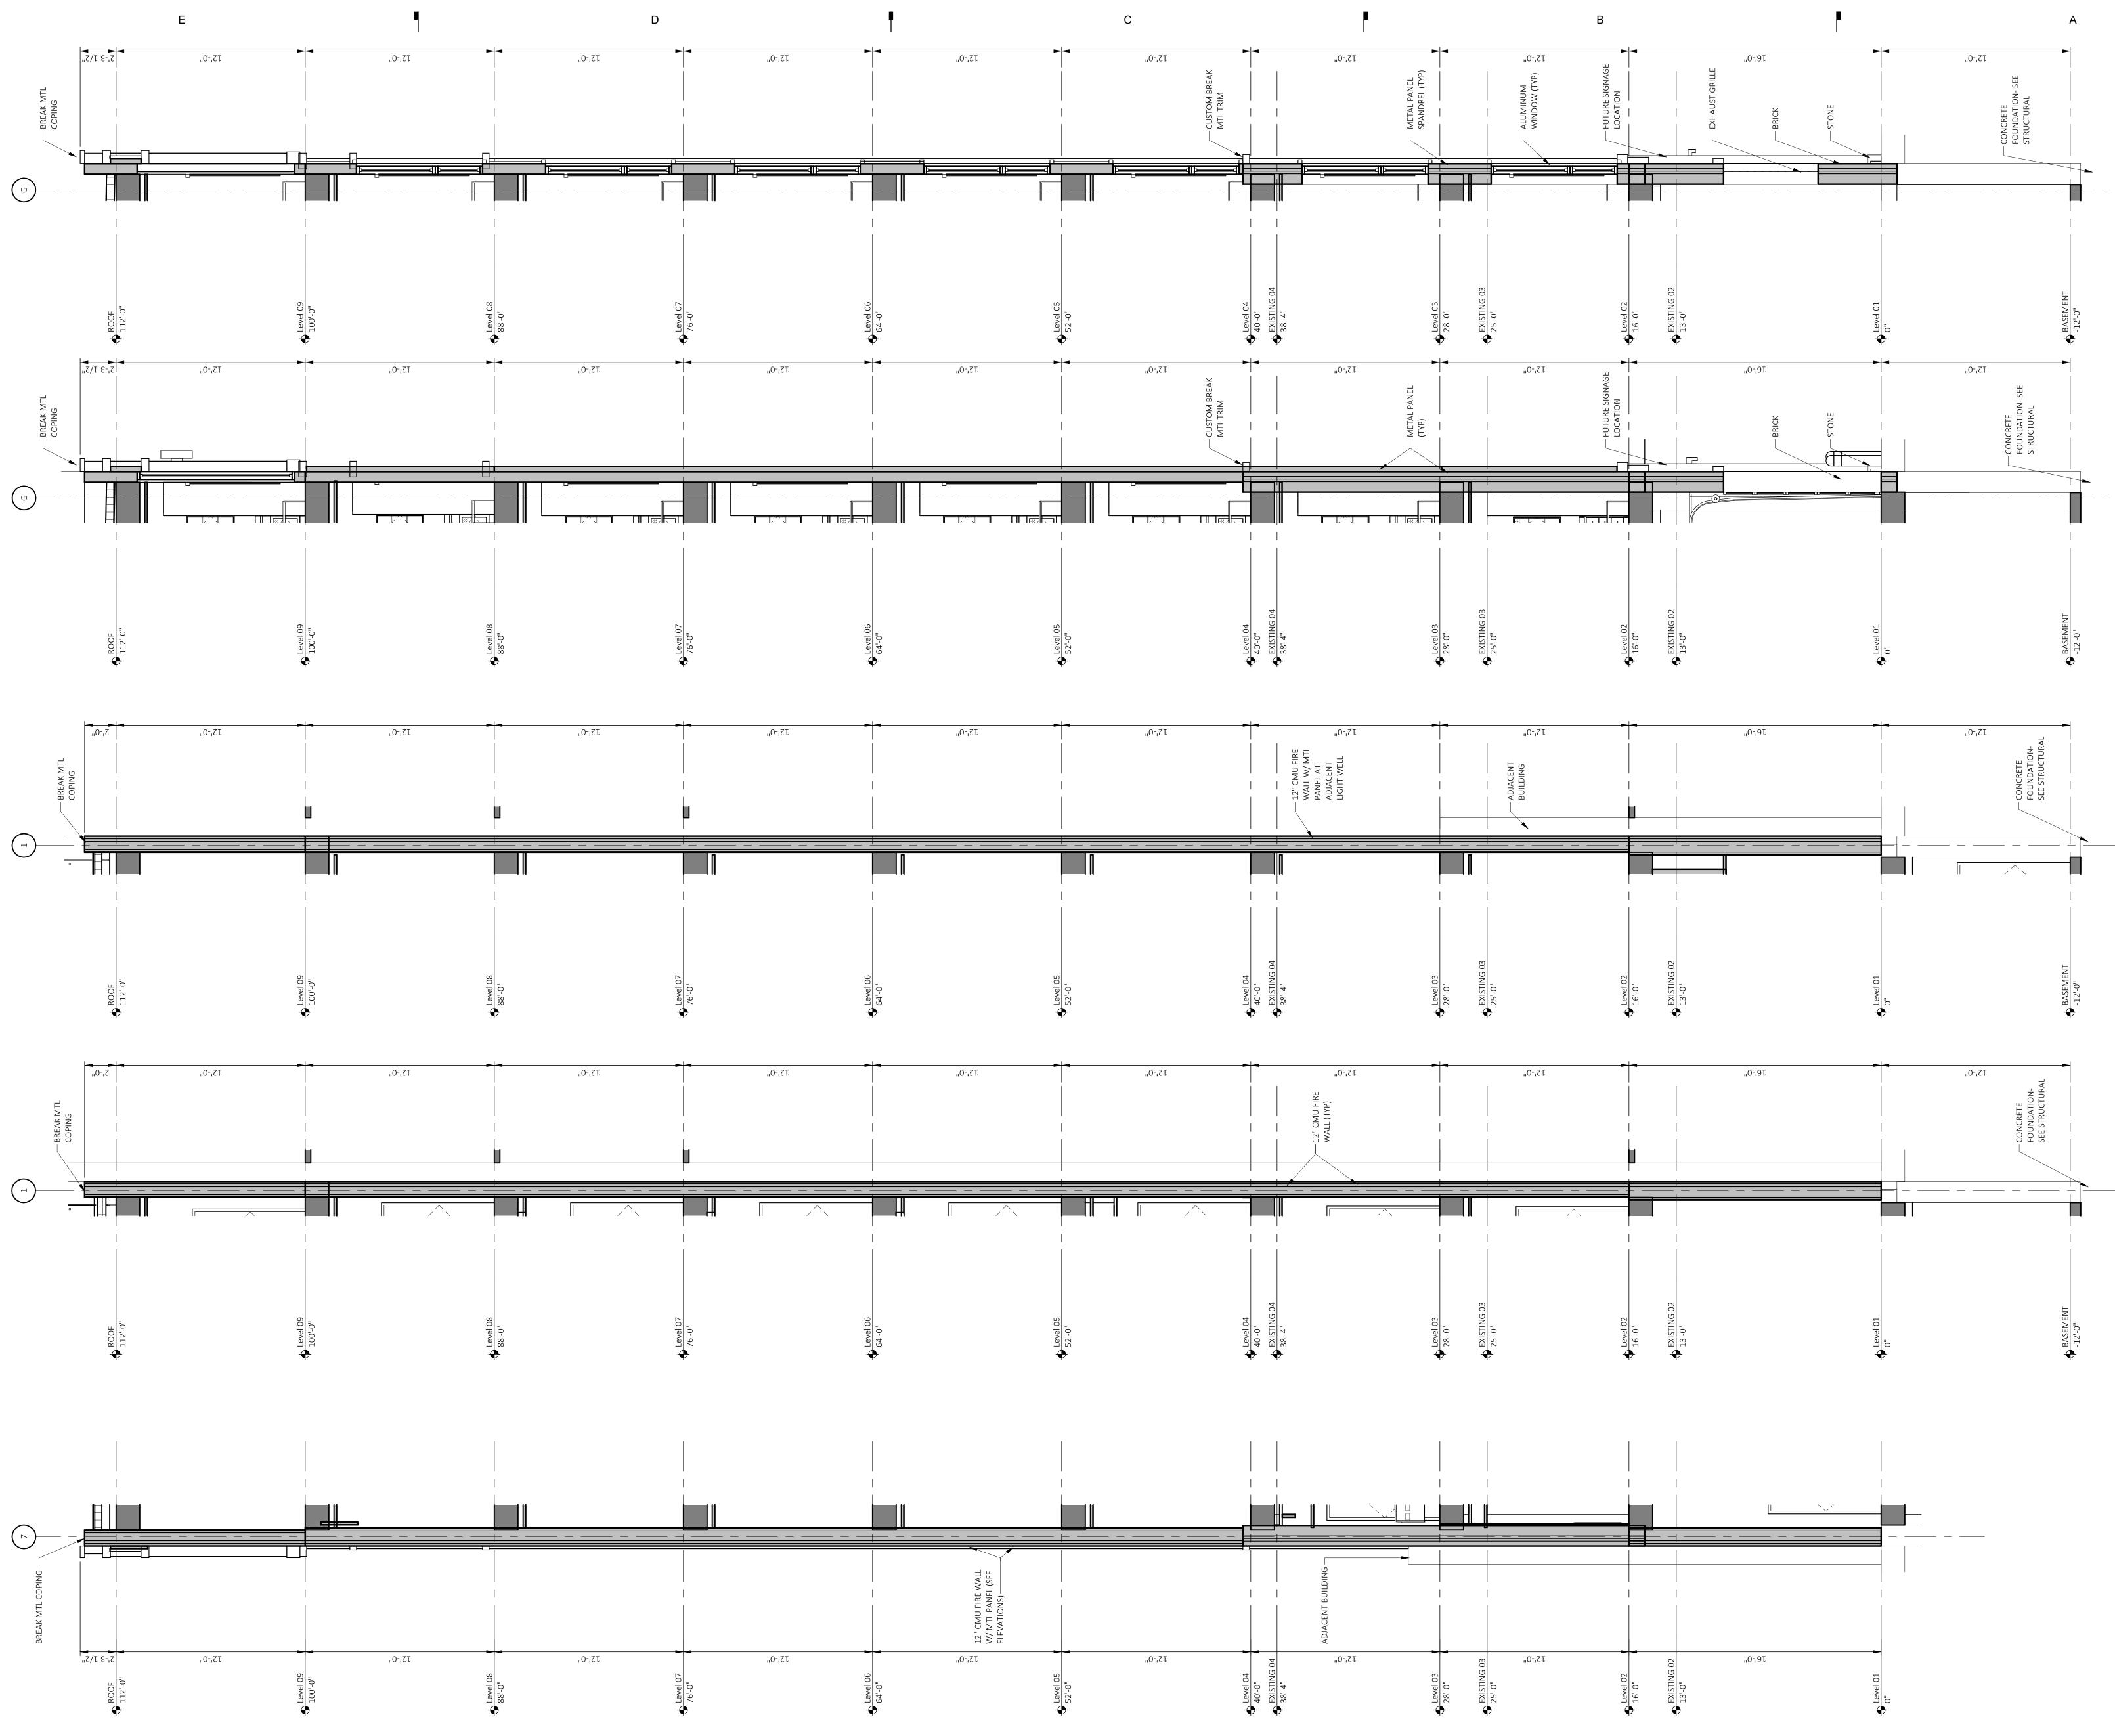










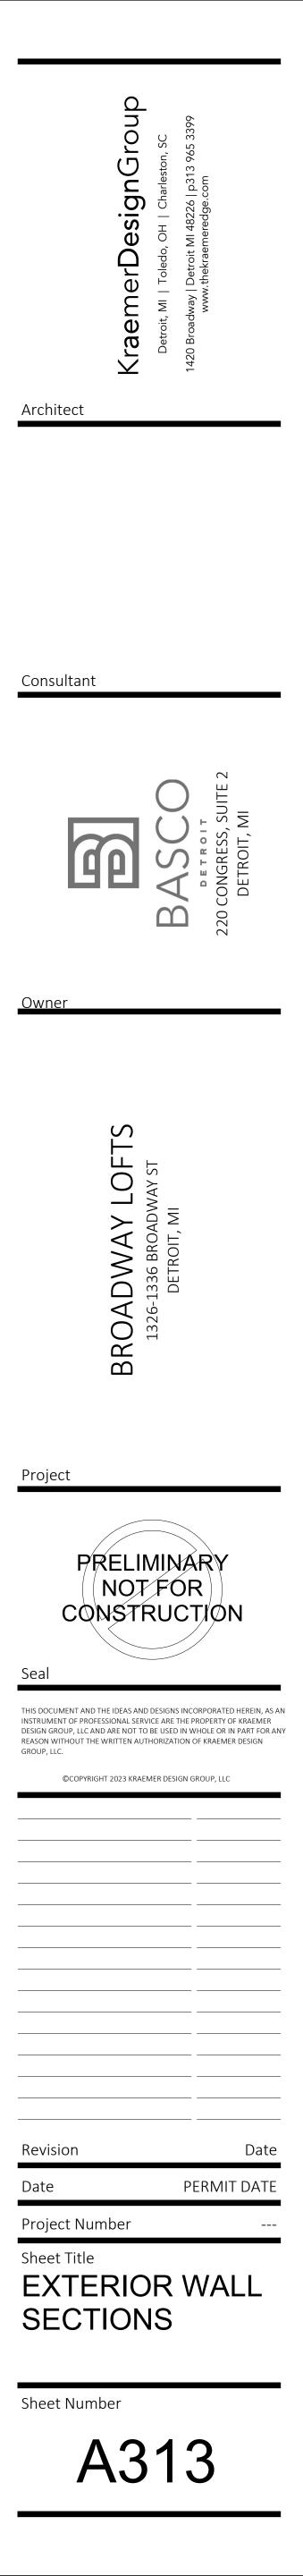

2


3

Е

٩


С

₽.

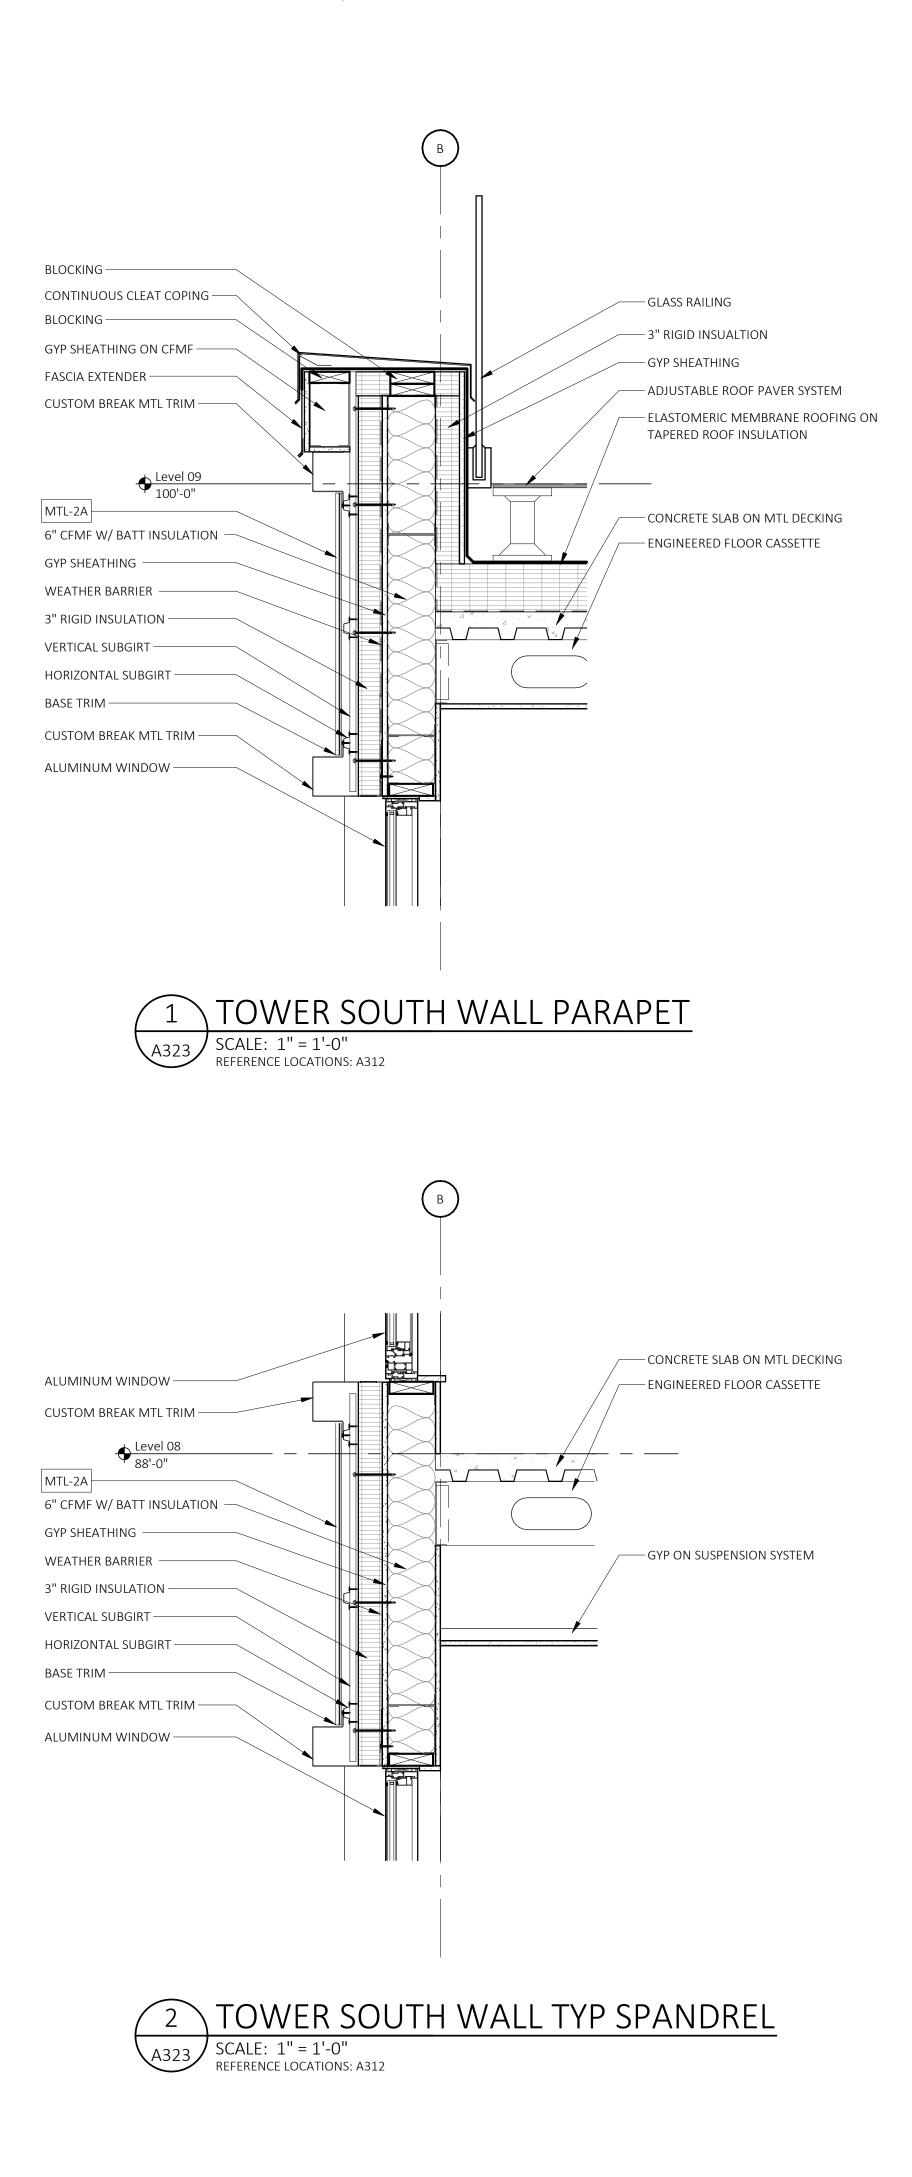

Α

KraemerDesignGroup         Detroit, MI   Toledo, OH   Charleston, SC         1420 Broadway   Detroit MI 48226   p313 965 3399         www.thekraemeredge.com
Architect
Consultant
Consultant
BASSO BETROIT, MI
Owner
BROADWAY LOFTS 1326-1336 BROADWAY ST DETROIT, MI
Project
PRELIMINARY           NOT FOR           NOT FOR           OUTONO
OWNER REVIEW 06-02-23
Revision Date
Date PERMIT DATE Project Number Sheet Title EXTERIOR PLAN/ WALL DETAILS
Sheet Number
A323

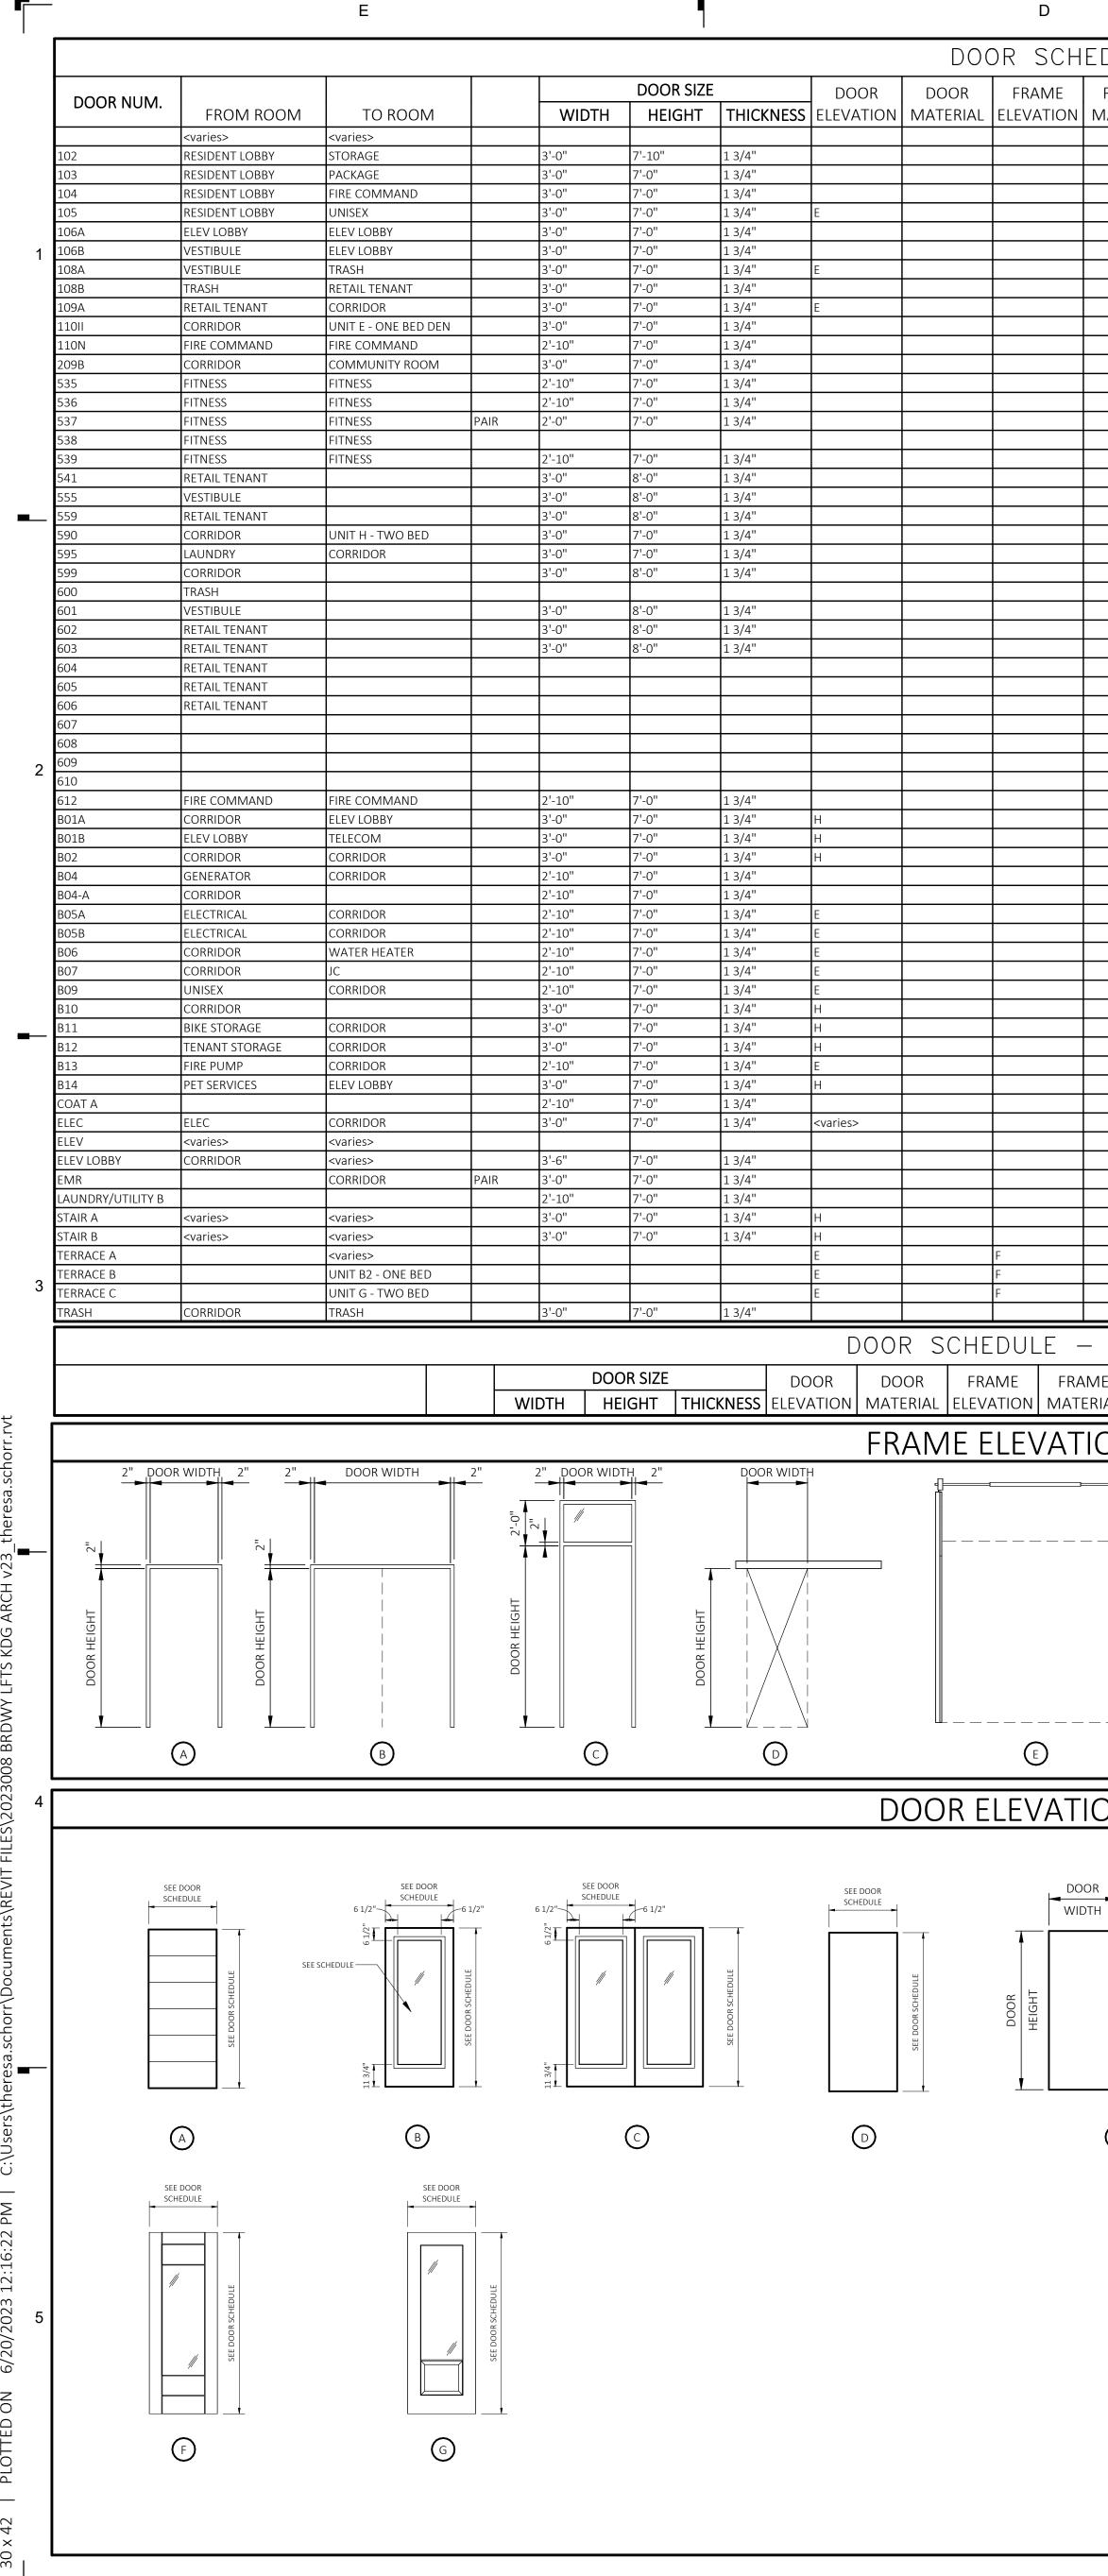

—


			<b>P</b>		C	P
EDULE frame material	SILL TYPE	GLASS TYPE	FIRE RATING	HARDWARE SET	REMARKS	SILL A
						3/4"
						THR-04 CA SCALE: 3" = 1'-0"
ME		ASS		OWARE SET	REMARKS	
IONS			OR WIDTH			
				DOOR HEIGHI		
				Y		
ONS		F				
DR TH		-			SEE DOOR SCHEDULE	
			IDTH - SAFETY GI SEE SCHEI	ASS, BONC		
		DOOR HEIGHT		ASS, ASS, ASS, CASS, CAS		
E		<u>+</u> (	F	<u> </u>		

AND THRESHOLD TYPES	GENERAL NOTES
DOOR FRAME BEYOND DOOR SLAB FINISHED FLOOR QTZ/STC-# THRESHOLD TO ALIGN W/ DOOR FRAME	<ul> <li>A DOOR SCHEDULE INDICATES NEW DOORS AND EXISTING DOORS REQUIRING MODIFICATION. CONTRACTOR SHALL COORDINATE THE KEYING OF NEW, REWORKED, AND EXISTING DOOR WITH OWNER'S REQUIREMENTS. ADDITIONAL DOORS DISCOVERED TO REQUIRE MODIFICATION SHALL BE PROMPTLY REPORTED TO ARCHITECT.</li> <li>B LOCATE DOOR FRAMES A MINIMUM OF 6" FROM INSIDE CORNER TO DOOR OPENING UNLESS OTHERWISE INDICATED.</li> <li>C UNDERCUT DOORS AS REQUIRED TO CLEAR FINISH FLOOR MATERIALS AND TO MAINTAIN FIRE RATING.</li> <li>D DOORS SHALL BE SINGLE SWING. (UNLESS OTHERWISE NOTED)</li> <li>E ETR = EXISTING TO REMAIN</li> <li>F SEE ROOM FINISH SCHEDULE FOR FIELD PAINTED/STAINED FINISHES, SEE SPECIFICATIONS FOR FACTORY FINISHES</li> <li>G IN NON-SPRINKLED BUILDINGS, WHERE DOOR SCHEDULE INDICATES RATED DOOR, PROVIDE FIRE-RATED DOOR THAT ALLOWS HEAT TRANSMITTED TO UNEXPOSED SIDE TO EXCEED 650 DEGREES WHERE ASSEMBLY IS NOT ASSOCIATED WITH EXITS AND MEANS OF EGRESS E.G. CORRIDORS, STORAGE, AND BOILER ROOMS. PROVIDE TEMPERATURE-RATED DOORS THAT LIMIT HEAT TRANSMITTED TO 450 DEGREES IN MEANS OF EGRESS INSTALLATIONS E.G. A STAIR DOOR.</li> <li>H PRE-HUNG WOOD DOOR FRAMES: SET PRE-HUNG WOOD DOOR FRAMES LEVEL AND SQUARE WITHIN DESIGNATION PARTITION. MAKE SPACING BETWEEN JAMBS AND DOOR CONSISTENT ON ALL SIDES. SET FRAME AND HINGES TO ALLOW SUFFICIENT HEIGHT FOR DESIGNATED FLOOR FINISH. MAKE DOOR JAMBS FLUSH WITH FINISHED WALL SURFACES ON BOTH SIDES OF PARTITION. IDEALLY PROJECT BEYOND FINISHED WALL SURFACE BY ABOUT 1/32 OF AN INCH. APPLY SPECIFIED WOOD CASING, COUNTER SINK WITH FASTENERS (INALS) CONCEALED. SECURELY FASTEN PRE-HUNG FRAME TO WALL FRAMING TO AVOID VIBRATION. PROVIDE SHIMS AT EACH HINGE LOCATION. SPACING OF SHIMS NOT TO EXCEED 24 INCHES.</li> </ul>
	REMARKS
	1 ADD NOTES HERE INSERTS DATA ROWS TO ADD MORE NOTES
	DOOR MATERIAL LEGEND
	DOCONTINIATELIMAL ELECTIND         WOOD DOORS         CP MD COMPOSITE MOLDED         MD SR       MD FS TILE AND RAIL         WD FY       WOOD FLUSH         PLFS       PLASTIC LAMINATE FLUSH SMOOTH         PL FR       PLASTIC FIBER REINFORCED         STPF         STEEL PRE-FINISHED         STFF         STEEL COMATIVE FLUSH SMOOTH         STFF         STEEL COLORATIVE FLUSH SMOOTH         STFF         STEEL COCORATIVE FLUSH SMOOTH         STAC         STEEL DECORATIVE FLUSH EMBOSSED         STAC         STEEL DECORATIVE FLUSH EMBOSSED         STAC         STAINLESS STEEL DECORATIVE         ALCOUSTIC         STAC         STAINLESS STEEL DECORATIVE
	GLASS TYPES
	IG-1 INSULATED GLASS IG-3 INSULATED SAFETY GLASS CSG FIRELIGHT NT RCG PYROSTOP FRG FIRE-RATED TEMPERED GLASS FG-1 MONOLITHIC SAFETY GLASS SEE SPECIFICATIONS

В

А



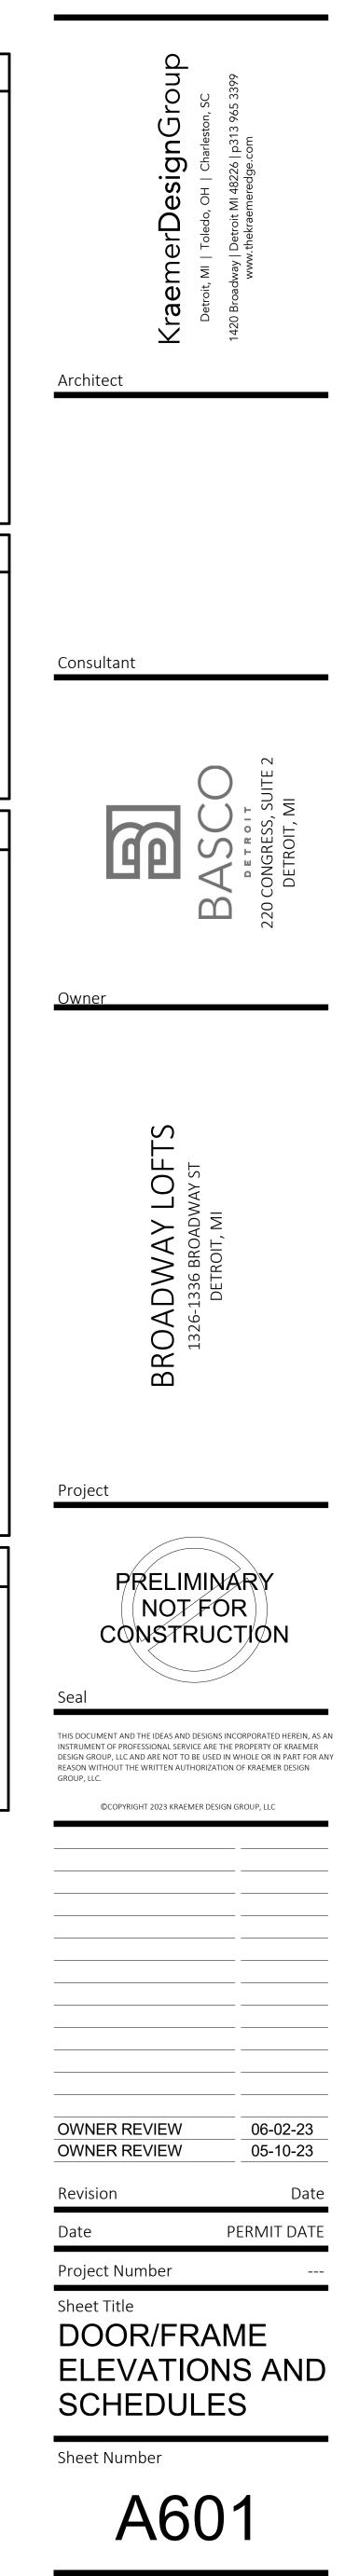


D

A600 - WINDOW SCHEDULE									
			FR/	<b>AME</b>	SASH				
TYPE	HEIGHT	WIDTH	MATERIAL	FINISH	MATERIAL	FINISH	GLASS	REMARKS	
A1	5'-0"	4'-10"							
B1	3'-0"	4'-10"	AL	BRONZE			IG-1		
C1	8'-0"	3'-10 171/256"	AL	BRONZE			IG-1		
C2	8'-0"	4'-0"	AL	BRONZE			IG-1		
С3	8'-0"	4'-10"	AL	BRONZE			IG-1		
D1	10'-0"	4'-4 1/2"	AL	BRONZE			IG-1		
D2	10'-0"	4'-10"	AL	BRONZE			IG-1		
E1	6'-6"	3'-4 1/4"	AL				IG-1		
F1	7'-4"	3'-9"	AL				IG-1		
F2	7'-4"	5'-3"	AL				IG-1		

3


1

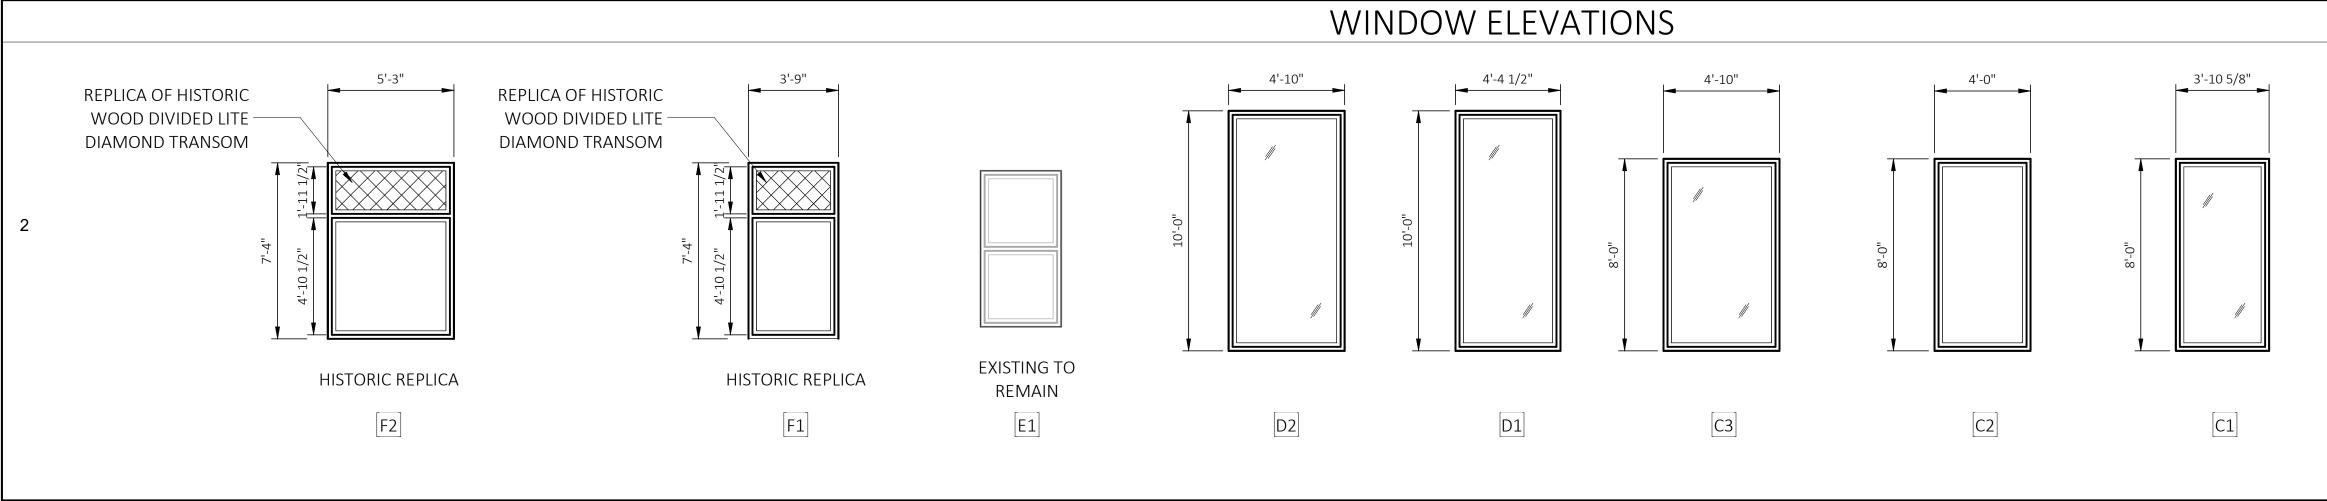


5

# WINDOW DETAILS

С

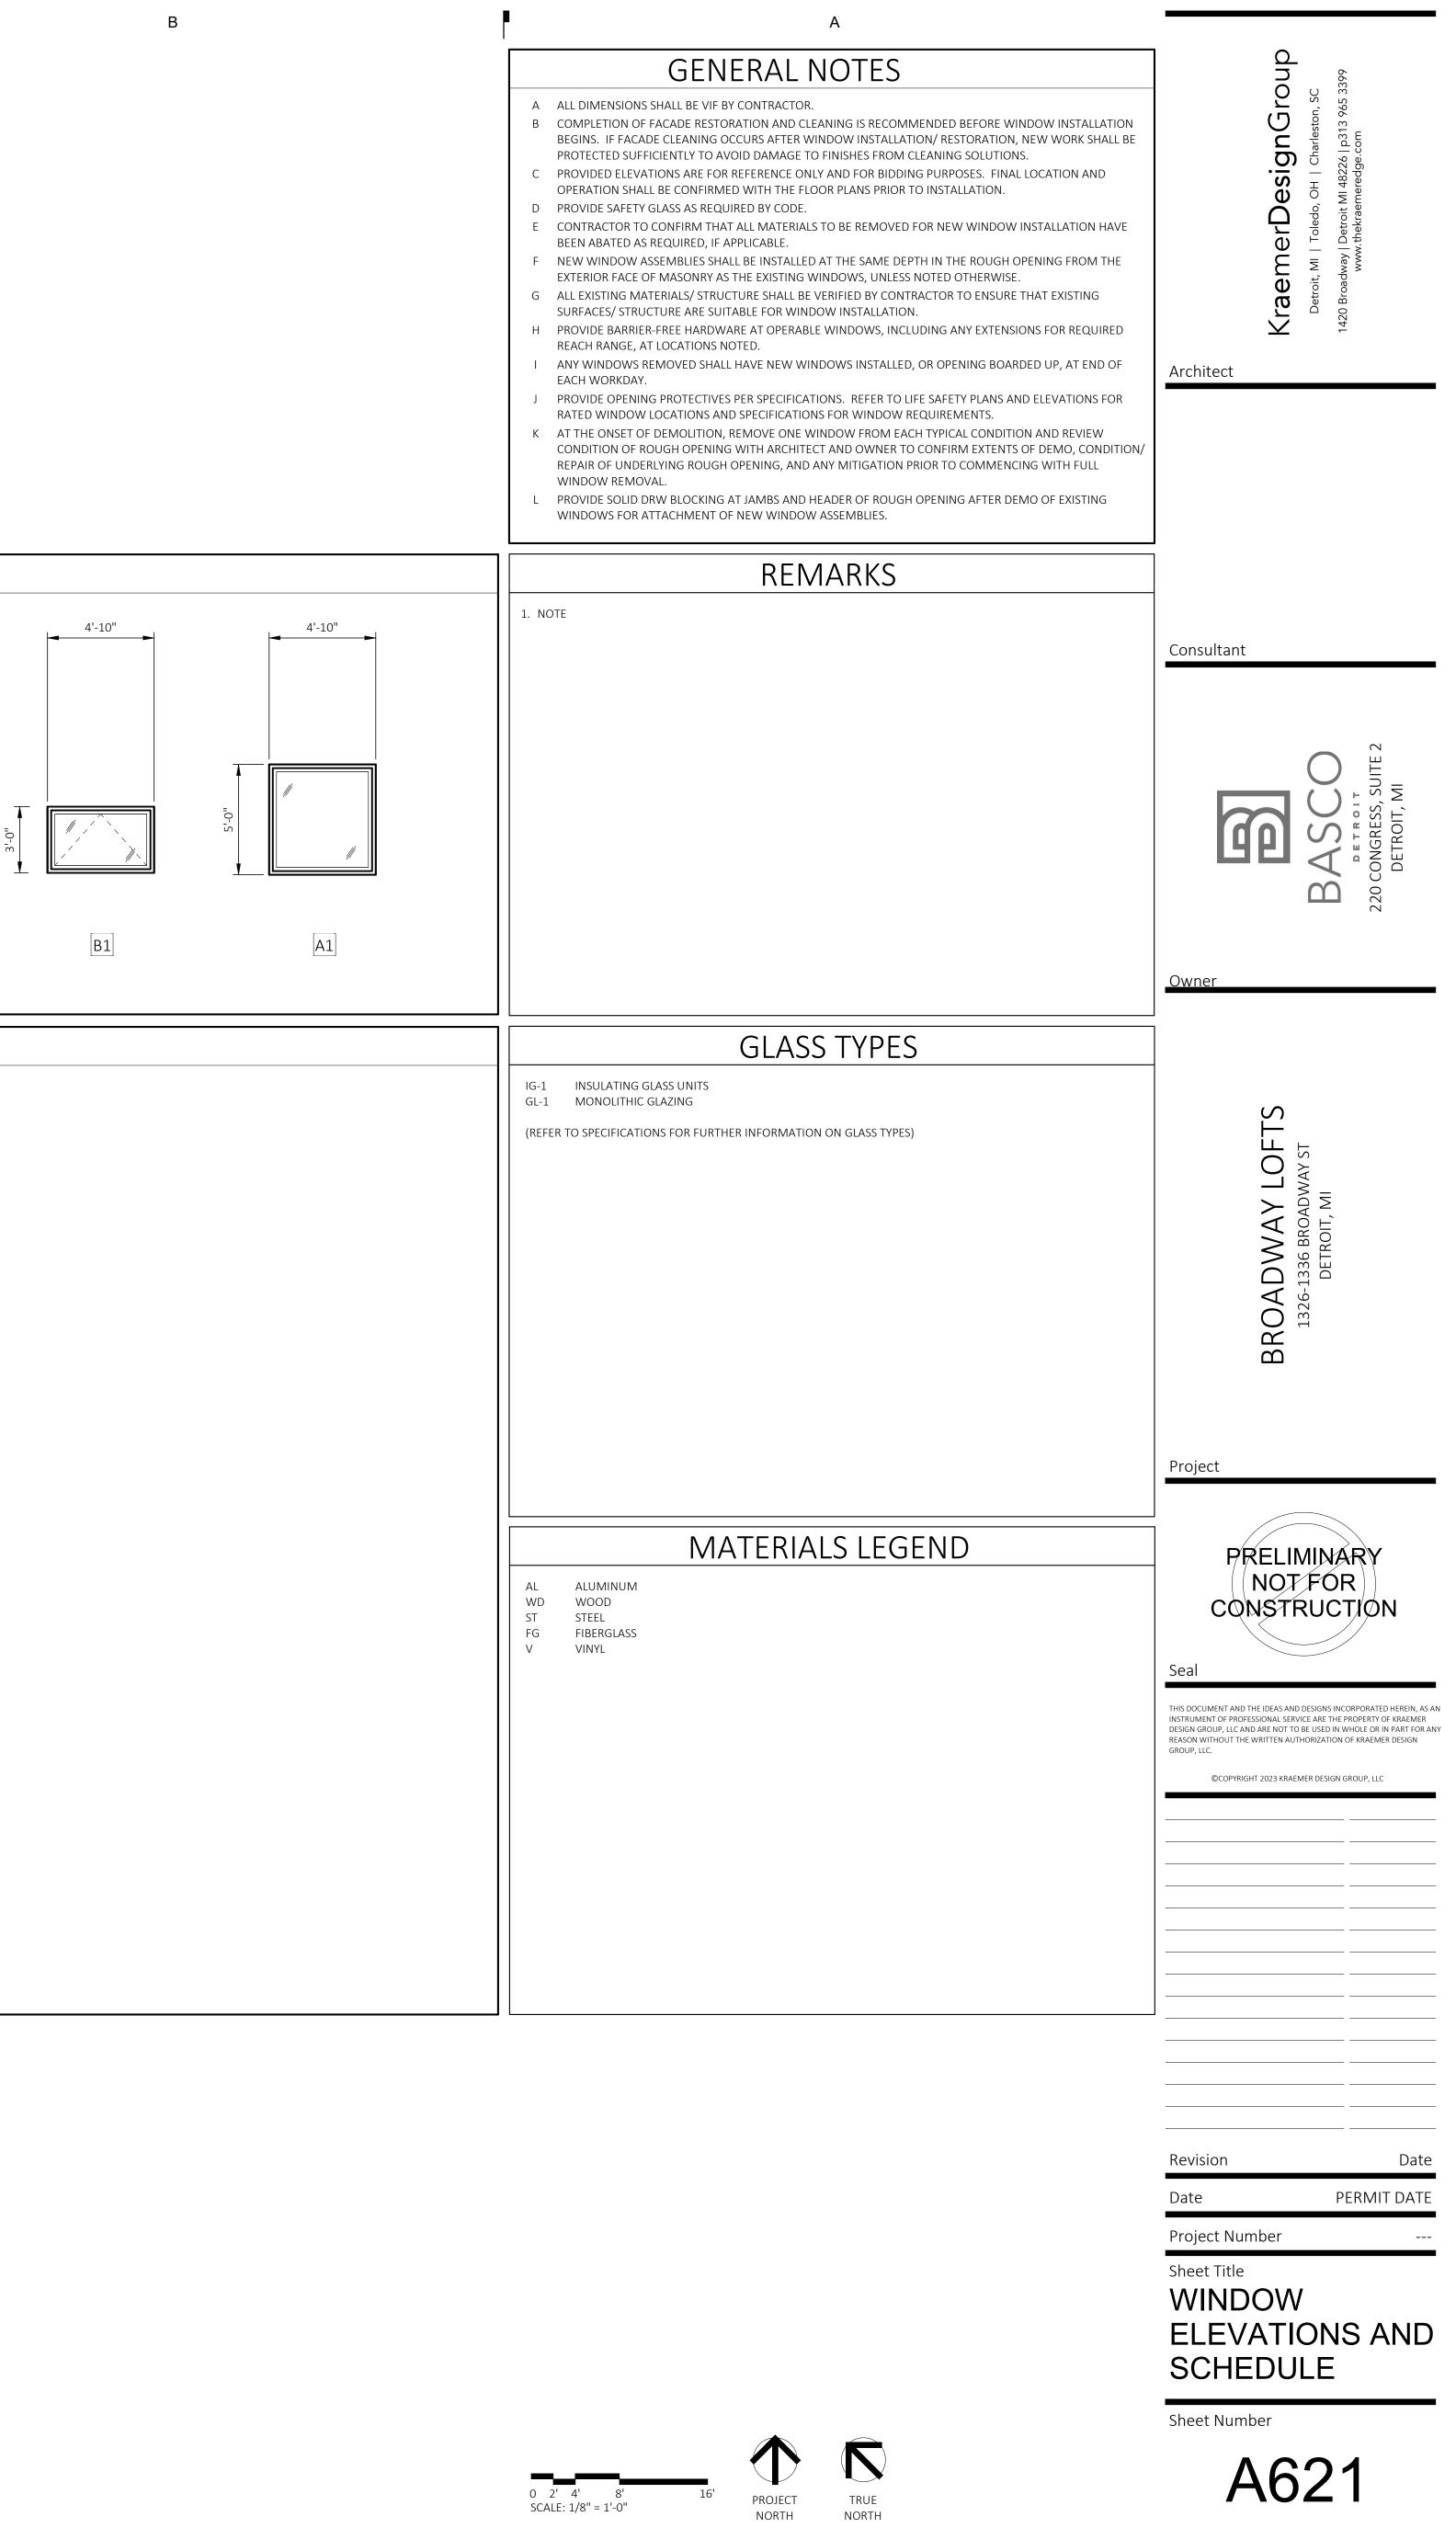








2

3

Е

•








В


P


А

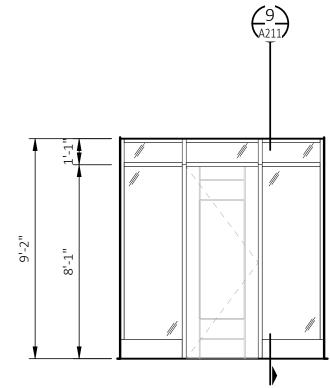


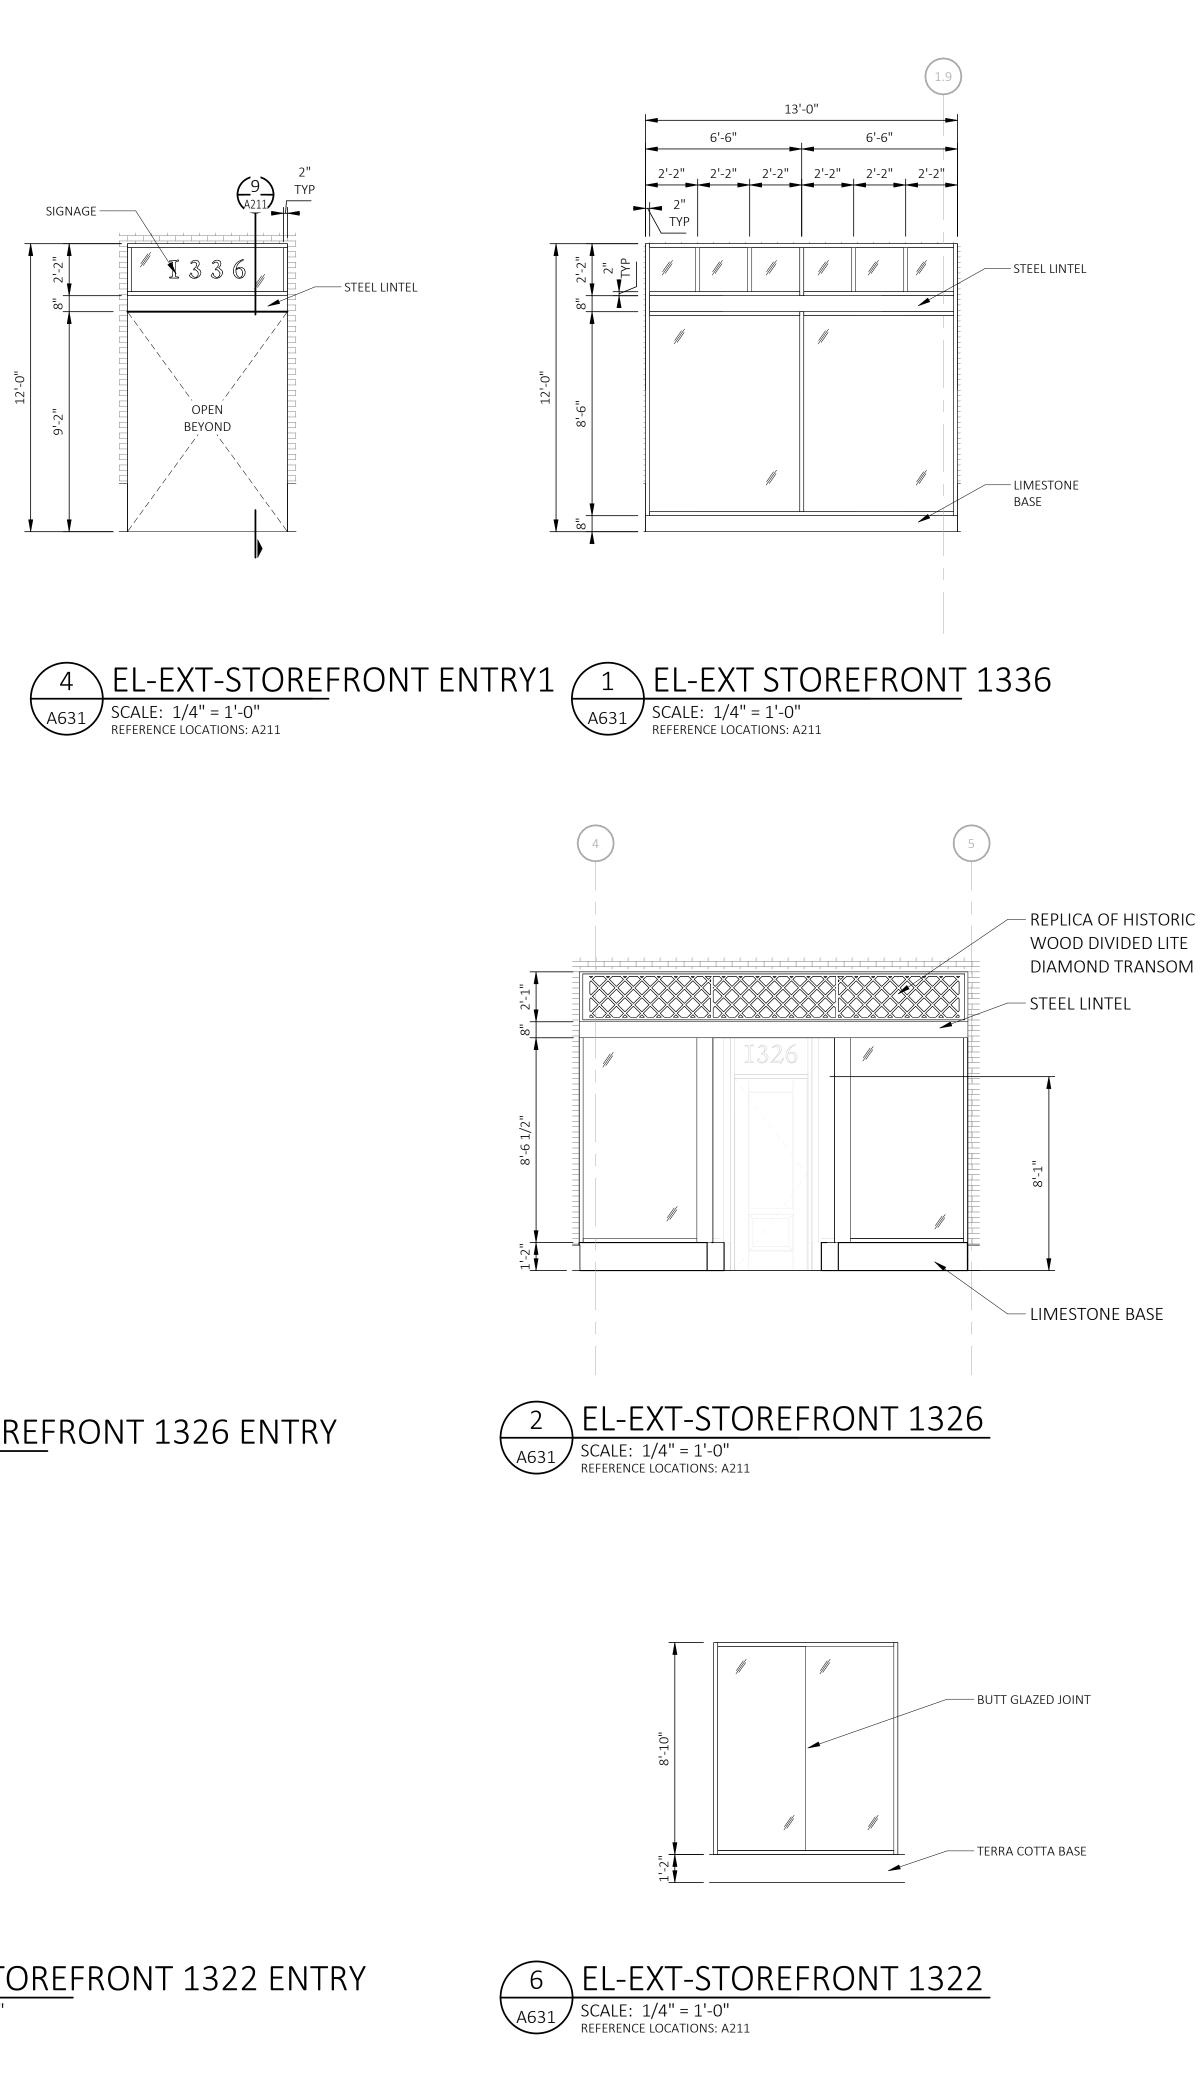


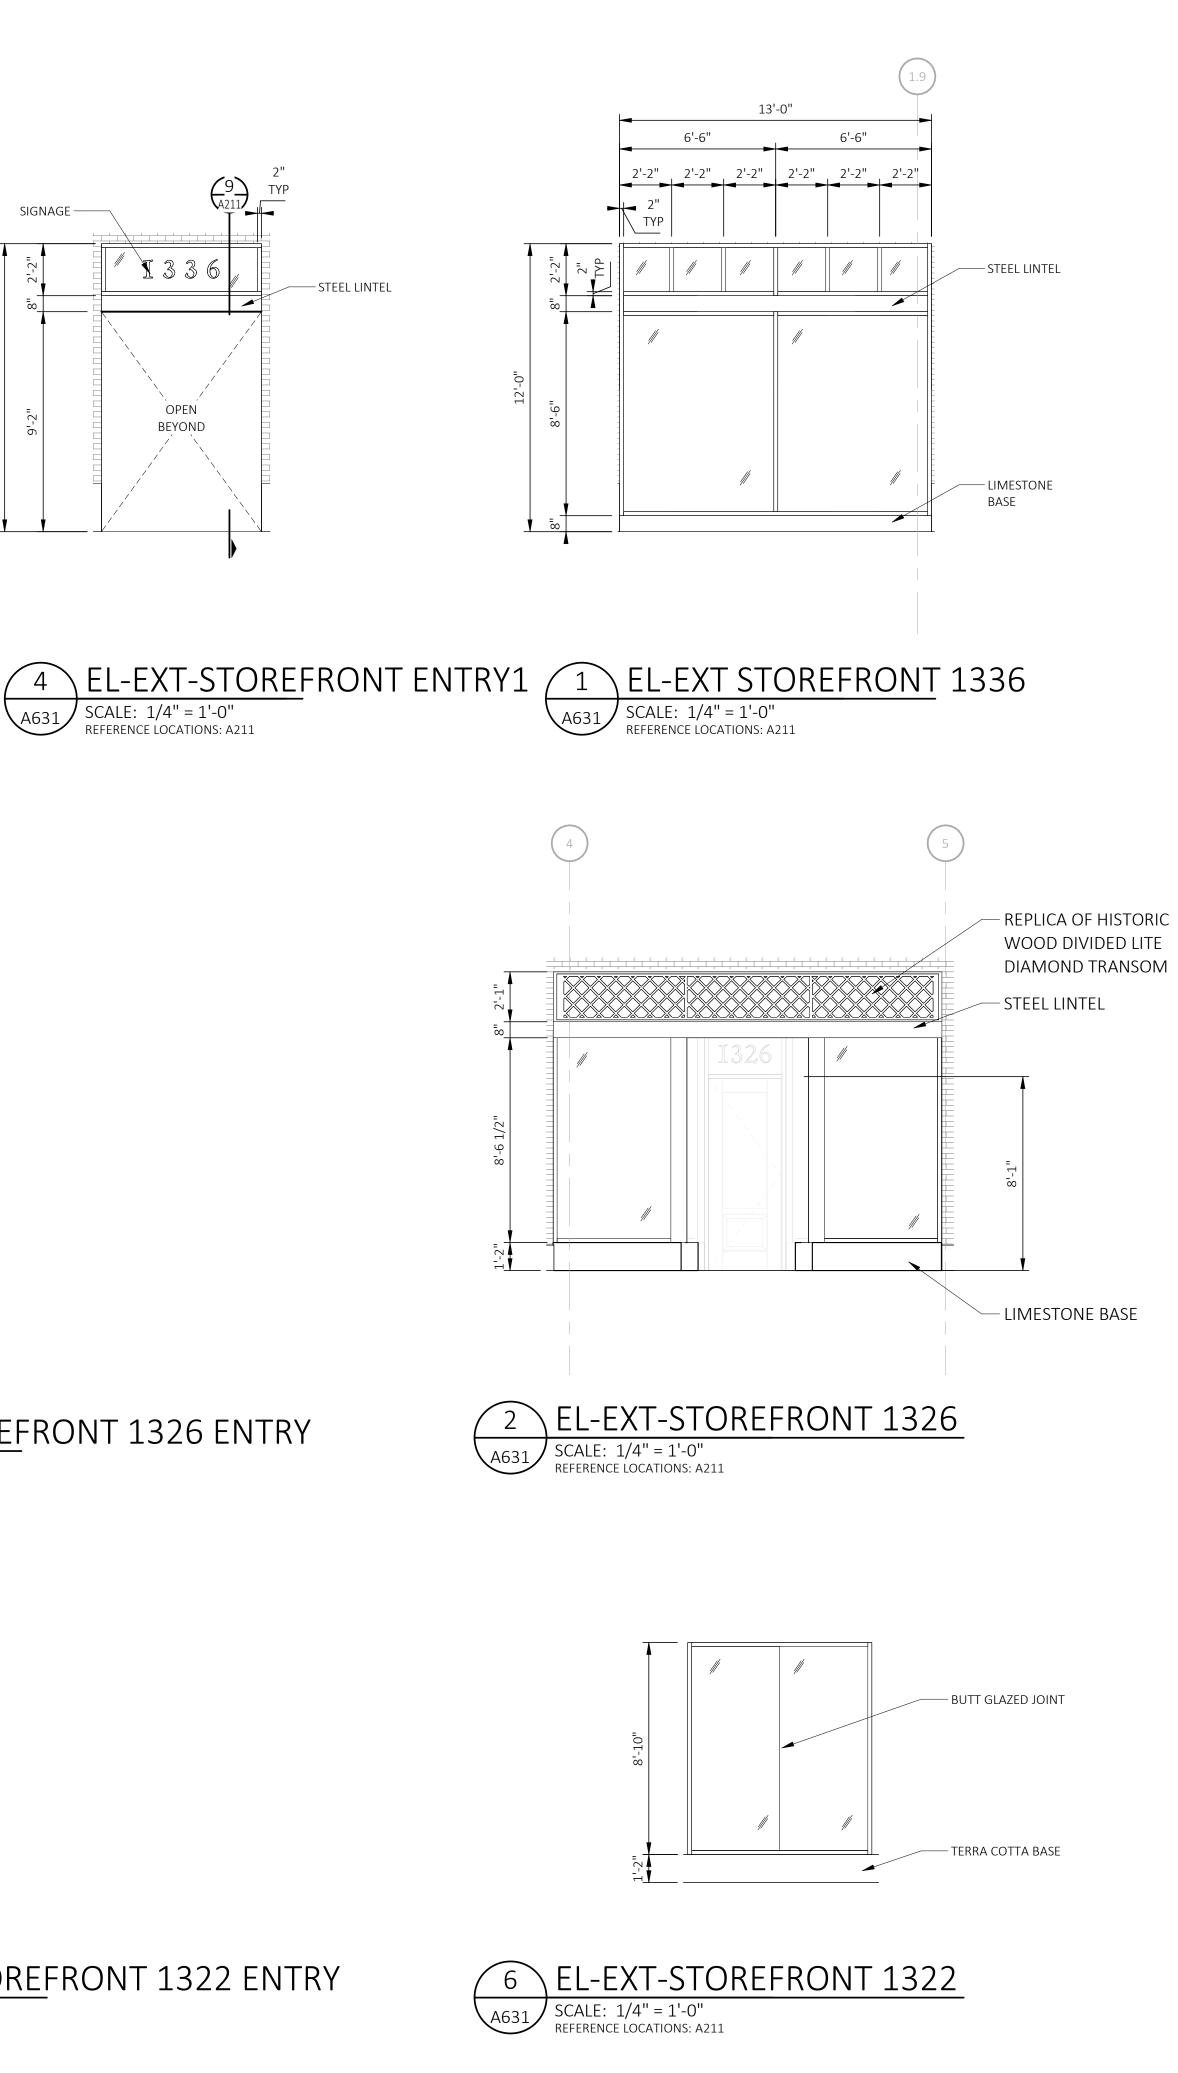

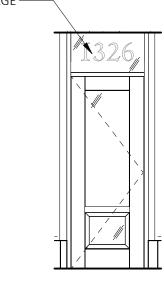

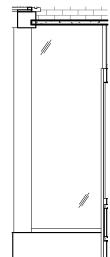

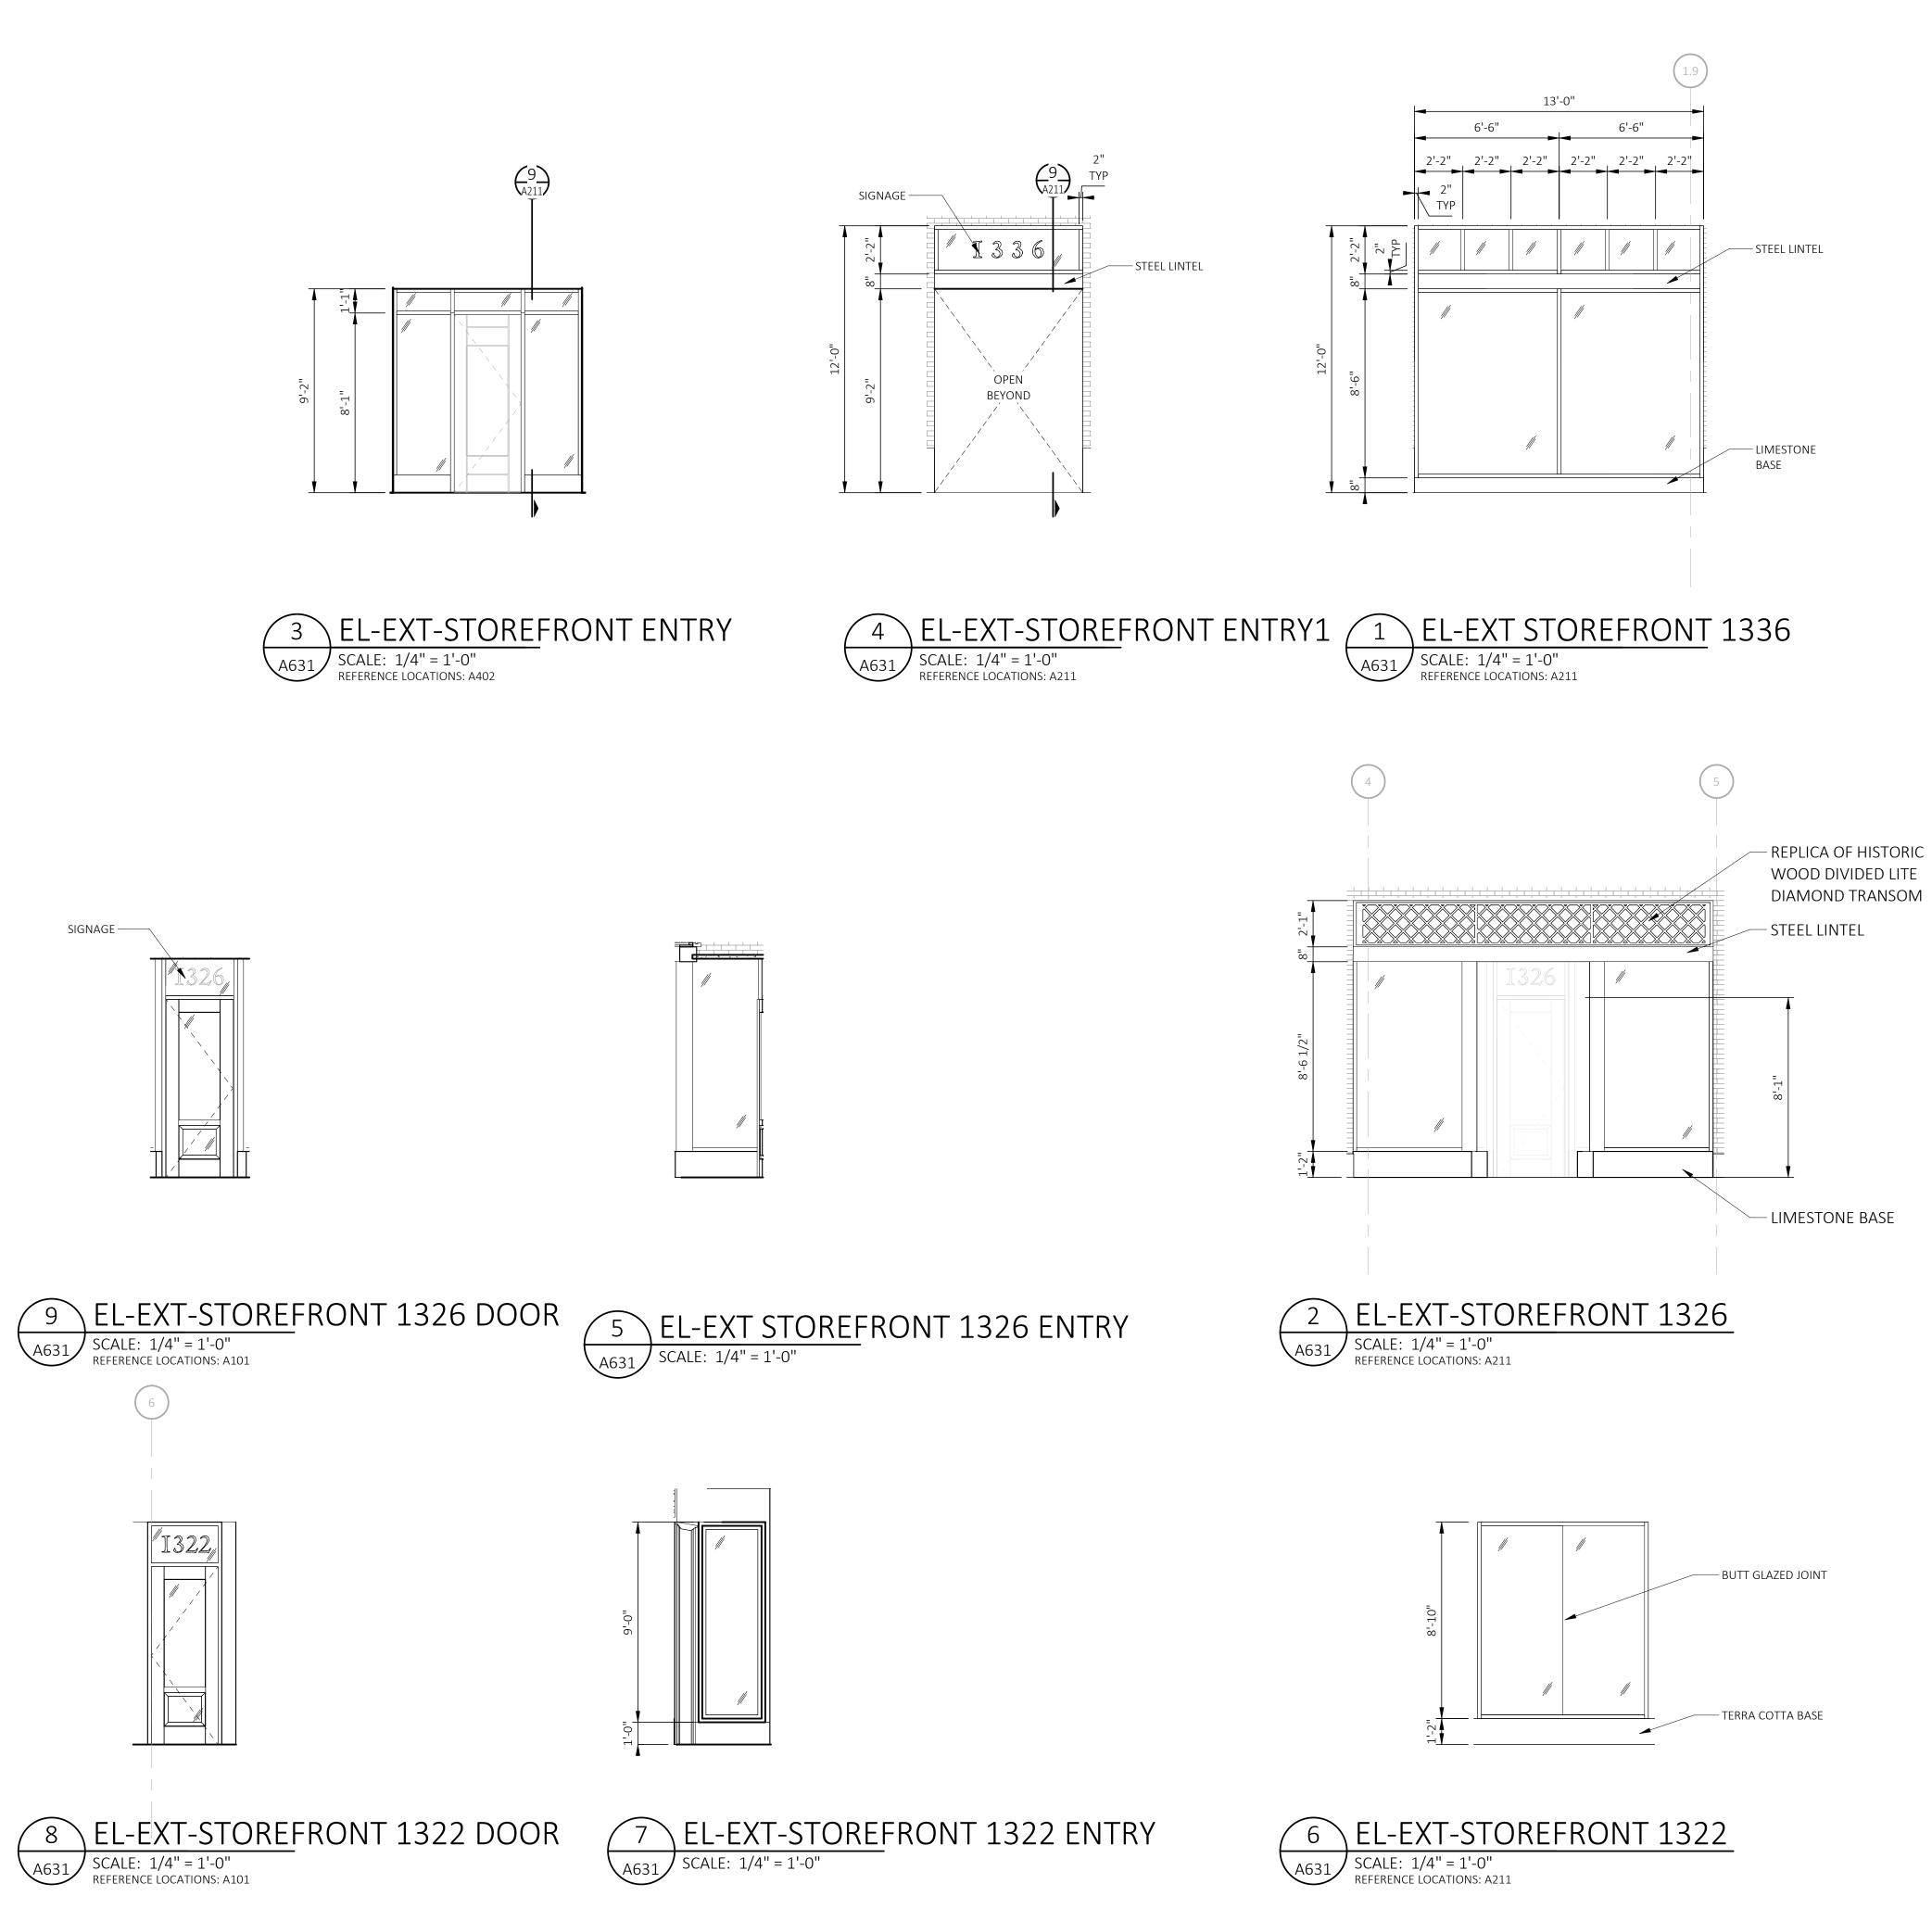

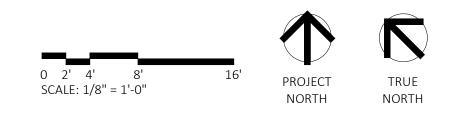



Acchieve       Charleston Bagadadada         Detroit, MI   Toledo, OH   Charleston, SC       14208   p313 965 3399         www.thekraemeredge.com       www.thekraemeredge.com
Consultant
BASSORESS, SUITE 2 DETROIT, MI
Owner
Broiet
PRELIMINARY NOT FOR CONSTRUCTION Seal
THIS DOCUMENT AND THE IDEAS AND DESIGNS INCORPORATED HEREIN, AS AN INSTRUMENT OF PROFESSIONAL SERVICE ARE THE PROPERTY OF KRAEMER DESIGN GROUP, LLC AND ARE NOT TO BE USED IN WHOLE OR IN PART FOR ANY REASON WITHOUT THE WRITTEN AUTHORIZATION OF KRAEMER DESIGN GROUP, LLC.
©COPYRIGHT 2023 KRAEMER DESIGN GROUP, LLC
Revision   Date     Date   PERMIT DATE     Project Number      Sheet Title
STOREFRONT ELEVATIONS AND DETAILS
Sheet Number A631