## BOARD AND BATTEN



### WHERE TIMELESS DESIGN MEETS MODERN ELEGANCE

The Board and Batten panel system provides a timeless design aesthetic for commercial and residential wall applications. It uses a concealed fastener system to maintain clean lines and a rhythmic pattern of alternating wide vertical boards and narrower elevated battens. The <sup>3</sup>⁄<sub>4</sub>" batten depth and 2" width create dimensional interest while keeping trim offsets to a minimum. Board and Batten panels blend smoothly into various architectural styles. Whether creating a cozy and inviting facade or a bold and striking statement, Board and Batten exterior wall panels remain a versatile tool for architectural creativity.



#### FEATURES

- Installs with concealed mechanical fasteners through pre-punched holes
- Vertical wall applications only
- ▶ Widths 12", 16"

- Batten is 2" wide and ¾" deep on all panel widths
- Maximum length for steel is 30 feet
- Maximum length for aluminum is 22 feet



HQ: 1005 Tonne Road Elk Grove Village, IL 60007 P: 800-PAC-CLAD F: 800-722-7150 9060 Junction Drive Annapolis Junction, MD 20701 P: 800-344-1400 F: 301-953-7627 10551 PAC Road Tyler, TX 75707 P: 800-441-8661 F: 903-581-8592 102 Northpoint Parkway Acworth, GA 30102 P: 800-272-4482 F: 770-420-2533 1800 S. 7th Ave., Suite 130 Phoenix, AZ 85007 P: 833-750-1935 F: 602-254-6504

9817 233rd Ave. E Suite A Bonney Lake, WA 98391 P: 253-501-2450

800-PAC-CLAD | PAC-CLAD.COM

PAC-CLAD® is a registered trademark of Petersen Aluminum Corporation. The PAC-CLAD finish is 70% full polyvinylidene fluoride (PVDF). 11/23

# BOARD AND BATTEN


### MATERIALS

.032 aluminum 24 gauge steel

### SPECS

12", 16" Wide

3/4" High

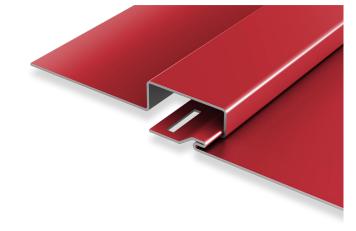

### FEATURES

- Installs with concealed mechanical fasteners through pre-punched holes
- Vertical wall applications only

12" or 16" O.C.

Widths - 12", 16"

- Batten is 2" wide and ¾" deep on all panel widths
- Maximum length for steel is 30 feet
- Maximum length for aluminum is 22 feet

