

JOB NAME \_\_\_\_\_

CONTACT \_\_\_\_\_

ORDERING CODE \_\_\_\_\_

## ORDERING CODE

LM-79


SERIES	EXT	exterior
TYPE	SKY-DZ SKY-SZ	skyline - down, zoom skyline - spot, zoom
LED	SW	standard white
DELIVERED LUMENS	10LM	780 lm
CCT	27K 30K 35K 40K	2700K 3000K 3500K 4000K
CRI	80 90	80 CRI 90 CRI
LENS OPTION	DZ1	dynamic zoom 10°-60°
VOLTAGE	24	24V
FINISH	BK <sup>1</sup>	black

## SKYLINE

Outdoor / Indoor Catenary Fixture IP63  
Standard White Down & Spot - Zoom

TYPE C2

TYPE C3

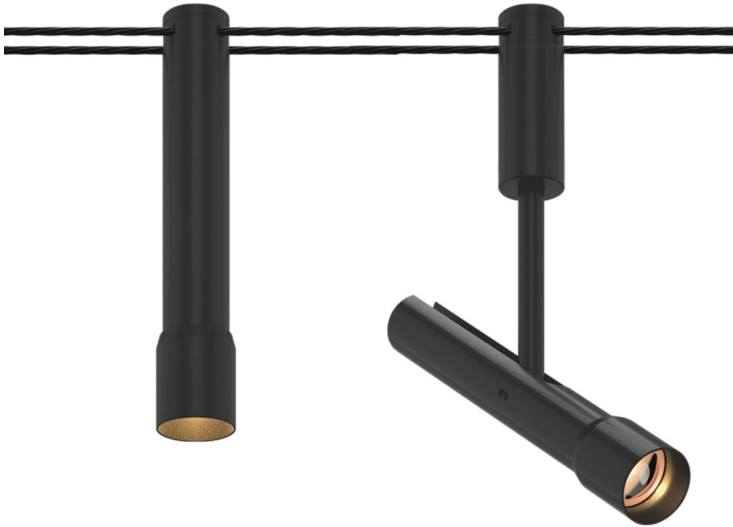

Down

Spot

ORDERING CODE \_\_\_\_\_


Follow the steps to specify your fixture, example:  
EXT - SKY - DZ - SW - 10LM - 30K - 90 - DZ1 - 24 - BK

SW (LED)	POWER	
DELIVERED LM	W (80/90 CRI)	LPW
780	10	78

NOTES  
1. For custom finishes consult factory.

EFFECTIVE PROJECTED AREA RATINGS (EPA)		
SKYLINE CONFIGURATION	EPA (FT2)	WEIGHT - LBS. / OZ.
SKY-DZ	0.05997	0.280 / 4.48
SKY-SZ	0.086	0.325 / 5.20

TYPE C1

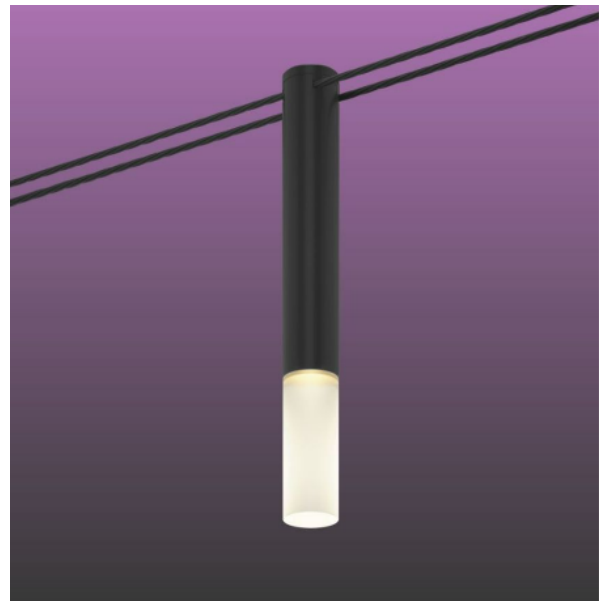

### DESCRIPTION

SKYLINE is a lightweight, highly versatile, and exceptionally elegant catenary system for indoor and outdoor applications. Up to 780 lumens from a 1" aperture cylinder. SKYLINE enables safe, reliable, clutter-free catenary on strong woven Kevlar, self-healing cable with marine grade, hard anodized aluminum fixture housings. Applications are endless, from outdoor gathering spaces to indoor accent lighting for retail and hospitality.

### HOUSING

- Hard anodized, marine grade aluminum in matte black.
- Polycarbonate protective IK10 rated.
- Ambient operating temperatures Min. -40°F / Max 131°F.
- IP 63 rated Down and Spot.

### MOUNTING

- Twin cable powered suspended catenary system

### ELECTRICAL /CONTROLS

- 0-10V and DALI dimmable, see remote drivers for details.
- 24VDC input



### LISTING

- ETLus listed to UL2108 (suitable for dry, damp and wet locations)
- cETL listed to CSA C22.2 #250.0

### LED INFO


- 90 CRI: SDCM = 3-step MacAdam Ellipse, Lumen Maintenance: L<sub>70</sub> > 100,000 hrs
- 80 CRI: SDCM = 3-step MacAdam Ellipse, Lumen Maintenance: L<sub>70</sub> > 100,000 hrs

## PRODUCT DIMENSIONS

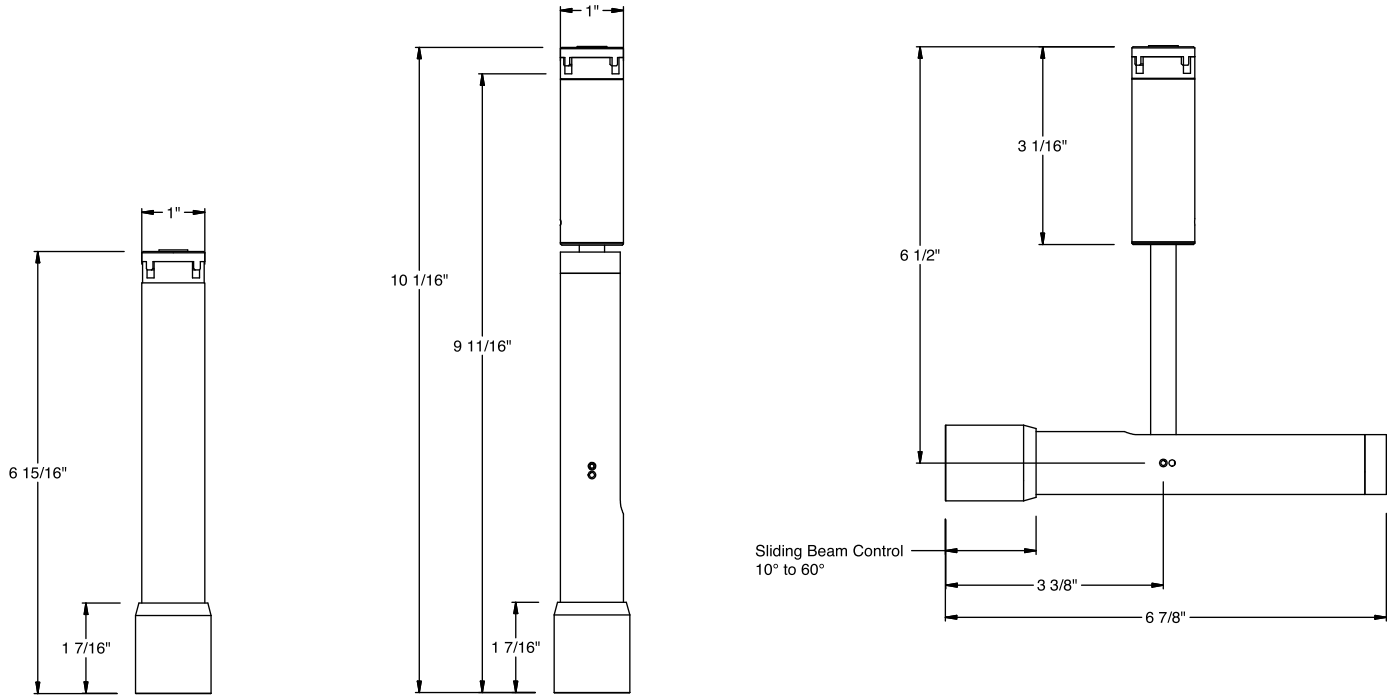

DOWN

EPA - 0.0599 sq. ft  
Weight - 0.280 lbs. / 4.48 oz.



SPOT

EPA - 0.0860 sq. ft  
Weight - 0.325 lbs. / 5.20 oz.

## BEAM DISTRIBUTION

### Dynamic Zoom

