Exterior Building Materials and Colors

- 1. Brick with concave gray mortar joints
- 2. Fiber cement panels
- 3. Metal trim at fiber cement panels
- 4. Stone cap on front entry brick wing walls
- 5. Front entry metal guard and handrail
- 6. Aluminum gutters and downspouts
- Windows: Pella Lifestyle Series wood / aluminum clad color: Wolf Gray
- 8. Front entry and ADA door: hollow metal with windows
- 9. Aluminum sectional garage door with windows: 16' wide x 8' high
- 10. Front entry metal suspended canopy with tension rods,
- 11. Rear bedroom metal suspended balcony with tension rods,
- 12. Roof parapet down lighting, brick wash over front entry:

Exterior Site Materials


- A. Front entry light wall mount
- B. Front entry lighted address plate
- C. Area light above garages and on building elevation along alley
- D. Brick wall wash LED lights between bays within roof parapet cap
- E. Metal car port





Badlands Smooth

Contains Recycled Content



Product Information:

Type: Facebrick

Color: Tan

Style: Extruded

Plant: Sergeant Bluff

Series: Cosmopolitan Series

Texture/Finish: Smooth


| Sizes | | | Technical Information | | | | |
|-------------------------|-----------|-----------|-----------------------|-----|-----------------------|--|--|
| General Availability | т | н | L | | Brick per sq ft | | |
| Modular | 3- 5/8 | 2- 1/4 | 7- 5/8 | in. | 6.86 | | |
| Utility | 3- 5/8 | 3- 5/8 | 11- 5/8 | in. | 3.00 | | |
| Norman | 3- 5/8 | 2- 1/4 | 11- 5/8 | in. | 4.57 | | |

You May Also Like



Home > James Hardie Panel Fiber Cement Siding Statement Collection

James Hardie Panel Fiber Cement Smooth Siding 48"x120" Pearl Gray 1pc

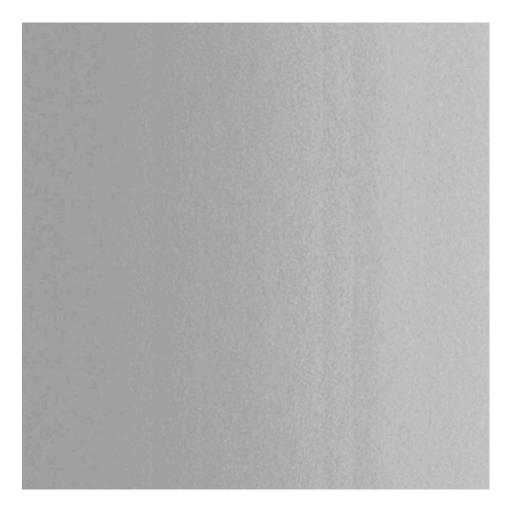

o o o

Be the first to review this product

\$130.18

| Color * | |
|------------|---|
| Pearl Gray | ~ |
| Texture * | |
| Smooth | ~ |
| Qty | |

1

Add to Cart

Add to Compare

*This is a special order product- subject to return restrictions. Shipping and return policy

This product is rated HardieZone 5 (HZ5). HZ5 materials are approved in HZ5 & HZ10 weather zones.

James Hardie HardiePanel Fiber Cement Smooth Siding 48"x120" Pearl Gray 1pc

You can't go wrong with this sleek, modern siding by industry leader James Hardie. Combine with HardieTrim boards for a rustic board-and-batten look. Or, go for the more minimalist look of simple vertical lines. Installed on over 8 million homes from coast to coast, James Hardie's fiber cement siding products are designed to resist the most extreme conditions while delivering long-term beauty and lower maintenance. We use the highest quality raw materials and proprietary additives for enhanced strength and moisture protection. Baked-on color delivers a beautiful finish that resists fading and makes a lasting impression.

Thickness: 0.31" Width: 48" Length: 10'

*Despite every effort to provide accurate images of each product, color may vary slightly due to photographic lighting sources or your monitor settings.

For colors or types of Hardie siding not included with this order, see "Related Products" below or use search feature.

| Details |
|---|
| Description James Hardie HardiePanel Fiber Cement Smooth Siding 48"x120" Pearl Gray 1pc Re-siding your house with HardiePanel Fiber Cement vertical siding is sure to add visual punch to your design. Warranty: |
| The warranty will be honored only through the manufacturer, James Hardie. For your convenience, product warranty information is attached below; please click the link to view the current warranty policy on the manufacturer's site. If you need further assistance regarding your coverage or have other inquiries, please contact the manufacturer directly. |
| James Hardie Warranty Information Reviews |

Related Products


Check items to add to the cart or

select all



THE EASY CHOICE

Bold Design. Superior Functionality.

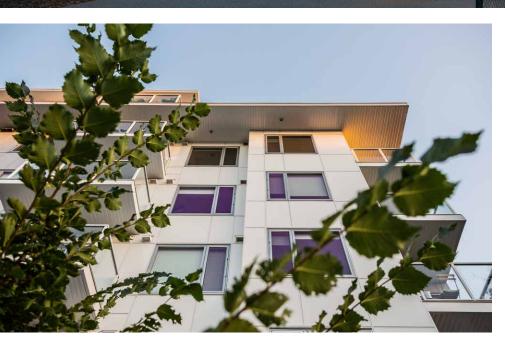




EasyTrim Reveals[®] is a complete two-piece, exterior aluminum trim system compatible with the most popular lap, siding and panel options on the market. EasyTrim Reveals[®] is the go-to for both residential and commercial projects across North America.

- UV / Fade Resistant
- Full-Edge Protection
- Anti-Corrosive
- Maintenance Free
- Moisture Management
- No-Sharp Edges










The Easiest Choice to Make

More than just a trim solution, EasyTrim Reveals[®] significantly reduces installation time and enhances the building's exterior performance, minimizing the need for ongoing maintenance. Our Fit and Finish[™] system features overlapping trims that protect siding from moisture and harsh elements. This design not only preserves the aesthetics but also extends the life of your building exterior, making EasyTrim Reveals[®] the smart choice for long-lasting quality.



Multiple Colors and Finishes to Choose from

Full selection of color options available on our website.

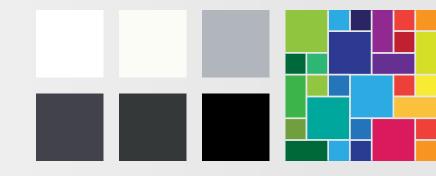

Visit our website to engage with a representative or to find out more about our two-piece trim system:



+1 877 973 8746 info@engagebp.com engagebp.com/easytrim



Powder Perfect Exteriors

INDIANA LIMESTONE - STANDARD GRAY™



LIMESTONE



DESCRIPTION

This neutral limestone possesses a subdued palette featuring light to medium shades of gray. A restrained, underlying vein pattern and subtle grain movement are visible in the fine to medium grained surface.

1897

QUARRY OPERATING SINCE | ANNUAL PRODUCTION 12 000 m³ and more (423 776 cu. ft.)

AVAILABLE FINISHES Honed Sandblasted

Split Face Tumbled

APPLICATIONS

Exterior Interior Horizontal Vertical Commercial Residential

Bush-Hammered

Wire Brushed

PHYSICAL TEST RESULTS

| | | Imperial | Metric |
|----------------------|-----------|------------|----------------|
| Absorption by weight | ASTM C97 | 7.5% | 7.5% |
| Density | ASTM C97 | 144 lb/ft³ | 2 306.66 kg/m³ |
| Compressive strength | ASTM C170 | 4 000 Psi | 27.58 MPa |
| Modulus of rupture | ASTM C99 | 700 Psi | 4.83 MPa |

NATURALLY SUSTAINABLE™

Health Product Declaration[®] available 2020 ANSI/NSC 373 Certified Quarry since 2018




QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.





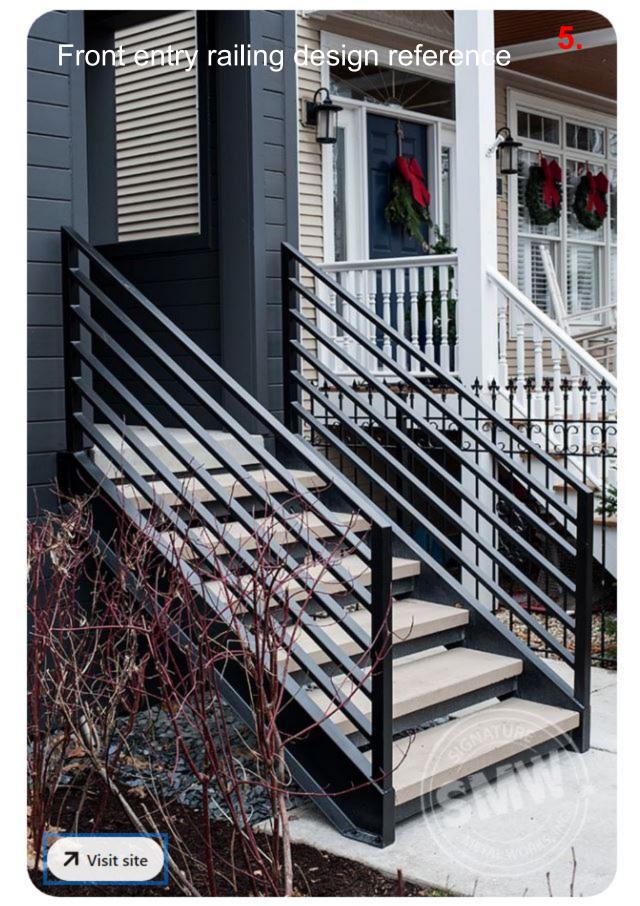

➡ info@classicgutters.com

Home Ordering Info My Account FAQs Contact Catalog Q E Top Menu



E Top Menu 👂



Products About Us Learning Center

Estimate Forms

Installations 📜 \$0.00 🛛

8" Aluminum Box Gutter

Home / 8" Box Gutter & Accessories / 8" Aluminum Box Gutter



\$6.50

Minimum order 20'. Our 8" x .040" Aluminum Box Gutter can be shipped in lengths of 6, 10, 15 and 19 feet. Gutter can also be shipped at 20 & 26 foot lengths, but is considered and rated as excessive length by freight companies. (6' maximum lengths shipped via UPS)

Available in low gloss white, almond, dark bronze, and royal brown (see Aluminum Color Chart below).

Price shown is **per foot**, please enter the **total number of feet needed** in the Quantity box. IMPORTANT: When you're checking out, you'll have the opportunity to specify the quantity of each length of gutter you need. You'll enter this info in the "Order Notes" box at checkout.

Gutter orders LONGER than 6' will be shipped via truck and subject to a MINIMUM shipping fee of \$150.00

One to five pieces of gutter can be sent UPS in 6' sections. UPS charges will run in the \$100 range. Please indicate in the "Order Notes" area at checkout whether you want a UPS or freight quote.

Each gutter and downspout order is unique at Classic Gutter Systems. Once you've placed your order on this website, you'll be contacted within 48 hours with a complete, detailed quote including packaging and shipping costs.

Color





Categories: 8" Box Gutter & Accessories, Bulky SKU: N/A

Tag: Gutter Systems

➤ info@classicgutters.com

E Top Menu 👂



Products About Us

Learning Center

Estimate Forms

e Forms Ins

Installations 📜 \$0.00 🛛

4" x .024 Aluminum Corrugated Round Downspout, Select Colors

Home / 4" Round Downspout / 4" x .024 Aluminum Corrugated Round Downspout, Select Colors





We recommend corrugated downspout for areas of the country that experience snow and ice. Corrugation allows for expansion in the event of ice build-up in the downspout, and also helps hide nicks and dents from daily exposure.

Note: Select Color corrugated aluminum downspout, shown here in Grecian Green, is priced the same per 10-foot length as our Standard Colors (see Aluminum Color Chart below).

Due to the machine setup required to produce Select Color Corrugated Downspout and Elbows, there is a \$100.00 up charge (one up charge per color, per order).

Downspout sections are available in 10′ pre-cut lengths. Each box holds 60 ft. of 4″ downspout. Don't forget to order additional downspout for elbow offsets and future repairs.

You will need to reduce the size of the opening on the elbows and downspout.

Downspout orders LONGER than 6' will be shipped via truck and subject to a MINIMUM shipping fee of \$150.00

One to three pieces of downspout can be sent UPS. The 10' downspout will be cut into 6' & 4' sections. UPS charges will run in the \$100 range. Please indicate in the "Order Notes" area at checkout whether you want a UPS or freight quote.

To order Corrugated Select Color Downspout, please call us at 269.665.2700.

Categories: 4" Round Downspout, Round Downspout SKU: DS4SC

Tag: Downspout Systems

Description Additional information



Pella[®] Lifestyle Series

Clad/Wood



7.

#1 performing wood window and patio door for the combination of energy, sound and value.¹

Triple-pane casement



Dual-pane casement



Performance redefined

You don't have to compromise on any aspect of performance. Available performance solutions offer an unbeatable combination of energy efficiency, sound control and value.¹

• ENERGY STAR® certified²

Pella products offer energy-efficient options that will meet or exceed ENERGY STAR guidelines in all 50 states. Pella Lifestyle Series products with triple-pane glass have been awarded ENERGY STAR Most Efficient Mark in 2023.

• Enhanced sound control

Our patented, triple-pane design with Advanced Low-E glass allows for mixed glass thickness for enhanced sound dampening resulting in an average 52% noise reduction versus single-pane windows.³

• Popular features and options

Low-maintenance aluminum-clad exteriors. Factory prefinish with a choice of several paints and stains, or choose primed or unfinished. Several grille types and patterns and high-transparency screens are also available.

Intentional design for improved durability

Intentional jamb/sill design helps seal the end grain of the wood and elevates it off the rough opening, reducing the potential for moisture.

• Durable 3-way corner joint

Three-way corner joints are made up of mortise-and-tenon, metal fasteners and commercial adhesive for added strength and durability.

• Low-maintenance exteriors

Aluminum-clad exteriors with EnduraClad[®] finish resists fading and chalking. It is applied in an overlapping fashion for exceptional protection.

• Exclusive wood protection

Pella's exclusive EnduraGuard® wood protection is applied after the pieces have been cut and milled, but prior to final assembly. It provides advanced protection against the effects of moisture, decay, stains from mold and mildew — as well as termite damage.

Best limited lifetime warranty⁴

Pella Lifestyle Series products are covered by the best limited lifetime warranty in the industry for wood windows and patio doors.⁴

Testing beyond requirements


At Pella, our products are tested beyond requirements to help ensure they have long-lasting performance and reduce call-backs for you.

Available in these window and patio door styles:5



EXTRUDED ALUMINUM-CLAD EXTERIORS

For exceptional durability, Pella Reserve products are available with extruded aluminum-clad exteriors. Choose from a wide variety of exterior colors or create a custom color to match your design. Low-maintenance EnduraClad exterior finish provides long-lasting beauty. EnduraClad Plus is also available.

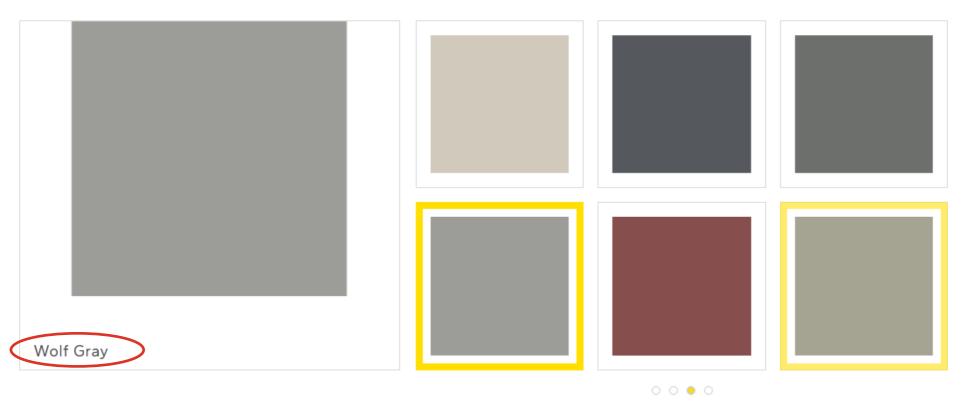

THERMA TRU® DOORS

Style Option = TS81RCL-FF

Steel Single

Impact Rating : None Call Width : 3'0" Call Height : 8'0" Door Collection : Traditions Steel Line : Pulse Glass Shape : Pulse Linea Style Shape : Pulse 8' Linea Offset Right Glass Type : Clear Glass Glass Design : Clear Grille Pattern : None Grille Style : None Low-E? : No Caming : None Frame Profile : Flat Profile Door Prefinish : Paint 1 Color Door Paint Color : Granite Jamb Prefinish : Paint 1 Color Jamb Paint Color : Granite Hardware : No Hardware Would you like to include a storm door? : No



1/21/2025

Date

Copyright © 2023 Therma Tru Corp. All Rights Reserved. www.thermatru.com



Home / Details

Insulated Steel Garage Doors

THERMACORE® COLLECTION - MODELS 5720, 5740 & 5760




VIEW FULL GALLERY

Thermacore[®] Collection insulated steel doors are the ideal choice for premium construction and maximum thermal efficiency. This series of doors feature construction of steel-polyurethane-steel as well as between-section seals with thermal breaks to reduce air infiltration. With several panel designs to choose

these doors offer design flexibility, durability and thermal efficiency that will help keep your home rtable in cold or hot climates. Thermacore[®] Collection premium insulated garage doors deliver maximum thermal efficiency and design flexibility.

Learn more about our new Artisan Wood Grain[™] finish options!

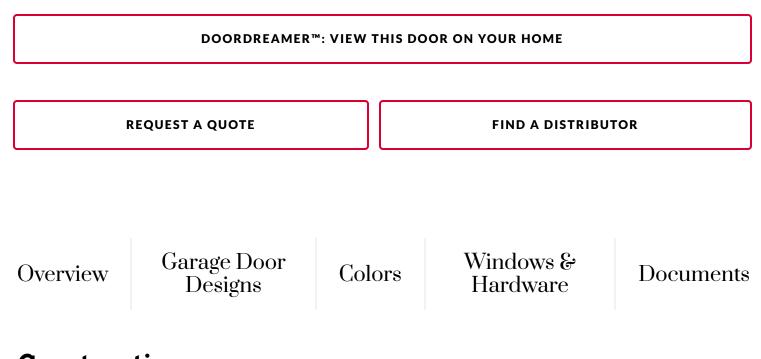

Construction

Product Specifications

| 5 Panel Options Available | Standard, Flush, Long, Microgroove, Vertical Short and Vertical Lo |
|--------------------------------------|---|
| Thermacore [®] Construction | Provides a continuous layer of foamed-in-place, CFC-free polyuret door insulation sandwiched between two layers of corrosion-resis maximum thermal efficiency |
| Polyurethane Garage Door Insulation | Provides thermal efficiency U-factor* of .20 ($_{9.31 \text{ R-value}^{**}}$): Model 5720 U-factor* of .15 ($_{12.76 \text{ R-value}^{**}}$): Model 5740 U-factor* of .10 ($_{17.5 \text{ R-value}^{**}}$): Model 5760 |
| Multiple Surface Options | Embossed wood grain, microgroove wave pattern and smooth |
| Steel Backing | For clean, finished interior appearance |
| Durable Finish | Hot-dipped galvanized steel with two coats of baked-on polyester |

Product Specifications

| In-between Section Seals | Seals provide superior resistance to the elements |
|------------------------------|---|
| Bulb-type Bottom Weatherseal | Guards against wind and rain while providing a cushion when closi |
| Wind Load | Our WindStorm [™] wind load rated system is available on selected r regulations for a variety of wind speeds, ensuring your door is built varying wind conditions, including hurricane-force winds, and mee stringent local building codes. |

*U-factor values are independently tested and verified per ANSI/DASMA 105.

**Overhead Door™ Brand uses a calculated door section R-value for our insulated doors.



Overhead DoorTM Brand participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of sectional doors. The lower the U-factor rating, the better the thermal performance.

Symbol indicates verified U-factor rating in accordance with the DASMA Thermal Performance Verification Program.

Warranty

- 20-year limited warranty on Models 5720
- Limited lifetime warranty on door Models 5740 and Model 5760

Residential garage door and opener system limited warranty

• (when purchased together) - features 3 year on components (see warranty for details)


Thermacore[®] Collection premium insulated garage doors deliver maximum thermal efficiency and design flexibility.

Learn more about our new Artisan Wood Grain[™] finish options!

Forest Geen

Gray

Black

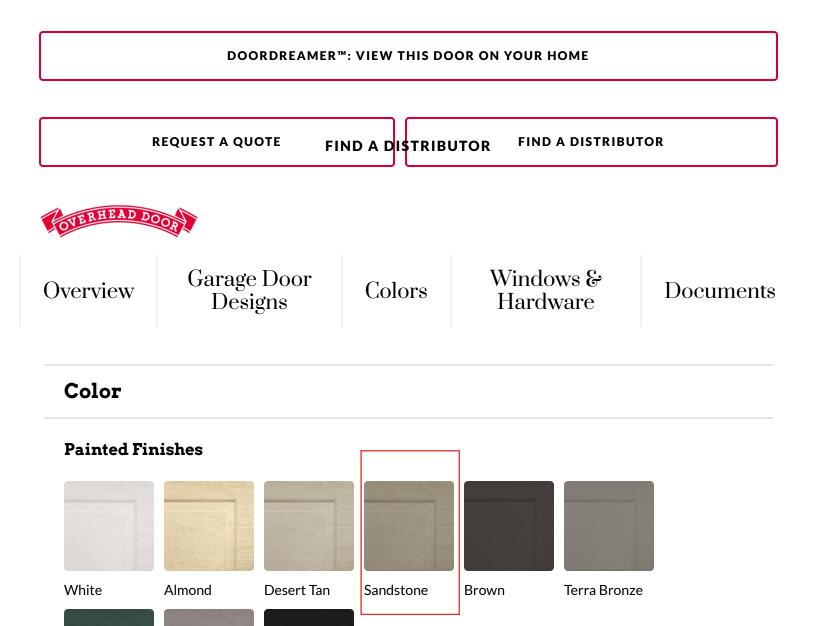



alumiLAST® Canopies/Sunshade Specifications

PRODUCT DESCRIPTION

An engineered aluminum canopy framing system designed for commercial and residential applications. The system is strong, lightweight, and maintenance free. The aluminum components have a durable powder coat finish, are saltwater resistant, and available in a wide choice of standard and custom colors. Endurable framing systems are fabricated to meet Uniform, BOCA, and National Building Code.

PART 1 GENERAL

1.1 WORK INCLUDED:

A. Provide aluminum canopy framing system in prefabricated sections per approved engineering drawings.

1.2 REFERENCE STANDARDS:

- A. Uniform Building Code 1997
- B. BOCA National Building Code 1993
- C. IBC 2003, 2006, 2009 and 2015

1.3 SUBMITTALS:

- A. Provide shop drawings and product data.
- B. Within thirty calendar days after the contractor has received the owner's notice to proceed, submit shop drawings that indicate scope of project, component details, materials, finish, fasteners and anchorage methods, and the relationship to adjoining work
- C. Shop Drawings shall be signed and sealed by the professional engineer responsible for the design



1.4 QUALITY ASSURANCE:

- A. Framing systems are based upon Endurable alumiLAST deck framing system as the standard of quality. No substitutions will be accepted.
- B. Design criteria: decking assemblies shall be designed to conform to all applicable building codes and loading requirements.

1.5 WARRANTY:

A. 25 year warranty covering material and workmanship (See manufacturer's warranty statement for specific details)

1.6 DELIVERY, STORAGE, AND HANDLING:

- A. Deliver materials to the job site in good condition. Purchaser to store in clean, dry location, properly protected against damage to finished surfaces.
- B. Store away from uncured concrete, masonry, or stucco

6500 Shingle Creek Parkway • Brooklyn Center, MN 55430

Product Description

alumiLAST[®] Canopies/Sunshade Specifications



PART 2 PRODUCTS

2.1 MATERIALS:

- A. Extrusion Alloy: 6005A-T6, 6061-T6, or other 6000 series aluminum alloy.
- B. Screws, bolts, washers, hardware shall be stainless steel or other corrosion resistant material.

2.2 FINISHES:

A. TGIC polyester powder coating, electro-statically applied to 2-3 mil thickness. Color to be selected by the architect/ owner from manufacturer's standard or custom colors

2.3 FRAME COMPONENTS:

- A. Joists
 - 1. 1-1/2" x 3", 4", 5", 6 7/8" x 1/8" aluminum tube
- B. Perimeter Framing*

1. 6" C-Channel or 1 $\frac{1}{2}$ "x 6" or 2" x 8" x 1/8" aluminum tube

C. Posts

1. 3", 4", 6" \times 1/8" square aluminum tube or snap fit aluminum columns.

D. Plate

1. $\frac{1}{2}$ aluminum mounting plate

E. Frame Enclosures

1. .100 alum flat sheet – top & bottom (top welded on, bottom screwed on after installation)

* Subject to change based on span

2.4 FABRICATION:

- A. Fabricate canopy assembly to design dimensions, details, and specified requirements for structural performance.
 Fabricate members and fittings to provide flush, smooth, joints
- B. Owners representative/contractor to verify dimensions on site prior to fabrication

PART 3 EXECUTION

3.1 INSTALLATION:

- A. Install work in accordance with final shop drawings and manufacturer's instructions
- B. Erect work plumb, square and level, free from distortion or defects detrimental to appearance or performance
- C. Anchor posts to footings with approved corrosion resistant fasteners

3.2 CLEANING:

- A. Wash framing using clean water and soap, rinse with water
- B. Do not use acid solution, steel wool, or other harsh abrasive

6500 Shingle Creek Parkway • Brooklyn Center, MN 55430



Standard Balconies

We fabricate our standard alumiLAST® balconies using aluminum tube construction. We can combine these balconies with our aluminum decking or composite decking. These balconies feature welded aluminum railing supports with a variety of panels, and we deliver it to your site with the decking already installed and the railing and panels or pickets cut to fit and ready for easy installation.

These all-aluminum balconies usually attach to the building with lag bolts and threaded rods. However, alternative designs such as cantilevering, bolt-on or attaching with only knifeplates are possible. We match the attachment technique to meet your plan requirements.

Product Description



alumiLAST[®] Decking General Information

PRODUCT DESCRIPTION


Endurable Building Products, the manufacturer of alumiLAST® deck and balcony frames, introduces alumiLAST® Decking, a line of powder coated aluminum decking. alumiLAST® decking features interlocking boards designed to be virtually watertight, and with the addition of a custom gasket, the boards can be completely watertight. Custom engineered starter strips and edge trim pieces are also available.

alumiLAST® DECKING FEATURES AND BENEFITS

Non-slip textured powder coat finish.

- Light weight. Boards weigh approximately 1 pound per foot.
- Low maintenance. Boards will not crack or split.
- Non-combustible. Aluminum will not burn.
- Five standard colors: Bronze, Black, Light Gray, Storm Gray & Wheat (Custom colors also available).
- Limited Lifetime Warranty.
- 5 year powder coat finish warranty.

DECKING STANDARD COLORS

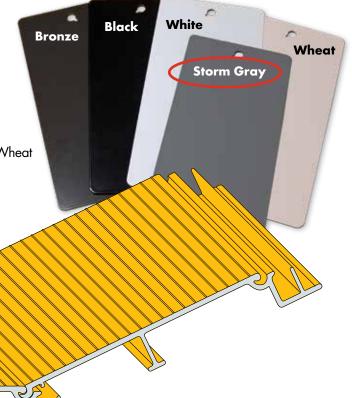

6500 Shingle Creek Parkway • Brooklyn Center, MN 55430



Project:

Fixture Type: Location:

Contact:

Z-1080 LED

Wall Mounted Vertical Only · Wet Location Listed PROGRESS LED



Description:

Transform the mundane everyday with the sophisticated styling of this LED outdoor sconce. A smooth, elongated frame with a black finish dominates the design and exudes a modern attitude perfect for indoor or outdoor spaces. A beautiful, acrylic shade stretches into a rectangular form, held in place by simple metal bars at each end for a picture-perfect finish. Vertical mount only.

Specifications:

- White acrylic Diffuser
- A beautiful, acrylic shade stretches into a rectangular form, held in place by simple metal bars at each end for a picture-perfect finish.
- A smooth, elongated frame with a black finish dominates the design and exudes a modern attitude perfect for indoor or outdoor spaces.
- Transform the mundane everyday with the sophisticated styling of this LED outdoor sconce.
- Ideal for any foyer, bedroom, entryway, porch, or patio.
- $\cdot\,$ Perfect for transitional, modern, or contemporary settings.
- Measures 5-inch width by 13-inch height.
- Uses one integrated LED (11w max).
- Compatible with many Triac/ELV dimmers (see dimming controls)
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Dimmable to 10% brightness (See Dimming Notes)
- · Canopy covers a standard 4" recessed outlet box: 4.75 in W., 12.5 in ht., 1.875 in depth
- Mounting backplate for outlet box included
- + 6 in of wire supplied
- · Americans With Disabilities Act (ADA) compliant

Performance:

| Number of Modules | 1 |
|------------------------|------------------------------------|
| Input Power | 11 W |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Lumens/LPW (Delivered) | 415/37 (LM-79) |
| ССТ | 3000 K |
| CRI | 90 CRI |
| Life (hours) | 54000 (L70/TM-21) |
| EMI/RFI | FCC Title 47, Part 15, Class B |
| Warranty | 5-year Limited Warranty |
| Labels | cCSAus Wet Location Listed |
| | ENERGY STAR [®] qualified |
| | Meets California Title 24 JA8-2016 |


P560210-031-30



Dimensions:

Width: 5 in Height: 13 in Depth: 3 in H/CTR: 6-1/2 in

White acrylic Diffuser Width: 4-1/8 in Height: 12-1/8 in





Z-1080 LED

Wall Mounted Vertical Only · Wet Location Listed PROGRESS LED



Dimming Notes:

P560210-031-30 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

| Leviton IPI06-1LZ |
|-------------------|
| Leviton 6674 |
| Lutron NTEVL-300 |
| Lutron DVELV-300P |
| Lutron AYCL-153P |

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

P560210-031-30

Shipping to: Ashburn, VA -

Maxim 13" Wide LED Outdoor Address Light

Model: 53610BZ | Item: bci3711150 from the Address Collection

★★★★★ (1)



€



\$60.00

Finish: Bronze - 1091 In Stock


Bronze

Free Shipping!

Leaves the Warehouse in 1 to 2 business days - Shipping to 20147

Β.

>

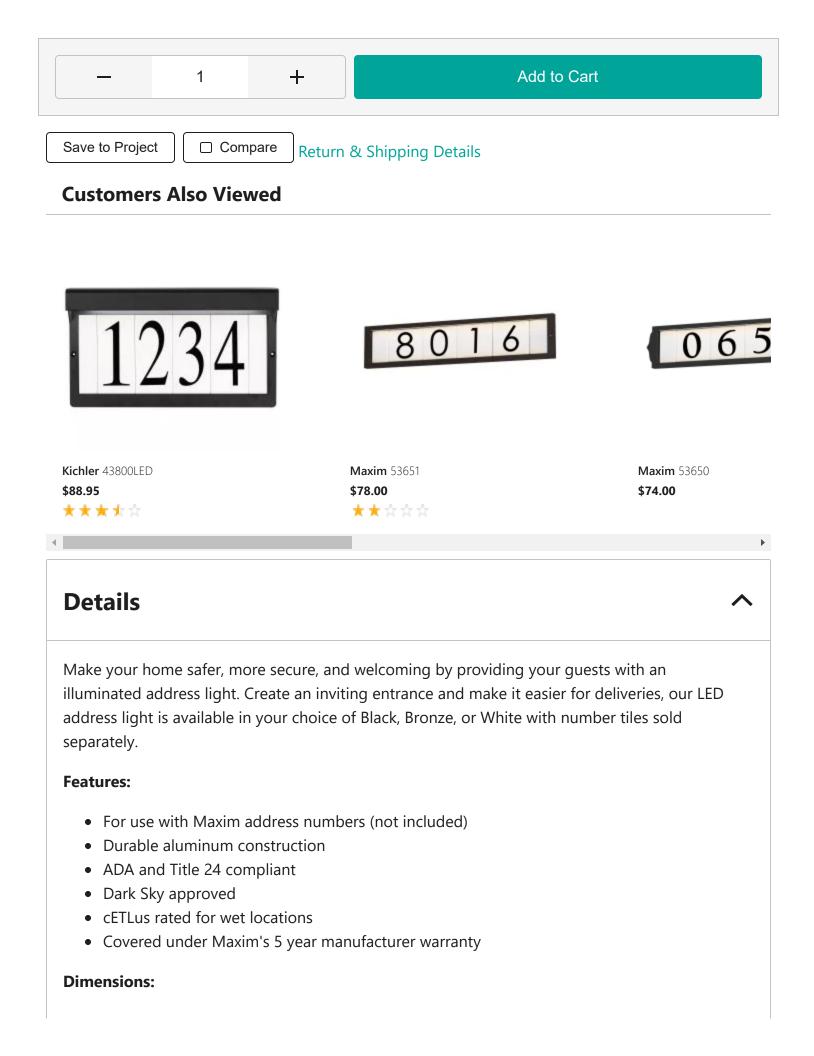

- Height: 7"
- Width: 12-1/2"
- Extension: 2-1/4"
- Product Weight: 1.21 lbs
- Wire Length: 6"

Electrical Specifications:

- Wattage: 3W
- Lumens: 160
- Color Temperature: 3000K
- Color Rendering Index (CRI): 80
- Average Hours: 25000

Additional Maxim Links

- View the Manufacturer Warranty
- Browse all Maxim Products
- Maxim Address Collection

Manufacturer Resources

Specification Sheet

Dimensions and Measurements

| Extension | 8 | 2.25 in. |
|---------------------|---|-----------|
| Height | ? | 7 in. |
| Nominal Height | ? | 7 in. |
| Nominal Width | ? | 13 in. |
| Product Weight | 8 | 1.21 lbs. |
| Width | 8 | 12.5 in. |
| Wire Length | 9 | 6 in. |
| Included Components | | |
| Bulb Included | 9 | Yes |

FIN - model: WP-LED1 Endurance Wallpack

WAC LIGHTING

Responsible Lighting®

| ENERGY STAR |
|-------------|

PRODUCT DESCRIPTION

Die cast aluminum factory sealed housings with patent pending design for a water and dust proof IP66 rated outdoor luminaire

FEATURES

- Factory-Sealed LED Light Engine
- 20° Forward Throw Illumination
- Photo/Motion Sensor Compatible (Sold Separately)
- Built-in Level For Easy Adjustment
- Suitable to install in all directions
- Multi-Function Dimming: ELV (120V) or 0-10V
- 85 CRI
- 100,000 hour rated life

ORDER NUMBER

| Fixture Type: AF | REA LIGHT | С. |
|------------------|-----------|----|
| Catalog Number: | | |
| Project: | | |
| Location: | | |

SPECIFICATIONS

Construction: Die-cast aluminum


Power: Integral driver in luminaire. Universal voltage input (120V-277V) **Dimming:** 100% - 30% with 0 - 10V dimmer (120V - 277V)

100% - 15% with Electronic Low Voltage (ELV) dimmer (120V only)

Finish: Powder coated Bronze, Graphite, and White

Standards: Energy Star®, DLC Listed, IP66, Wet Location, ETL & cETL Listed

PHOTOMETRY

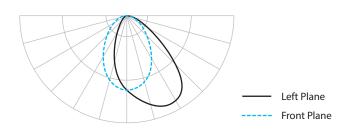

| | | | Delivere | ed Lumens | | | | | |
|-------------------------------------|-------------------|--------------------------------|----------------------|----------------------|----------|----------------|----------------|--|--|
| | Power | Comparable | 3000K | 5000K | Color | Temp | Finish | | |
| WP-LED119 WP-LED127 WP-LED135 | 19W 27W 35W | 39W HID 70W HID 100W HID | 1390 2075 2750 | 1460 2135 2825 | 30 50 | 3000K 5000K | BZ GH WT | <mark>Bronze</mark> Graphite White | |
| | | | | | | | | | |


Example: WP-LED119-50-BZ

ACCESSORIES

| | Motion Sensor (120V) | MS-120-BZ MS-120-GY MS-120-WT | Bronze Gray White | | Photo Sensor (120V) | PC-120-BZ PC-120-GY PC-120-WT | Bronze Gray White |
|--|-------------------------|-------------------------------------|-------------------------|--|------------------------|-------------------------------------|-------------------------|
|--|-------------------------|-------------------------------------|-------------------------|--|------------------------|-------------------------------------|-------------------------|

WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive • Port Washington, NY 11050 Phone (516) 515.5000 • Fax (516) 515.5050 **Western Distribution Center** 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. DEC 2014

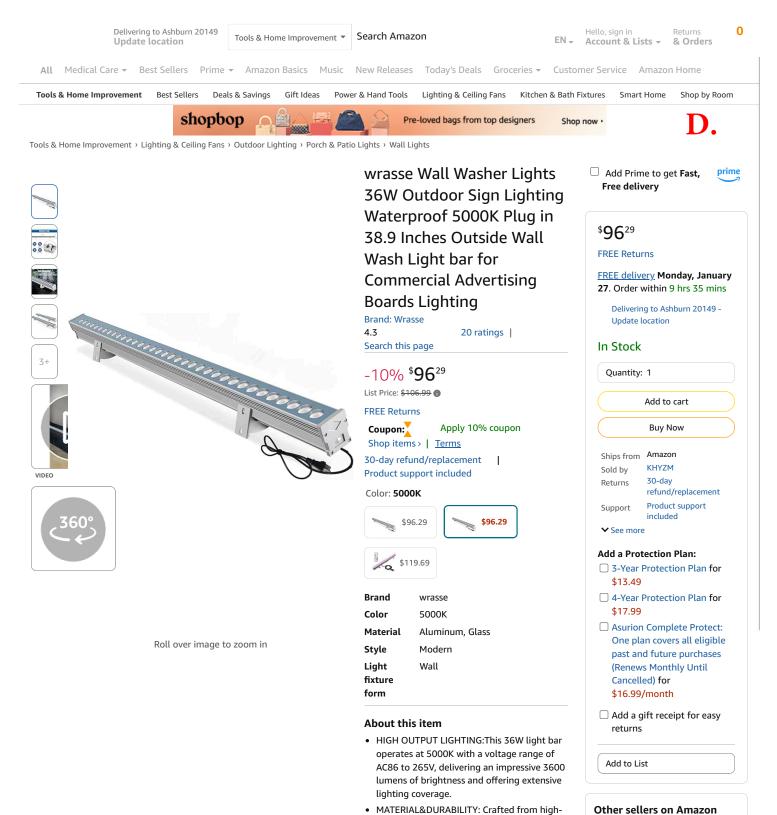

Other sellers on Amazon

New & Used (2) from \$5083 & FREE Shipping.

SAFE & WATERPROOF: This outdoor sign lighting with a 10 x 60° wider angle and IP65 waterproof rating ensures durability in various weather conditions.

quality aluminum housing and toughened glass, this outdoor wall washer light

guarantees exceptional corrosion and

efficiency.

oxidation resistance, ensuring long-term stability for outdoor wall washing. Its multislot design enhances heat dissipation

COMMERCIALC & INDUSTRIAL: this led linear light are perfect for commercial and

CHIKOUSA

PREMIER STEEL 4-CAR CARPORT/GAZEBO

The ChikoUSA Premier Steel 4-Car Carport / Gazebo is the most cost effective solar canopy solution in the market today! This elegant structure is designed with a beam and column configuration resulting in superior strength. Ease and speed of install are two important design benefits. This structure can accommodate a variety of panel sizes and configurations. The steel coating of Zinc-Aluminum-Magnesium (Zn-Al-Mg) or ZAM provides the best In class protection while delivering superior corrosion resistance.

PRODUCT LINE

Item **CK-QLCP-STEEL**

Product Name

Premier Steel 4-Car Carport/Gazebo

TECHNICAL DATA

| Main Material | : S350 Steel Zinc Aluminum Magnesium |
|---------------------------|--------------------------------------|
| | (Zn-Al-Mg) Coated |
| Wind Velocity | : Up to 115MPH |
| Snow Load | : Up to 15 PSF |
| Tilt angle | : 5 Degrees |
| Module Orientation | : Landscape & Portrait |
| Foundation | : 3 Footer Options |
| Waterproof | : Optional |
| Module Type | : 60, 72 Cell & Large Format |
| | |

ADVANTAGES

- Beautiful
- Easy installation
- Zinc Aluminum Magnesium (Zn-Al-Mg) Coated
- Anti-corrosion and anti-rust

FOOTER OPTIONS

Pier Pad Spread



COMPONENT LIST

| Material | QT |
|-------------|----|
| Column | 04 |
| M-Rail | 07 |
| C-Channel | 06 |
| Column Base | 04 |



US





101 East Baseline Road Buckeye, AZ 85326


: 1-800-948-5390 Tel Email : info@chikousa.com









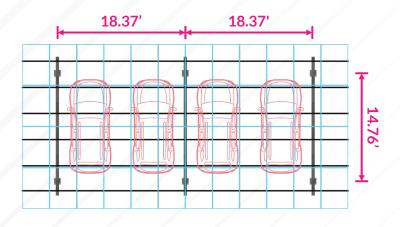

Overhead

Final Design can vary depending on Module Size, **Orientation, Wind & Snow Load, and Seismic Requirements**