


Position handrail
wall for
steps



#2, #3

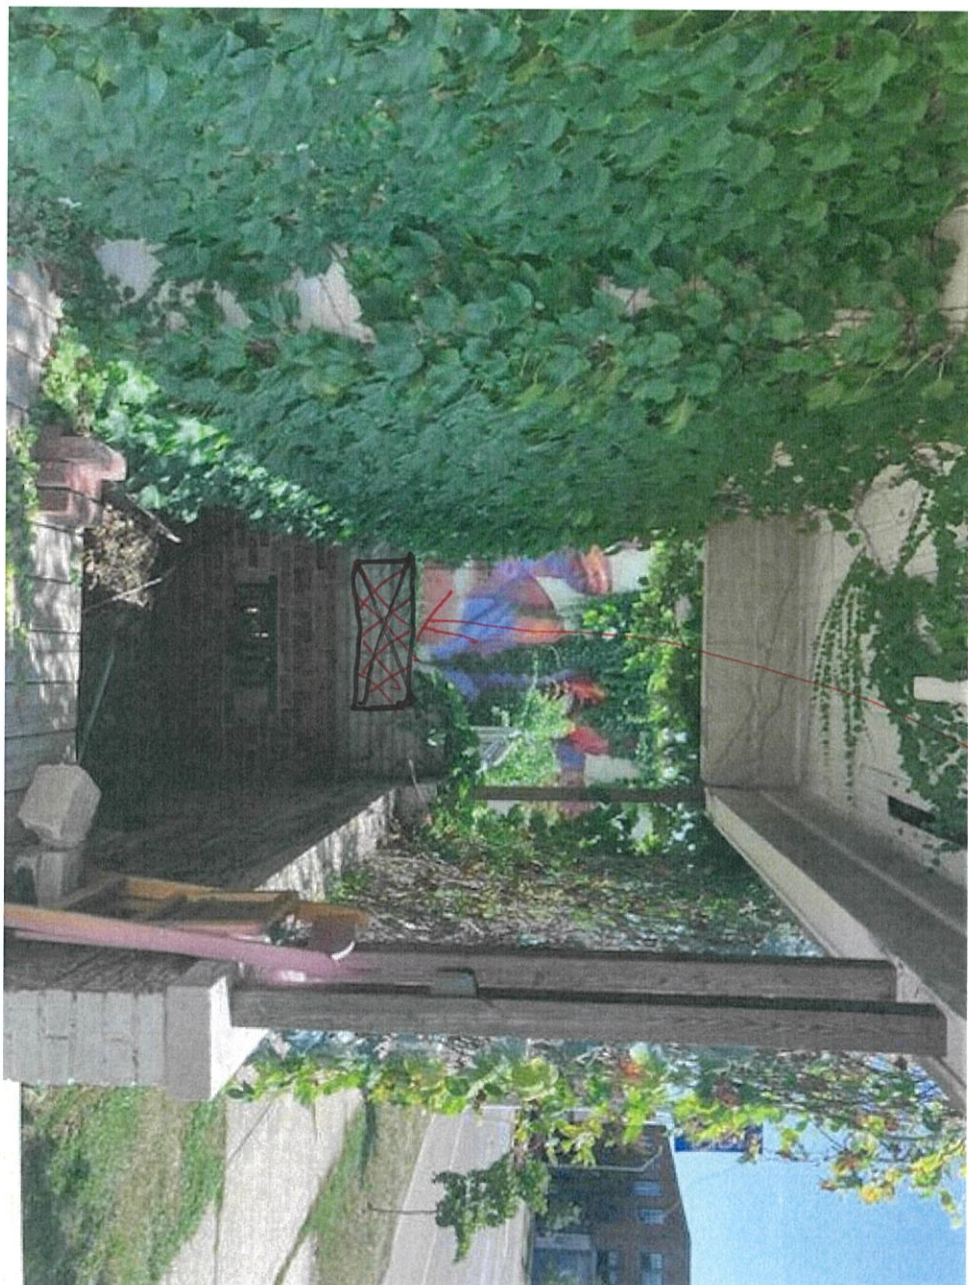

#7



Existing
stained
glass

42" Tall
4 ft to 8 ft + long

507 Door Construction

DOOR TECHNICAL DATA

April, 2015

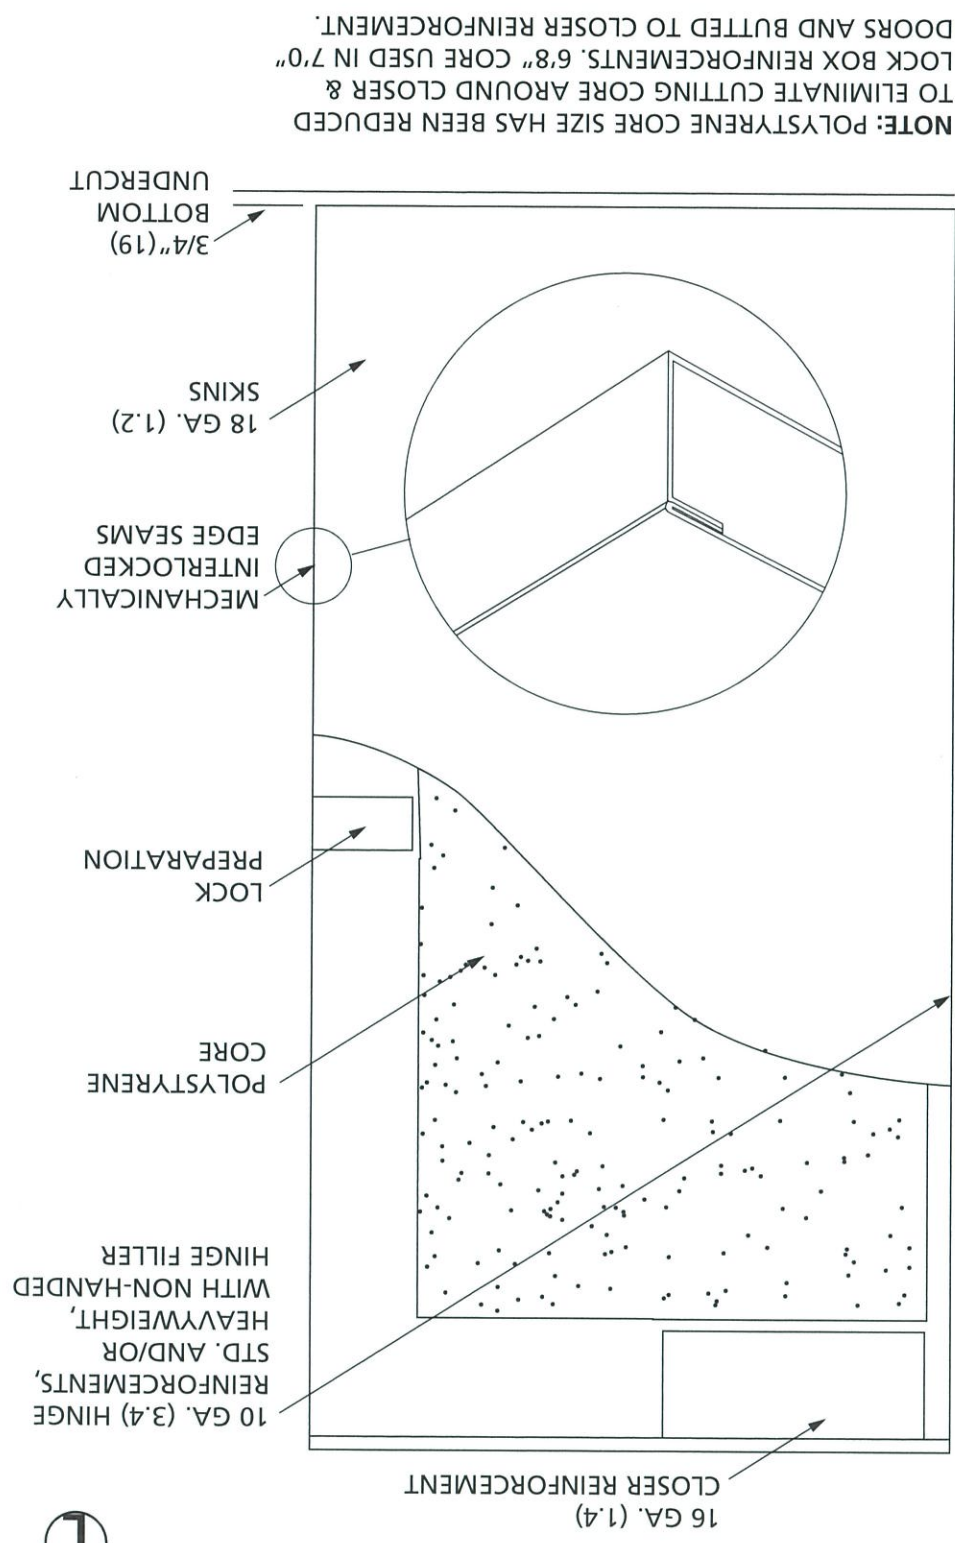


- PACKAGING**
- PALLETIZED 20 DOORS PER PALLET (20 DOOR MINIMUM ORDER PER SIZE)
 - NO DOOR WRAP

- HARDWARE PREPARATIONS**
- PER ANSI A250.6 AND A115.2 (CYLINDRICAL) AND A115.1 (MORTISE)
- 2-1/8" CYLINDRICAL LOCK (G2) (G2B)
 - 2-1/8" CYLINDRICAL DEADLOCK (G2)
 - COMBINATION G2 X G2, G2B X G2
 - MORTISE EDGE PREP ONLY (G3AEO)
 - RIM EXIT REIF. ONLY G11
 - BLANK LOCK G19

- DOOR SIZES**
- 2'6", 2'8", 3'0", 3'4", 3'6" X 6'8"
 - 2'6", 2'8", 3'0", 3'4", 3'6" X 7'0"

- 1 YEAR MANUFACTURERS WARRANTY**
- 18 (1.2) GAUGE COLD ROLLED STEEL OR A60 GALVANNEAL STEEL 1-1/2 HOUR WARNOCK HERSEY FIRE LABEL**

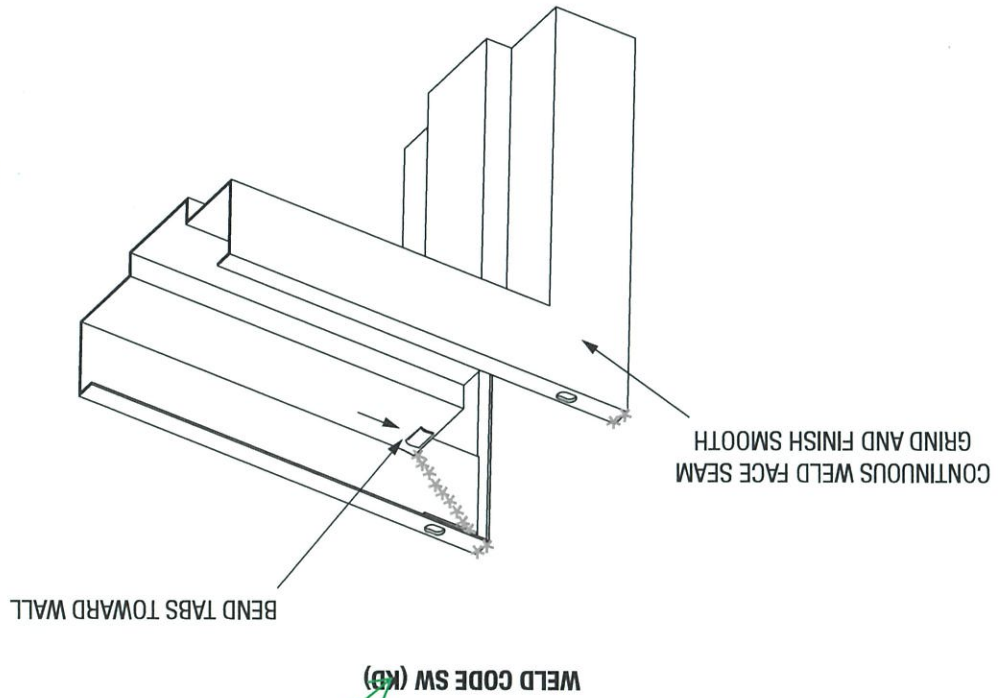

Saw Miter Weld

