

# ENTRANCES

## SERIES 550


### WIDE STILE ALUMINUM DOORS

For Heavy Traffic



A CRH COMPANY

usalum.com • crlaurence.com  
crl-arch.com

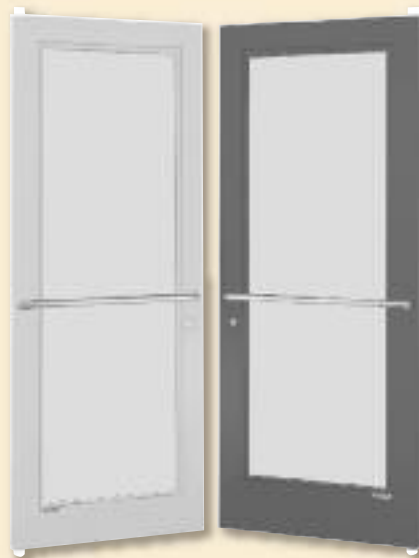

Series 550  
Wide Stile

- For 1/4 " or 1" (6 or 25 mm) Glazing
- Adjustable Weatherstrip Astragal at Meeting Stiles
- Accommodates Most Custom Hardware
- ~~Standard 1" (25 mm) Diameter~~
- ~~Solid Push/Pulls~~
- Exterior and Interior Applications
- Available for Center Hung, Offset Pivot, or Butt Hinge Applications
- Choice of Standard or A.D.A. Access Bottom Rails
- Clear Anodized and Bronze Anodized in Single or Pairs of Doors
- Custom Sizes, Finishes, and Options Available

Our Entrance Doors are consistently built to the highest industry standards, ensuring years of reliable service. All doors are supplied with push/pull hardware, maximum security locks, and easily accommodate a wide variety of custom hardware for specific job requirements.

# SERIES 550 WIDE STILE TYPICAL DETAILS

For 1/4" (6 mm) or 1" (25 mm) glazing

For Specifications,  
Details, and Testing  
Data go to  
[usalum.com](http://usalum.com).

PUSH BARS  $\bar{C}$

CYL.  $\bar{C}$

37-1/2"  
(952 mm)  
34"  
(863 mm)

CENTER HUNG  
DOOR

PULL  $\bar{C}$

CYL.  $\bar{C}$

42"  
(1067 mm)  
34"  
(863 mm)


OFFSET PIVOT  
DOOR

WS300

WS300


WS400

WS350/DN350

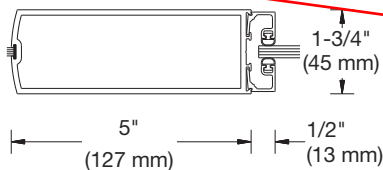

Single Door

CENTER HUNG DOORS




Meeting Stiles for Pairs of Doors

WS500

WS500


WS400

WS350/DN350

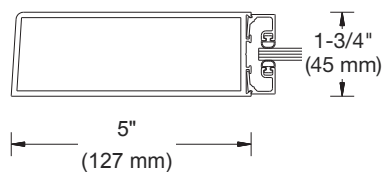


Single Door


OFFSET PIVOT DOORS




Meeting Stiles for Pairs of Doors

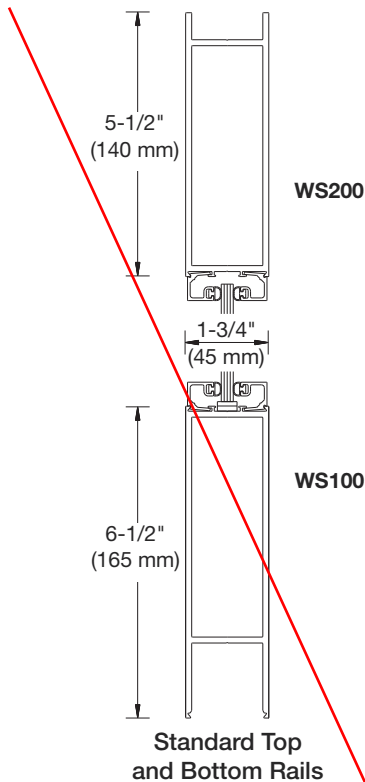

Standard Top  
and Bottom Rails

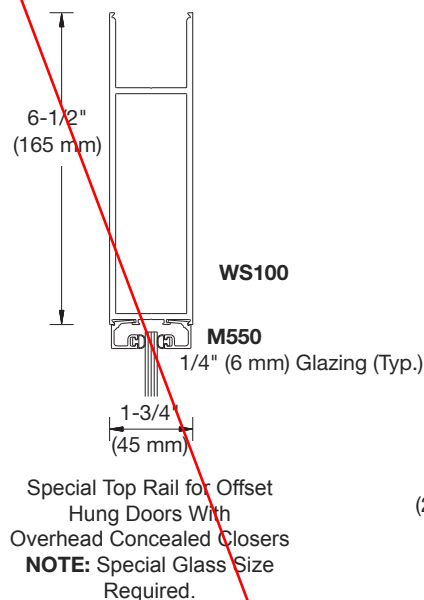

Special Top Rail for Offset  
Hung Doors With  
Overhead Concealed Closers  
**NOTE:** Special Glass Size  
Required.

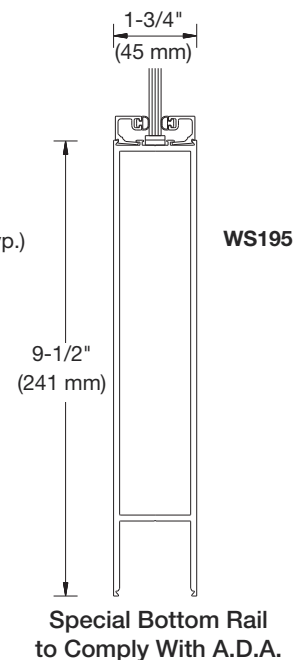

Special Bottom Rail  
to Comply With A.D.A.

ADA  
Bottom  
Rail on  
Door  
#112A.  
Custom  
20"  
bottom  
rails on  
doors  
#100A  
and 103.

NOT TO SCALE