

# 677 W Canfield St – Historic District Commission

Appropriateness Review: HDC2024-00404 – COA Conditions Proposal



# Brick Archway Restoration in Rear – Original



# Rear Elevation Change – Current



# Archway #1




## Challenge:

- Original archway location is partially destroyed by door rough opening
- There is not much brick remaining above the door rough opening

## Proposal 1: Leave as is

**Alternative Proposal 2:** Attempt to install an archway ~2 brick widths higher than original location above current door rough opening

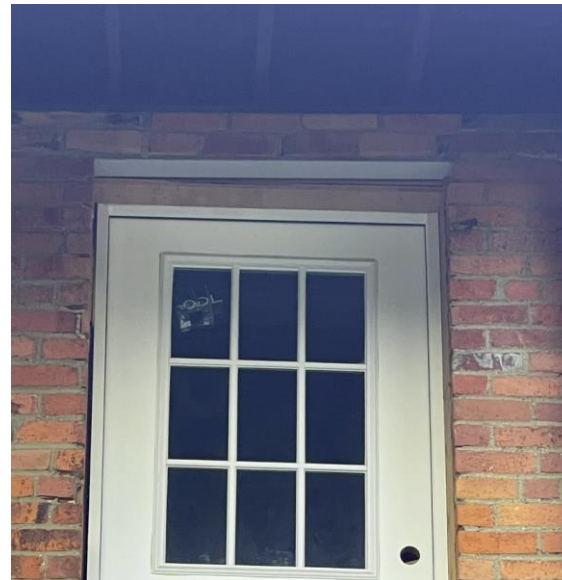

# Archway #2




**Proposal 1:** Install an archway at original location (adjacent to deck bond)

**Alternative Proposal 2:** Install an archway ~3 brick widths lower than original location.

- Might better “match” Archway #1  
Alternative Proposal 2

**Alternative Proposal 3:** Leave as is

# Archway #4 & 3

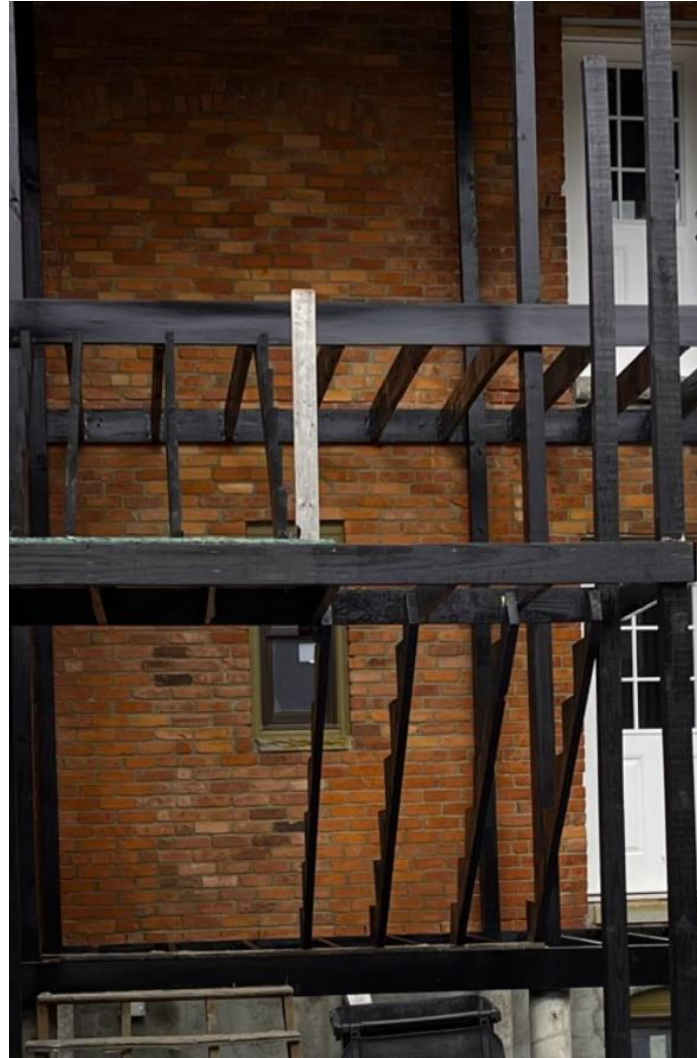

## Note

- The window was preserved but moved to center over toilet in interior.
- Archway #3 original location is partially destroyed by current window rough opening
- Original window rough opening is covered by sink and vanity on interior

**Proposal 1:** Install an archway over current window rough opening

**Alternative Proposal 2:** Install an archway at original location of Archway #4 only

# Archway #4 & 3 – Additional Photos



# Archway #5



**Proposal 1:** Preserve and rescind previous COA proposal of installing new window as this would destroy part of this archway

