

Job Name	
Order No.	

HITACHI

Submittal Data Sheet	PAS-12BUFASDQ1 / PPK-B12UFA1DQ
12,000 Btu/hr Wall Mount Heat Pump System	



Indoor Specifications				
Airflow Rate (cfm)	Cooling		Heating	
	Hi2	Hi	Hi2	Hi
	470	435	470	435
	M	L	M	L
	390	350	390	350
Sound (dBA)	40		40	
Dimensions (H × W × D) (in)	[12-13/32] × [[47-23/32] × 9-19/64]			
Airflow Inlet (H × W) (in)	[6-23/64] × [32-21/64]			
Weight (Lbs)	30.9			

Outdoor Specifications		
Compressor	KSN108D32UFZR	
Refrigerant	R32	
Factory Charge (Lbs)	1.98	
Refrigerant Oil	POE VG75R	
Airflow Rate (cfm)	Cooling	Heating
	850	850
Sound Pressure Level (dBA)	55	
Dimensions (W × H × D) (in)	[31-57/64] × [23-1/32] × [11-1/32]	
Weight (lbs)	77.2	

Efficiency			
Cooling		Heating	
SEER2	23.0	HSPF2	9.5
EER2	15.0	COP	3.9

Performance	
Cooling(Btu/hr)	
Rated(Min/Max)	12000(3200/14200)
Sensible @AHRI	9981.8
Operating Range	0°F~115°F
Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB	

Heating(Btu/hr)	
1:@ 47° Rated (Min/Max)	14000(3400/17400)
2: @ 17° Rated	9800
3: @ 5° Max: Capacity / COP	9800/2.1
Operating Range	-13°F~75°F
1: Rated Heating Conditions: Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB 2: Rated Heating Conditions: Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB 3: Heating Conditions; Compressor Operating at Max Frequency: Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB	

Electrical		
	208/60/1	230/60/1
ODU/IDU MCA	9.3/0.36	9.3/0.36
ODU/IDU MFA	15/15	15/15
Compressor RLA	6.3	6.3
Outdoor fan motor FLA	0.4	0.4
Outdoor fan motor W	40	40
Indoor fan motor FLA	0.29	0.29
Indoor fan motor W	35	35
MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A) RLA: Rated load amps (A) W: Fan motor rated output (W)		

Piping	
Liquid (in)	1/4
Gas (in)	1/2
Drain (in)	3/5
Max. Interunit Piping Length (ft)	164
Max. Interunit Height Difference (ft)	98.4
Chargeless (ft)	98.4
Additional Charge of Refrigerant (oz/ft)	0.194


Optional Accessories:

Description	Part Number
Wired Remote Controller	CIW03-H
Wireless Remote Controller (Included)	PC-LH8QE
airCloud Adapter	GA-WFG-N
Mini Central Controller	CCM01
Large Central Controller	CCL01
Central Touchscreen Controller	CCXL02
5 Wire Thermostat Adapter	C3STAT01
5 Wire Thermostat, Wi-Fi, Modbus/BACnet	C4STAT01
Remote Controller Cable 16.4 Ft	PRC-5K
Remote Controller Cable 32.8 Ft	PRC-10K
Remote Controller Cable 49.2 Ft	PRC-15K
Motion Sensor Kit	SOR-NEZ
BACnet/ Modbus Gateway	HBN200-PRO
Condensate Pump	DPWM-83819
Auxiliary Heat CN25 Connector	PCC-CN1925-H
Remote Sensor	THM-R2A
Front Wind Baffle	LACFWB0912
Back Wind Baffle	LACBWB0912
Side Wind Baffle	LACSWB0912
Small front snow hood	SNWHDFSML
Small back snow hood	SNWHDBSML
Small side snow hood	SNWHDSML


Dimensional Data:

Indoor Unit:

PPK-B12UFA1DQ

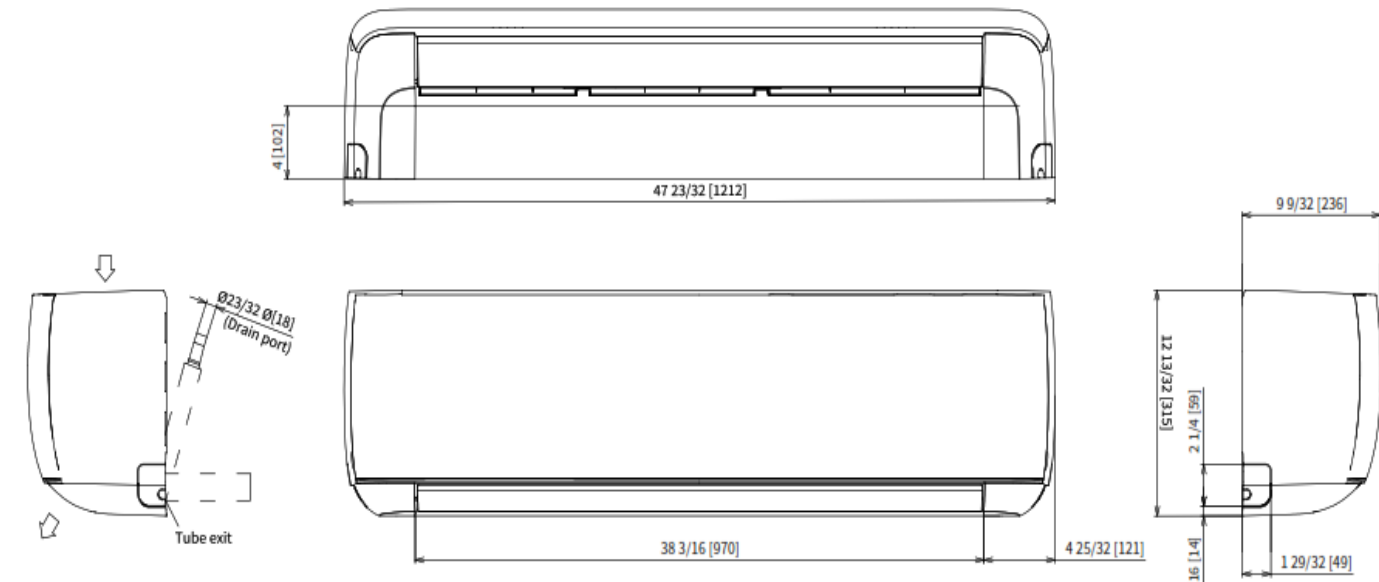

Ceiling

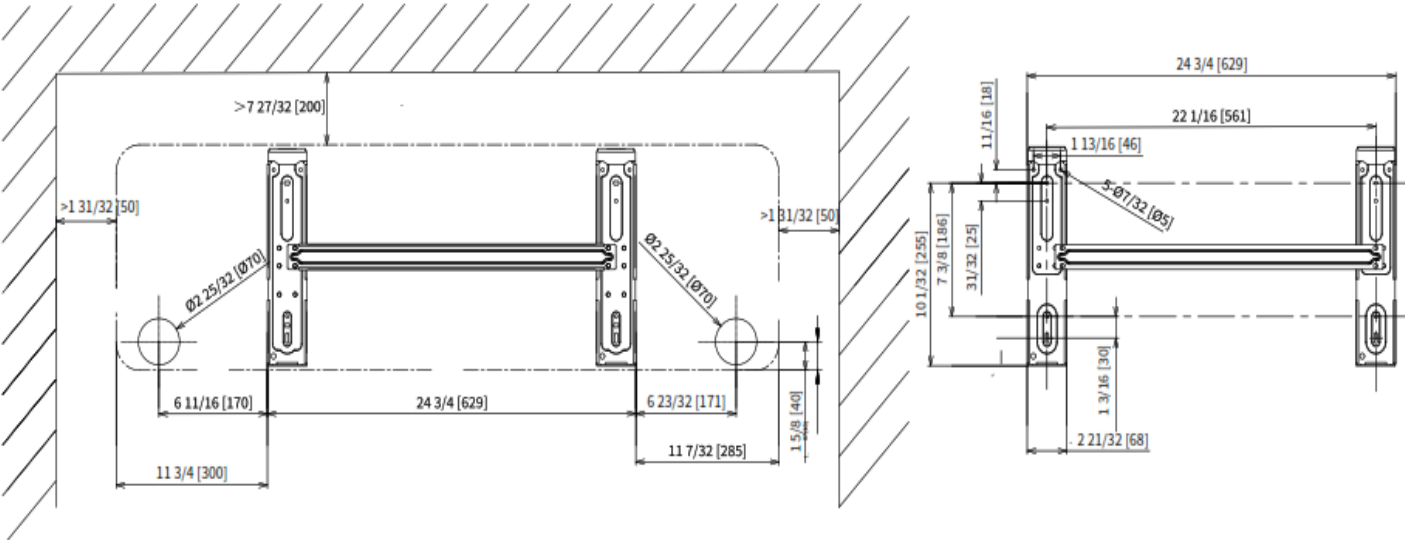


Left

Right


Outdoor Unit:

Models: PAS-09~12BUFASDQ1


Unit: in. [mm]

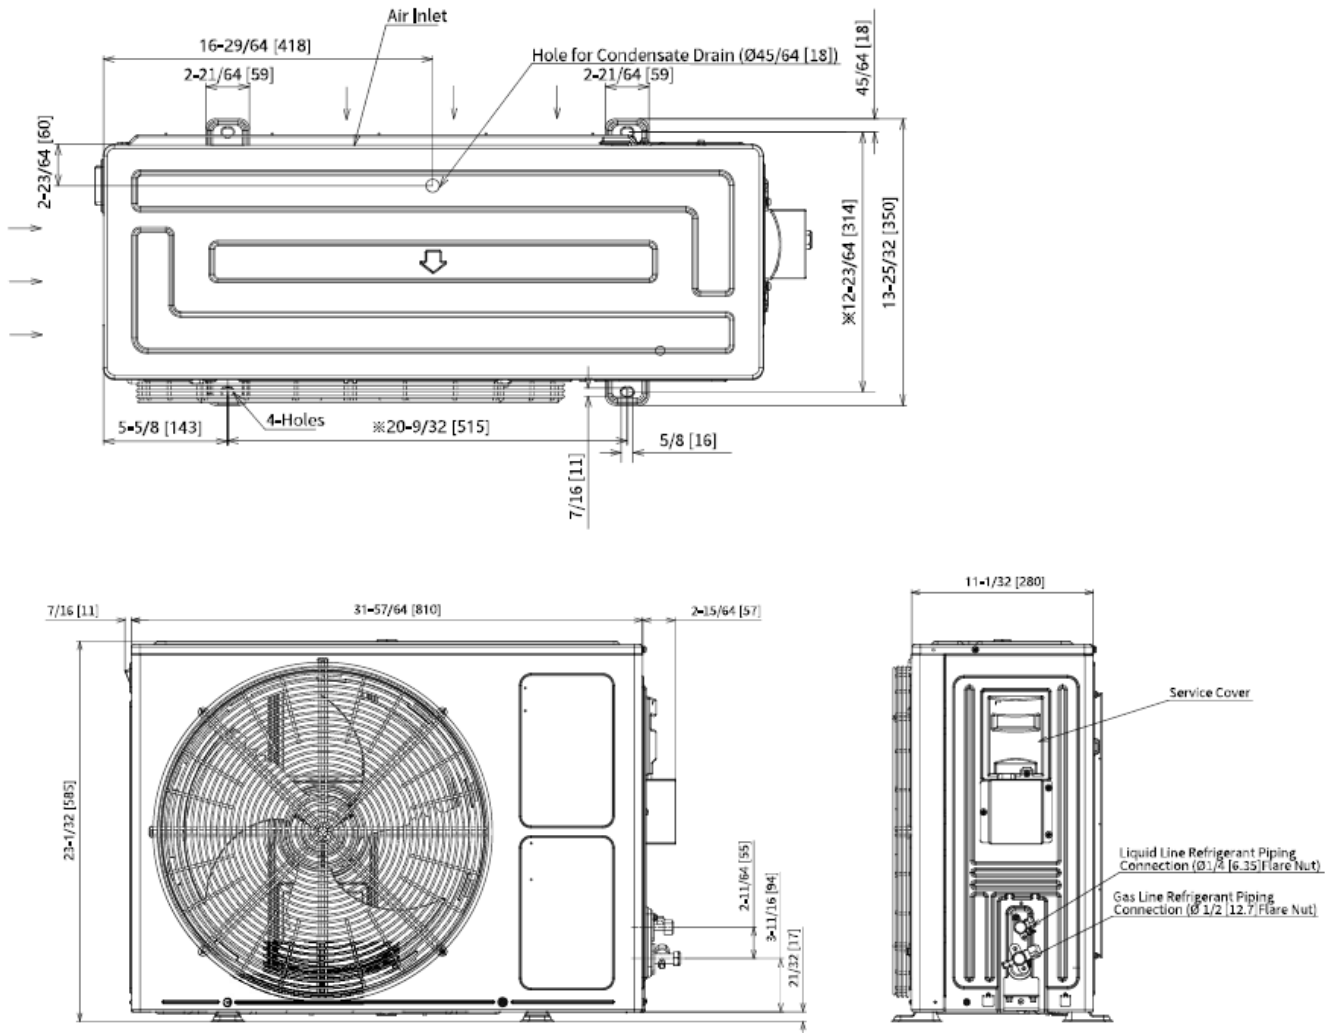

- In case of obstacles on both sides, and no obstacles of upper side

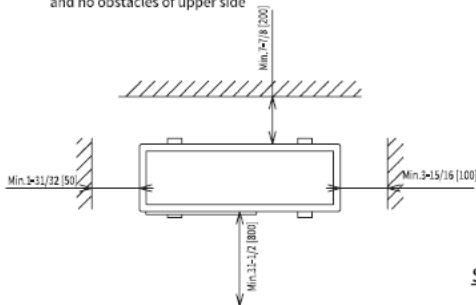

- In case of NO obstacles on both sides, and no obstacles of upper side



Service Space

NOTES:

- Refrigerant is factory charged for actual piping length and no additional charge less than 118-7/64 inches(3000mm) is required in the field. Additional charge more than 118-7/64 inches(3000mm) is required in the field.
- The dimension marked with ※ indicates the mounting pitch dimension for anchor bolts.

Drain Water

Drain water is caused during a defrosting operation.

- Choose a place where well drainage is available. Provide a groove for drain.
- Do not provide an upward slope from the unit to avoid reverse flow of the drain. Provide a second drain pan under the outdoor unit to collect drain water securely.